

3/9.

408

PALESTINE GOVERNMENT.

File No 1.

Public Works Headquarters.

Erection of Schools in Palestine - Kadoorie Bequest.

מדינת ישראל

מגזר הסכנים



Schools: Kadoorie Bequest - Erection of
Schools in Palestine

מ-12/4092

שם תיק: מזהה כיון

מזהה פריט: 0006

29/03/2016 תאריך הדפסה

כתובת: 2-108-5-8-8

ארץ

ממשלו

Opened on: 11-12-22

14/7/1/6. :

3rd January, 1922.

Chief Secretary.

Subject : Mt. Tabor Agricultural
School - Contract H.Q. 247.
Reference: Your A/36/32 of 18.8.36.

I have to report that the case under review was settled by arbitration and in order to meet the liabilities agreed upon it is found necessary to make application for Special Warrant for the amount of £3,530 which represents outstanding claim plus interest charges.

I am therefore submitting the necessary application direct to the Accountant General in anticipation of your approval.

Sgd. R.W. Price

f. DIRECTOR OF PUBLIC WORKS

Copy to: Accountant General
with application for
Special Warrant No. 90
in quadruplicate.

14/7/1/13.

3/9. ✓

PALM

התביעה נגד הממשלה
Protest for No


104


DEPARTMENT OF AGRICULTURE
AND FISHERIES,
P.O.B. 667,
JERUSALEM.

AG/70/66/26

22nd March, 1939. J.H.W.

TREASURER.

CE. 
EF  2.6.39

M. A.N. 1/1
May A.N. (2)


Subject: Expenditure on behalf of the Army during disturbances - Handing Over and taking over of Kadoorie Agricultural Schools.

In reply to the Deputy Treasurer's enquiry by telephone on 25th February, 1939, I have to inform you that both the Kadoorie Agricultural Schools (Tulkarm and Mt. Tabor) were handed over to the military authorities in accordance with Chief Secretary's Circular No. 94 of 10th October, 1936, the existence of which was unknown to this Department at the time, but the instructions contained therein appear to have been complied with.

2. When the two school buildings were requisitioned they were duly handed over in the presence of a representative of the Army, the Principal of the School, a representative of the Public Works Department, and in the case of Tulkarm, the District Administration. A statement of the accommodation taken over was recorded on Billeting Form A and signed by all concerned. A statement of the condition of the buildings and fittings taken over was drawn up, signed, and attached to the Billeting Form. Amended inventories and statements of condition of buildings, etc. have been drawn up when there have been changes in the occupying unit as well as after periodic inspections.

3. No rent has been claimed or paid by the Army on account of the buildings occupied and, in fact, Form A shows that no rent is payable as the accommodation was requisitioned.

Handwritten notes in the top left corner, including the word "CE" and some illegible scribbles.



4. With regard to electric light and water the position is as follows :-

Tulkarm:

After negotiations with the A.A. & Q.M.G. it was agreed that, as the School and farm had been completely evacuated and closed down by this Department, the Army should take over the power-house and plant for the purpose of supplying their own light and water. The Army also agreed to take over the School Mechanic and be responsible for his salary. The cost of all supplies necessary for the working and maintenance of the power plant have since been met by the Army. Current for lighting and power is normally obtained from the Palestine Electric Corporation and the Army have been paying their accounts direct except in the case of meter rent, amounting to 70 mils a month, which has continued to be paid by this Department as the meter is registered in the name of the School.

Mt. Tabor:

In the case of Mt. Tabor all current for light and power is generated by the School power-house, and as the staff and farm stock were not evacuated, and no metres were installed it has so far been impossible to come to an agreement with the Military Claims Officer, Wai as to the estimated amount of light and water consumed by the occupying unit. The Station Engineer at the School in co-operation with the Engineer in Charge, Nazareth District, have estimated the amount of electric current and water consumed by the Army on a daily average basis. I will inform you of the result of negotiations as soon as the matter is settled.

5. It is suggested that the time is not yet opportune to estimate claims for compensation arising from the occupation of the school buildings as the Army are still in occupation and it is difficult to make a thorough inspection in these circumstances. It is presumed that when the buildings are evacuated by the Army suitable action will be taken in accordance with paragraph 9 of the above-quoted Chief Secretary's Circular.

CENTRAL REGISTRY
File No. 39
23 MAR 1939
P.W.D. H. C. J. A.

(Signed) F. R. MASON.

ACTING DIRECTOR OF AGRICULTURE
AND FISHERIES

Copy to: Director of Public Works. ✓
" " District Commissioner, Galilee and Acre, Nazareth.
" " Assistant District Commissioner, Tulkarm.
" " Engineer in Charge, Nablus.
" " Engineer in Charge, Nazareth.
" " A/Principal, K.A.S. Tulkarm.
" " Principal, K.A.S. Mt. Tabor.

14/7/11
14/7/11
14/7/11

WILLIAM A. WATSON

Entered as "Reply" by
Entered in "In Book" by
by

34/49

November 11th, 1935

Director of Agriculture
and Forests,

Subject : Maintenance of Kadoorie
Agricultural Schools.

25/11 7 24 in 34/49

I forward herewith copy of letters
1/3/19 and 1/9/12 of 4.11.35 from Engineer
in charge Nablus and Nazareth for your infor-
mation.

Provision for the Maintenance of
Buildings and Furniture has been made in my
Draft Estimates for 1936-37 and I shall be
glad if you will include in your estimates
provision for the maintenance of machinery.

Sgd. R. Hedley

for DIRECTOR OF PUBLIC WORKS.

Copy to: 3/9 ✓

" " 14/4/1.

" " 14/7/1.

3.

Subject : Works to be carried out at the
Kadoorie Agricultural School
Mount Tabor.

101

(3)

Letter from Director Public Works @ 2.10.35
Kadoorie Agricultural School maintenance.

(4)

The Treasurer

For favour of advice, please.

2. I see that the endowment fund of the Kadoorie agricultural schools produces LP.3,500 a year (item 25 of Revenue Head IV, page 14 in the Revised Estimates) while the cost of the two schools in 1935-36 is LP.13,500 odd (pages 66 and 67 ditto). Presumably, therefore, Government in effect subsidises them in the amount of the difference, but I understand they are regarded in all respects as Government institutions.

3. Small votes are apportioned to each for maintenance of buildings (items 303 and 334 of Head XIII), but I am inclined to agree with paragraph 2 of (3) that in future years provision could with advantage be included under the P.W.R. Head. What do you think?

4. With particular reference to (1) and paragraph 4 of (3), is there any objection to debiting the P.W.R. Minor Works vote now with LP.25 for the urgently necessary repair of the Dutch barn?

Sgd. J.V. Shaw

5.10.35.

for Acting Chief Secretary.

2.

(5)

Chief Secretary

I have no objection to action being taken
as proposed in paras 3 and 4 of (4).

Intld. G.H.A.

15.10.35.

for Treasurer

(6)

D.P.W.

F.N.A., please accordingly.

Intld. J.V.S.

16.10.35.

for Chief Secretary

(7)

Chief Secretary

Noted for action.

Sgd. V. Kenniff

21.10.1935.

for D.P.W.

*Copy to: 3/9 ✓
24/66/14.*

Original in 14/7/1

14/7/1.

October 2, 1935.

23-14/7/1 5-4

Chief Secretary.Subject:- Kadoorie Agricultural School.Reference:- Your W/139/35 of 15-8-1935.

The two services in question are Minor Works within the meaning of G.R.316 (1) and if provision for same is to be made in the Annual Estimates of this department the appropriate vote would be "Minor Works" under the head "Public Works Recurrent". The execution of minor works for the Kadoorie Agricultural Schools from a P.V.D. vote would, however, constitute a departure from the instructions given in your letters No.3462/30 of 2-9-1930 and No.A/14/31 of 23-4-1931, copies attached for easy reference. 99

2. I am not aware as to whether any funds are provided in the Kadoorie Bequest for the maintenance of the two agricultural schools but as they are Government institutions in every respect it is no doubt the intention of Government that they should be properly maintained irrespective as to whether any funds provided for maintenance in the Bequest are sufficient or otherwise. I therefore consider that similarly to all other school premises or buildings in occupation by the Department of Agriculture

and Forests they should be maintained by the P.W.D. as a charge against the provision under the relevant votes of the Head "Public Works Recurrent"; the funds, if any, provided in the Bequest for maintenance to be credited to General Revenue.

3. I suggest that the proposal made in the preceding paragraph should be given effect as from 1-4-1936 and that I should be authorised to make adequate provision for the maintenance services in the draft 1936-1937 Estimates of this department.

4. In the meantime the Director of Agriculture and Forests has represented that the covering of the barn is an urgent work to prevent damage to fodder stored therein valued at LP.130. The cost of the work is estimated at LP.25 and I can find funds now from Minor Works if you so approve.

(Sgd) V. KENNEDY

DIRECTOR OF PUBLIC WORKS.

Copy to 14/4/1.
" " 3/9.
" " 14/7/11.
" " 24/6/14.

D4.

REFERRED TO

8/102

A/14/31

23rd April, 1931.

Director of Agriculture
and Forests.

Subject : Kadoorie Agricultural
School, Tulkarm Maintenance.

Reference: Your letter No.15/A of the
29th January, 1931.

I am directed to inform you that
it is agreed that you should allocate to the
Department of Public Works sufficient funds
for the maintenance of plant, buildings and
new minor works.

2. I am to request you, however, to
submit particulars of the new minor works
required.

Sgd. H.M. Foot

for CHIEF SECRETARY.

5.

2nd September, 1930.

Director of
Agriculture and Forests

Subject : Kadoorie Agricultural Schools.

Reference: Director of Public Works'
letter No.14/4/1 dated the
12th August, copy to you.

I am directed to inform you that the Director of Public Works will be responsible for all works services in connexion with the Kadoorie Schools but the expenditure must be defrayed from the funds of the Schools. You should accordingly make the necessary provision under the various sub-heads mentioned in the letter under reference, if you have not already done so, in the revised statements for the recurrent expenditure of the Schools which you have been asked to frame.

Sgd. Max Nurock

ACTING CHIEF SECRETARY.

14/4/1

August 12th, 1930.

98

Chief Secretary

Subject : Tulkarm Agricultural
School.

I shall be glad to be informed if this Department will be required to carry out, from its recurrent votes, works maintenance services for the above school which was constructed from funds of the Kadoorie Bequest.

If your reply is in the affirmative necessary provision will have to be made in the 1931 Estimates under the following subheads :

Maintenance of Water and Electric Light
Plant.

Maintenance of Buildings.

Minor Works

Water Supply and Conservancy.

Maintenance of Furniture.

Sgd. J.F. Rowlands

Actg. DIRECTOR OF PUBLIC WORKS.

Copy to: Director of Agriculture & Forests

3/9

34/44.

34/27.

September 30, 1934.

Acting Treasurer.

Subject:- Audit Query No.
C/1550/1933-34
dated 2-8-1934.

Reference:- Your DH/54 of
18-8-1934.

No debits are passed on account of the services of members of the permanent establishment to any works itemised under Public Works Extraordinary, either in respect of salary, travelling, or subsistence. Since the construction of the Agricultural Schools was commenced they have been treated as in this category and no charges in respect of the permanent establishment have ever been debited to these buildings.

You were duly advised of the above arrangement in connection with the query raised by the Auditor in March 1931, in my letter No. 34/27 of 5-5-1931, copy of which is attached.

The Audit Query is herewith returned.

Copy to: 3/9 ✓
14/4/1
14/7/1

Signed J. F. ROWLANDS

For

DIRECTOR OF PUBLIC WORKS.

34/27.

May 5th, 1931.

Treasurer.81st 34/27 x.6

Subject:- Audit Query No. 588 (130)
B/1930 dated 20-3-31,
attached.

Reference:- Your Y/16/182 of 22-4-31.

The statement made by the Engineer in Charge, Nazareth District, in his letter No. 8/2/6 of 3-4-1931, copy enclosed with the Audit Query is not correct and the Engineer in charge is being advised accordingly.

2. The construction of the Kadoorie Agricultural Schools at both Tulkarm and Mount Tabor is treated as a Government service and the procedure with regard to departmental charges followed on Public Works Extraordinary services is applied in the case of these two buildings.

Charges such as travelling allowances and railway fares of officers employed on these buildings or Headquarters officers inspecting same, telephone calls, etc., are met from the relevant votes under the head "Public Works Department" - 'B' Other Charges". Further, similarly to issues made for Public Works Extraordinary works no departmental expenses are charged in respect of unallocated stores issued for Kadoorie Schools.

3. The Audit Query is herewith returned.

Signed: Fawcett Pudsey

DIRECTOR OF PUBLIC WORKS.

Copy to: Engineer in Charge,
Nazareth District, for
information and guidance.

" " 3/9.

95

COPY

14/4/1

16th November 1933

Treasurer.

Subject : Agricultural School, Tulkarm
do. Mt. Tabor.

Reference: Your telephone message 16-11-33.

The following amounts are expected to
be spent at above :

Agricultural School, Tulkarm.

Period 1-10-33 - 31-12-33	LP.20
" 1-1-34 - 31-3-34	<u>42</u>
Total	LP.62

Agricultural School, Mt. Tabor.

Period 1-10-33 - 31-12-33	LP. 3.140
" 1-1-34 - 31-3-34	<u>8.-</u>
Total	LP.11.140

sgd. G.T. Caryer

Copy to 14/7/1 ✓
3/9
14/7/1/6

3/9

94
1st February, 1933.

Treasurer

Subject : Tulkarm and Mount Tabor
Agricultural Schools. 93

Reference: Your 454/495 of 16.1.1933.

The following amounts are expected
to be spent during the period 1.1.1933 to
31.12.1933.

Agricultural School Tulkarm.

Head I Land & Development	LP. 255.-
Head III Farm Buildings	40.-
Head VII Power & Transmission	60.-
	LP. 355.-

Mount Tabor Agricultural School.

Head I Land & Development	LP. 1, 140.-
Head II School Buildings	16, 129.-
Head III Farm Buildings	, 818.-
Head VII Electric Power	4, 652.-
	LP. 22, 739.-

Grand Total LP. 23, 094.-

Please make this amount available
as and when required.

Sgd. R. HEDLEY
FOR
DIRECTOR OF PUBLIC WORKS.

Copy to: 14/4/1
14/7/1
14/7/16.

22222.

Tel. Address : TREASURY, JERUSALEM.
Tel. No. : JERUSALEM 85.

In your reply please quote

No. 454/495.


93
THE TREASURY,
JERUSALEM.

16th January, 1933.

Director,
Department of Public Works.

In Charge
A. J. P. W.
Qu.
A.
Subject : Tulkarem and Mount
Tabor Agricultural
Schools.

I shall be obliged if you
will furnish me as early as possible
with a statement showing separately
the estimated expenditure under your
control in respect of the construction
of the above schools during the period
1st January to 31st December, 1933.



S. Hawing
TREASURER.

REPLIED *94*

RT.

THE LIBRARY
OF THE
BUREAU OF
INDUSTRIAL
HYGIENE

RECEIVED
JUN 10 1914
U.S. DEPT. OF
LABOR

THE
BUREAU OF
INDUSTRIAL
HYGIENE
U.S. DEPT. OF
LABOR
WASHINGTON, D.C.

RECEIVED
JUN 10 1914
U.S. DEPT. OF LABOR
WASHINGTON, D.C.

3/9

9th September, 1932.

Director of Agriculture
and Forests

Subject : Kadoorie Agricultural
Schools Tulkram & Mt. Tabor.

Reference: C.S. letter A/131/32 of
17.8.32 copy to you.

89

I forward herewith for further
action in accordance with Chief Secre-
tary's instructions, statements of
allocations with actual and anticipated
expenditure on both Tulkram and Tabor
Agricultural Schools.

90-91.

Sgd. R. HEDLEY
For.

Actg. DIRECTOR OF PUBLIC WORKS.

Copy to: 14/4/1
14/7/1/6
22222.

Details of Expenditure	Allocations		Actual Expenditure to 31st December 1931	Expenditure from 1st January to 31st March 1932	Required in 1932/33		Balance required to complete work	TOTAL	Saving	Excess	Remarks
	Initial	Supplementary			Expenditure 1-4-32 to date	Foreseen requirements 31-3-33					
	IP.	LP.	LP. Mils	LP. Mils	LP. Mils	LP. Mils	IP.	IP. Mils	IP. Mils	LP. Mils	
Brought forward	29,529	2,986	32,515	5,455.407	1,670.418	2,553.735	13,184	27,779.360	7,247.172	2,511.582	
7. Electric Power & Lighting											
(a) Transmission	29 220		220			431,334X	-	233,000X	220.-		Scheme replaced by item (f) below.
(b) Motors & shafting farm Machinery	83	450	533		111.116	421.884	-	533.000			See footnote.
(c) Lighting	330		330		66.535	243.465		330.000			do.
(d) Telephone & bells	55		55	19.269	2.750	27.461		55.000			do.
(e) Power Station and Generating Plant											
(f) Electrical Transmission							3,850.-	3,850.000		3,850.-	My 14/7/1 of 22-4-32 to C.S. refers.
(g) Heating & Cooking Appliances.							640	640.000		640.-	
							465	465.000		465.-	
TOTAL	30,217	3,436	33,653	5,474.676	1,673.168	2,756.896	18,139	33,652.360	7,467.172	7,466.582	

x The foreseen requirements for 1932-1933 can be spent only if instructions to proceed with the work are issued forthwith.

SIR E. KADDOORIE REQUEST.

TULKARM AGRICULTURAL SCHOOL.

STATEMENT OF ESTIMATES AND EXPENDITURE IN RESPECT OF VOTES CONTROLLED BY
THE DIRECTOR OF PUBLIC WORKS

Details of Expenditure	Allocations		TOTAL LP.	Actual Expenditure to 31st December 1931 LP.Mils	Expenditure from 1st January to 31st March 1932 LP.Mils	Required in 1932/33 LP.Mils	TOTAL LP.Mils	Saving LP.Mils	Excess LP.Mils	Remarks
	Initial LP.	Supplementary LP.								
1. Land and Development										
(a) Water Supply Reservoir Pumps }	2,956		2,956	1,827.459	21.61	237.-	2,086.103	869.897		Work completed
(b) Fencing	350	35	385	381.458			381.458	3.542		do.
(c) Diversion of Main Road						110	110.-		110.-	To start shortly in connection with other P.W.D. road work.
2. School Building.										
(a) School	8,400	450	8,850	10,795.631	3.08		10,798.711		1,948.711	Completed
(b) Heating	150		150	77.560			77.560	72.440		Completed
(c) Furniture	950	156	1,106	689.006			689.006	416.994		Completed
3. Farm Buildings										
(f) Farm Building including fitting and tramway etc.	7,980	276	8,256	6,984.253	86.60		7,070.862	1,185.138		Completed
(g) Dairy	1,200		1,200	1,222.262			1,222.262		22.262	Completed
(h) Dutch Barn	200		200	157.193			157.193	42.807		Completed
(j) Tobacco Building	300		300					300.-		Completed
(k) Fruit Drying Building	415	250	665	573.672		100.-	673.672		8.672	Waiting arrival of machinery.
(l) Poultry and apiary	300		300	286.137			286.137	13.863		Made by Dir. of Agriculture.
(m) Dipping Tank	325	50	375	335.828			335.828	39.172		Completed.
7. (n) Engine Transmission and lighting.	1,590	350	1,940	2,677.699	0.064		2,677.635		737.635	Completed.
Compensation to Injured workmen.				23.400	90.000		113.400		113.400	
	25,116	1,567	26,683	26,031.586	201.239	447.-	26,679.627	2,943.853	2,940.680	

SIR E. KADOORIE REQUEST.

JEWISH AGRICULTURAL SCHOOL - MOUNT TABOR.

STATEMENT OF ESTIMATES AND EXPENDITURE IN RESPECT OF VOTES CONTROLLED
BY THE DIRECTOR OF PUBLIC WORKS

Details of Expenditure	Allocations		TOTAL LP.	Actual Expenditure to 31st December 1931 LP.Mils	Expenditure from 1st January to 31st March 1932 LP.Mils	Required in 1932/33		Balance required to complete work. LP.	TOTAL A+B+C+D+E LP.Mils	Saving LP.Mils	Excess LP.Mils	Remarks
	Initial LP.	Supplementary LP.				Expendi- ture 1- 4-32 to date LP.Mils	Foreseen require- ments to 31-3-33 LP.Mils					
	LP.	LP.	LP.	LP.Mils	LP.Mils	LP.Mils	LP.Mils	LP.	LP.Mils	LP.Mils	LP.Mils	
1. Land and Development.												
(a) Reservoir	2,145		2,145	918.930	71.098	43.040	-		890.872	1,254.128		
(b) Pumps and Motors	275		275	162.122	12.660	-	300.000		474.782		199.782	See footnote
(c) Piping	385		385	172.931	-	-	100.000		272.931	112.069		do.
(d) Pump house	80		80	24.322	-	-	170.000		194.322		114.322	do.
(e) Well	415	1,500	1,915	273.930	-	-	641.000		914.930	1,000.070		do.
(f) Fencing to site	1,386		1,386	947.406	9.100	9.100	-		965.606	420.394		
(g) Farm roads & culverts	550		550	413.998	3.500	-	-		417.498	132.502		
(h) Levelling sites of Buildings	275		275	287.438	-	-	-		287.438		12.438	
(j) Preliminary site works	220		220	241.402	-	-	-		241.402		21.402	
(k) Irrigation works (for Agr.)			7251 559	89.825	89.825	-	-		9.781			
2. School Building.												
(a) Main structure	11,440	620	12,060	16.200	-	-	2,000.000	12,113	14,129.200		2,069.200	do.
(b) Hot water supply	155		155	-	-	-	-		-	155.000	-	
(c) Furniture & fittings	933	156	1,089					807	807.-	282.-		Cost of fittings incl. under 2a&7g
3. Farm Buildings												
(a) Main structure incl. silo & manure pit.	6,778	380	7,158	800.028	1,457.868	1,729.055	918.-		4,904.951	2,253.049		Building nearing completion.
(b) Tramway	230		230	-	119.407	2.400	40.-		161.807	68.193		
(c) Manure carrier	85		85	376.052	4.536	-	348.800		729.388		94.388	
(d) Stable fittings	550		550									
(e) Paddock & Yard enclos	140		140				68.-		68.-	72.-		
(f) Dairy	1,187		1,187	196.271	41.452	425.840	300.-		963.563	223.437		Can be spent if machinery arrives in time to complete work this year
(g) Dutch Barn	242		242	130.308	6.640	-	-		136.948	105.052		
(h) Tobacco curing house	786		786							786.-		
(j) Fruit canning house	480	330	810	92.167	77.480	344.300	30.-		543.947	266.053		Scheme abandoned.
(k) Poultry houses	176		176					176	176.-	-		Reallocated to Dir. of Agr.
(l) Apiary	88		88					88	88.-			Reallocated to Dir. of Agr.
(m) Dipping Tank	528		528	312.077	98.698				410.775	117.225		
Carried forward	29,529	2,986	32,515	5,455.407	1,670.418	2,553.735	4,915.800	13,184	27,779.360	7,247.172	2,511.532	

Government of Palestine

89

In case of reply
please quote the
date of this letter
and the following
number:

A/131/32.

Chief Secretary's Office,
Jerusalem,

17th August, 1932.

Statement
for Palestine
Cultural - Agriculture (with 2)
OK 12.7.32 Mr. Con

Director of Public Works.
Director of Lands.
Director, Department of Health.

A. N. P. W.

Subject: Kadoorie Agricultural
Schools, Tulkarm and
Mount Tabor.

B. K.

A.

U.S. 1878

I am directed to request that you
will submit to the Director of Agriculture
and Forests as soon as possible a statement
of allocated, actual and anticipated
expenditure by your Department on both
Agricultural Schools in the form of which
a specimen is attached.

2. It is desirable that in filling
out the form you consult with the Director
of Agriculture who will advise as to the
precise particulars to be shown. He will
then present a complete statement, in-
cluding that of his own Department, for
the whole of the works.



see memo

for CHIEF SECRETARY.

Copy to: Director of Agriculture.

DEALT WITH 192

KADOORIE AGRICULTURAL SCHOOL, TULKARM/MOUNT TABOR.

STATEMENT SHOWING ESTIMATES AND CAPITAL EXPENDITURE IN RESPECT OF VOTES CONTROLLED BY THE DIRECTOR OF AGRICULTURE.

(1)	(2)		(3)	(4)	(5)	(6)
	APPROVED ALLOCATIONS.					
Final Estimates of Cost	Approved C.O. 899 dated 13.7.27	Supplement C.O. 841 dated	Total	Actual Expenditure to 31st. Dec. 1931.	Expenditure from 1st. January to 31st March, 1932.	Required in 1932/33
Details of Expenditure.	Pounds : Pounds Egyptian : Palestine	21.10.30				Balance required to complete work.
£P.	£E. : £P.	£P.	£P.	£P. Mils.	£P. Mils.	£P. Mils. : £P. Mils.

138.102
51.069
196.271

181.952
14.450
211.402

~~643.446~~
~~643.446~~
32.000
117.640

72.681
19.412
92.093

~~457.028~~
800.028

17.821
358.231
376.052

Government of Palestine

87

Chief Secretary's Office,
Jerusalem,
Palestine.

No.A/153/31.

11
14 July, 1931.

To Director of Public Works,

83
I am directed to inquire whether a reply can now be sent to my letter

No. A/153/31 of the 9th June, 1931, on the subject

of Sir Ellis Kadoorie's Bequest.

CENTRAL REGISTRY
File No 319
15 JUL 1931
P.W.D.H.Q. JERUSALEM

10.2.

S. MOODY
for CHIEF SECRETARY

Where is the draft
which D.P.W. states he
corrected. 14/17/7

File
17.7.31.

see folio 86

11

2/1/2

NAME	Boy
AGE	
SEX	
DATE	
TIME	
PLACE	
REMARKS	

14th July 1931

Chief Secretary.
-----Subject : Administration of Sir Ellis
Kadoorie Bequest. 83Reference: Your A/153/31 dated 9-6-31.

I append reports on the works carried out by my department at both the Tulkarem and Mount Tabor Schools.

Agricultural School (Arab) Tulkarem.

1. The building scheme included the following :		Approx. cost LP.
(a) School building containing Flat for Headmaster Residential Quarters for Asst. masters, and 40 pupils with necessary domestic offices, class rooms laboratory etc.		11,800
(b) Farm house containing cow byres, mule stables, silo, offices, power house, workshops, stores etc.		6,900
(c) Dairy with installation of model dairy plant.		1,250
(d) Dutch barn		160
(e) Cattle dipping trough		350
(f) Fruit canning building with instal- lation of model canning and juice extracting plants.		850
(g) Poultry houses.		250
(h) Installation of pumping plant with pipe lines and reservoir.		2,300
(j) Installation of machinery for lighting and power with transmission and fittings.		2,000
(k) Fencing, roads etc.		356
		LP. 26,216

2. The site is immediately adjoining Tulkarem village and Railway Station. Cost of labour and transport were therefore reduced to the minimum.
3. All work has been carried out departmentally by direct labour (principally Arab) and is completed with the exception of
 - (a) Installation of machinery and appliances in Fruit Canning building. This work is held up pending arrival of balance of material now on indent with Crown Agents.
 - (b) Deepening of old well originally on site, to improve water supply and sundry small items desirable to properly finish off the works. The execution of these items is contingent upon the exact sum available after providing for £3(a) above and realisation of funds arising from disposal of surplus plant and material.
4. Financial position as at 30-6-31.

Total sum available for capital expenditure by P.W.D. (after making sundry inter-departmental re-allocations with Director of Agriculture).

LP.26,216

Amount actually spent or committed to date

26,112

Less estimated proceeds of disposal of surplus materials

223
25,889

Add provision for work specified in para £3(a) above

150 LP.26,039

Approx. balance in hand to complete works specified in para £3(b) above (which will suffice).

LP. 177

Agricultural School (Jewish) Mount Tabor.

1. The building scheme is practically a duplicate of that executed at Tulkarem, but the nature of the site is totally different and necessitated the revision of all plans to suit contours etc.
2. Electric current will eventually be available from the Palestine Electric Corporation's public supply but as power for pumping water for building purposes was an immediate necessity a diesel engine has been installed for the present.

3. A 12" bore-hole has been sunk to a depth of 30 metres and is giving a regular supply of excellent water of 15 cub. metres per hour.
4. The site being about 19 kilometres from Affula, the nearest railway station, and local labour being very scarce, the high charges for transport and labour (principally Jewish) will very considerably increase the normal cost. The sum at present available for capital expenditure by P.W.D. is LP.33,653.
5. The following works have been completed :
 - (a) Fencing in site.
 - (b) Formation of road to reach all farm buildings.
 - (c) Levelling sites for buildings.
 - (d) Borehole for water.
 - (e) Installation of temporary pumping plant to provide water for building purposes.

The following works are now in hand with direct labour :

- (a) Foundations for all farm buildings.
 - (b) Cattle dipping trough.
 - (c) Fresh water and irrigation water reservoirs.
6. Plans and specifications are completed for all buildings (except school, which are in sketch stage) with a view to obtaining tenders for the superstructures.
7. Financial position as at 30-6-31 :

Total sum at present available for P.W.D.	LP. 33,653
Amount actually spent or committed to date	<u>2,126</u>
Balance available to complete.	<u>LP. 31,527</u>

Sgd. R. HEDLEY
R.H.

DIRECTOR OF PUBLIC WORKS

Copy to 14/4/1.
14/7/1
14/7/16

3/9.

July 1, 1931.

Treasurer.

Subject:- Agricultural Schools -
Kadoorie Bequest.

Reference:- Your 454/4961 of
24-7-1929.


With reference to Mr. Harvey's request of this morning I forward herewith the statement called for in the above mentioned letter for the current calendar year in respect of the Kadoorie Tulkarm and Mt. Tabor Agricultural Schools.

(Sgd) FAWCETT PUDSEY

DIRECTOR OF PUBLIC WORKS.

4444.

Copy to 14/4/1
" " 14/7/1
" " 14/7/1/6

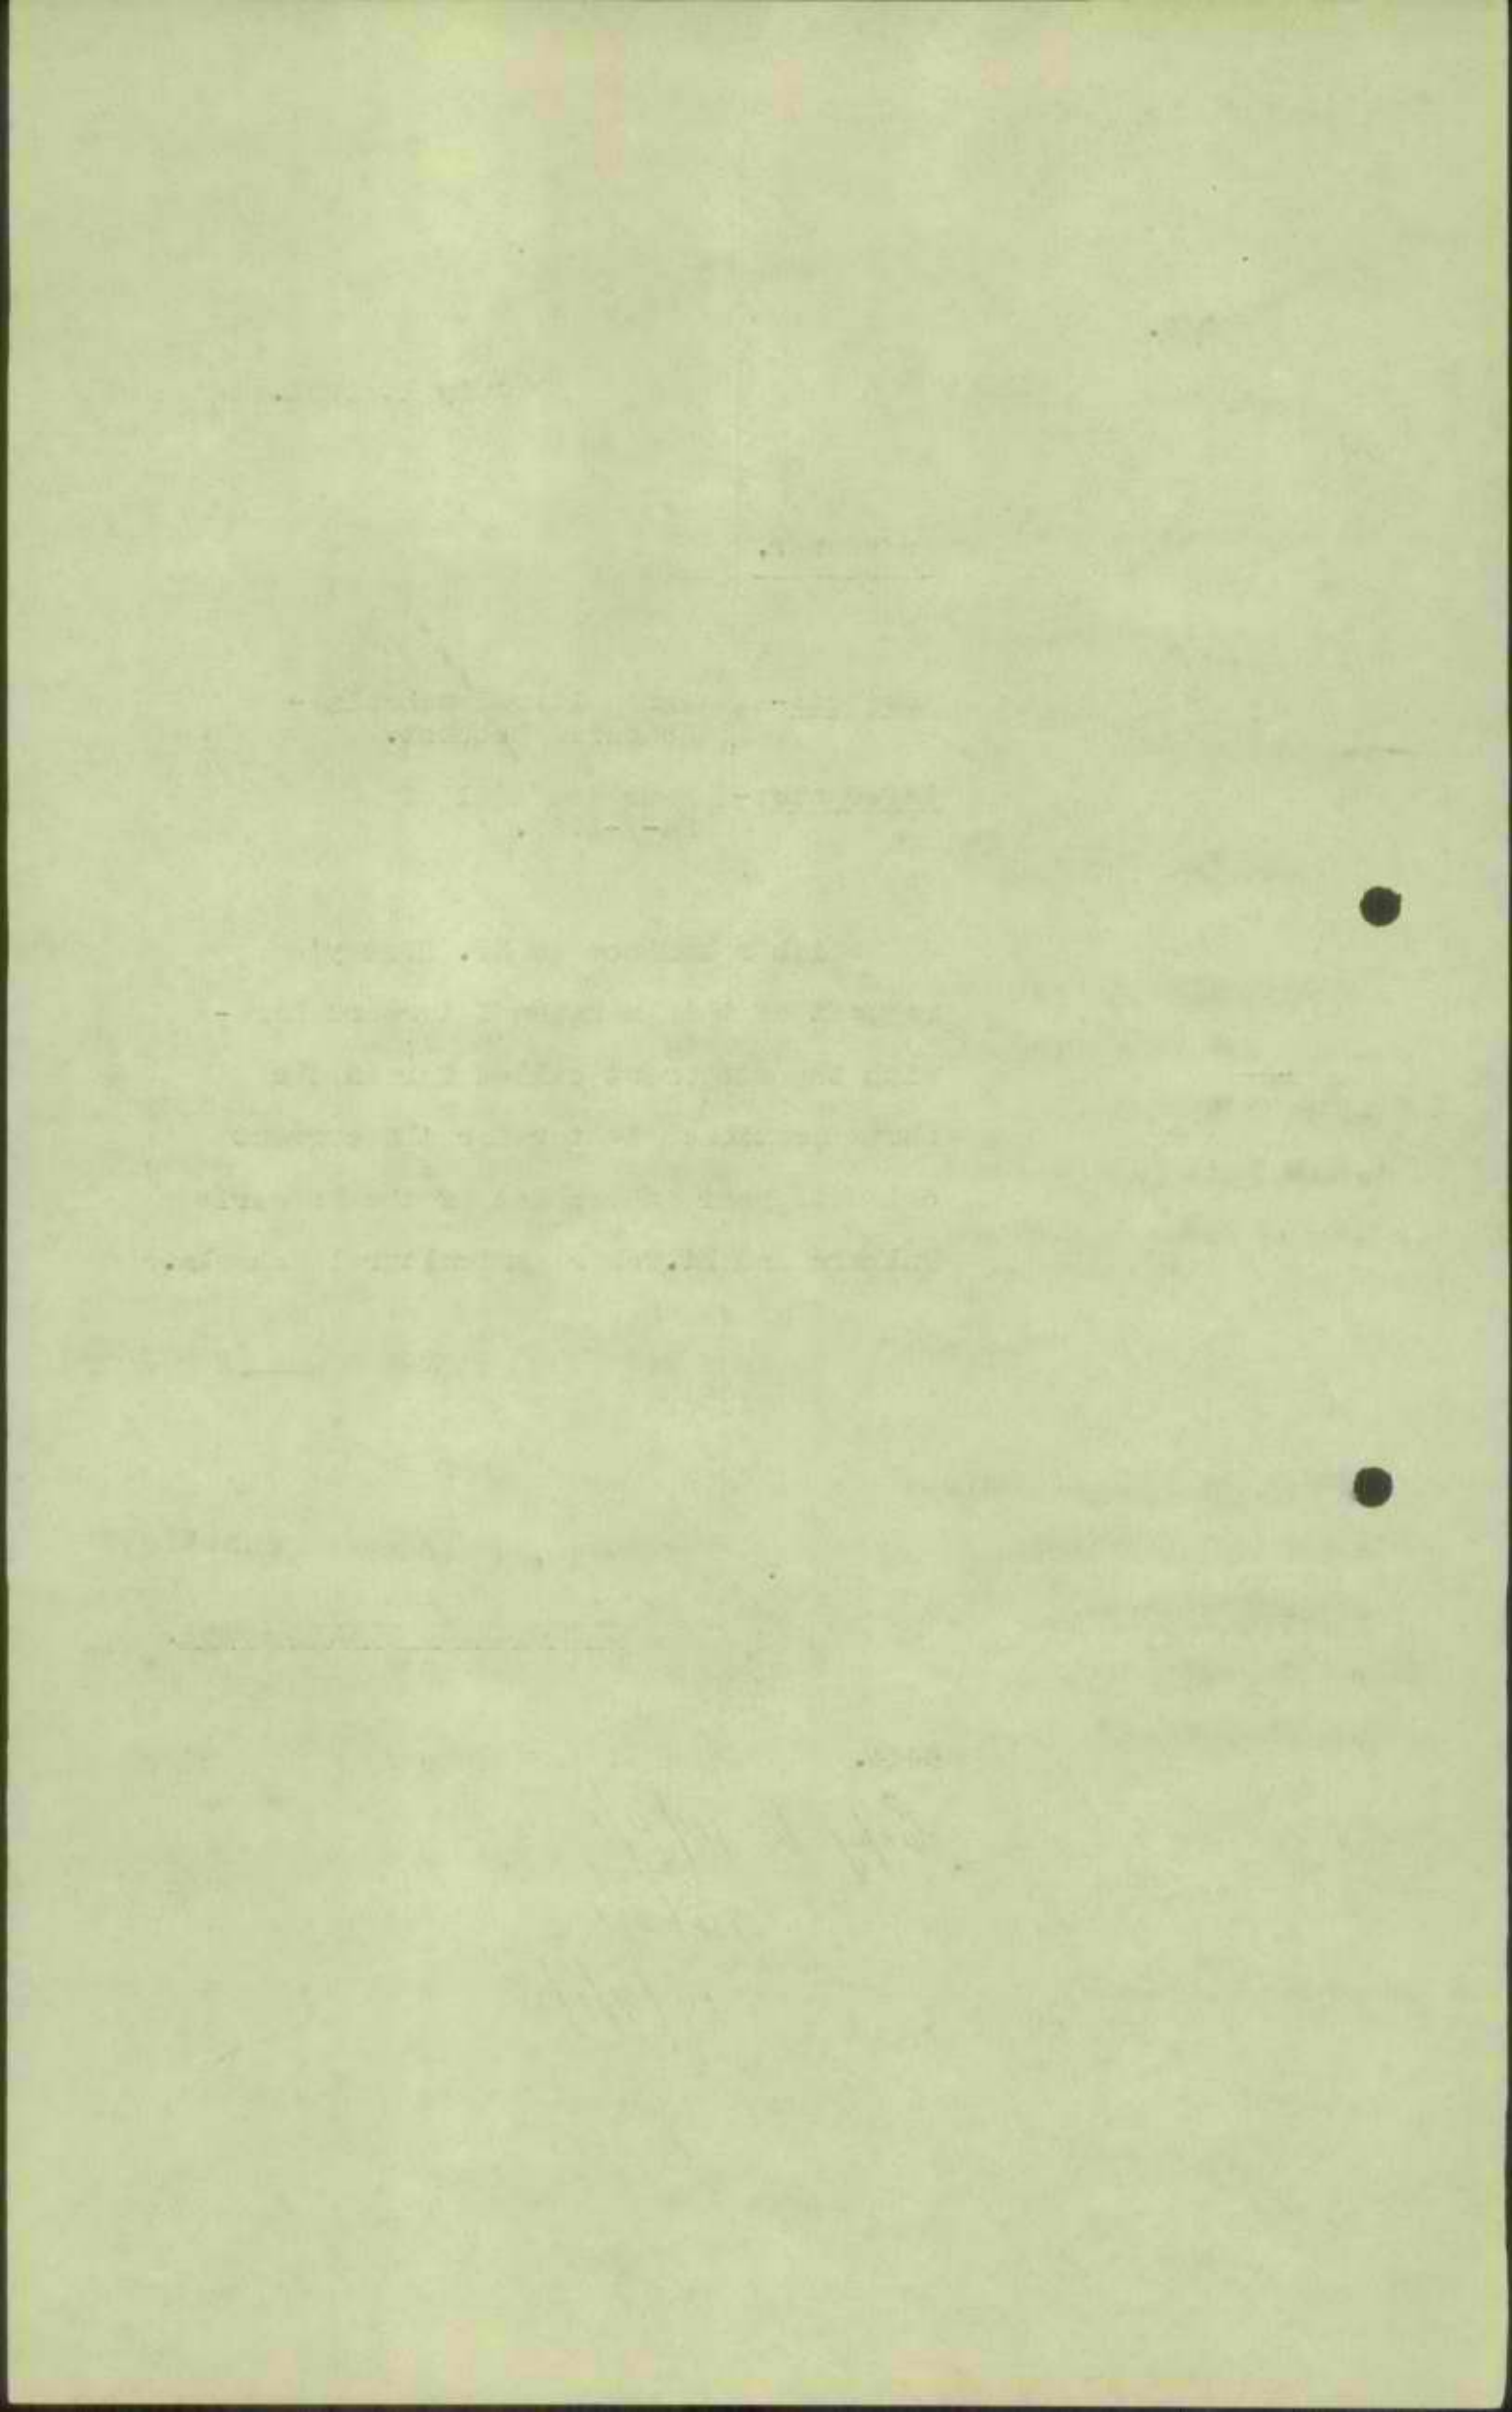

KADOORIE AGRICULTURAL SCHOOLS.

Head and Sub-Head	Expenditure : and commit- ment from 1-1-31 to 30-6-31. LP.Mils.	Estimated : expenditure : from 1-7-31 : to 31-12-31 : LP.Mils	TOTAL LP.Mils
<u>CAPITAL EXPENDITURE</u>			
<u>Agricultural School, Tulkarm</u>			
I. Land and Development	80.000	200.000	280.000
II. School Buildings	545.000	-	545.000
III. Farm Buildings	900.000	170.000	1,070.000
IV. Power Transmission and Lighting	220.000	30.000	250.000
TOTAL:	1,745.000	400.000	2,145.000
<u>Agricultural School, Mt. Tabor</u>			
I. Land and Development	250.000	3,000.000	3,250.000
II. School Buildings	-	-	-
III. Farm Buildings	50.000	5,700.000	5,750.000
IV. Power Transmission and Lighting	-	300.000	300.000
TOTAL:	300.000	9,000.000	9,300.000

1/7/31

Government of Palestine

In case of reply
please quote the
date of this letter
and the following

Ref. A/153/31.

Chief Secretary's Office,
Jerusalem,
Palestine.

9^Q
June, 1931.

15-
7-
3

The Treasurer.

Director of Public Works.

Director of Agriculture and Forests.

I am directed by the High Commissioner to request that you will furnish as soon as possible detailed reports on the administration of the Sir Ellis Kadoorie Bequest and of the work carried out by your Department with the funds of the Bequest.

The reports are required for the information of His Majesty's Government.

82 For guidance, I attach an extract from a recent report by the Treasurer on the Finances of the Palestine Government.

CENTRAL REGISTRY
File No. 3/9
10 JUN 1931
P.W.D.E.Q. JERUSALEM

V. Gadoorie
for CHIEF SECRETARY.

REPLIED 86

EX-153-31-87

11-11-11

Dear Sir,
I have the honor to acknowledge the receipt of your letter of the 11th inst. in relation to the above matter.
The same has been forwarded to the proper authorities for their consideration.
Very respectfully,
J. H. Smith

FILED IN 11-11-11
BY <i>[Signature]</i>
11-11-11
11-11-11
11-11-11

Extract from Report by Treasurer on the Finances
of the Palestine Government.

x x x

Sir Ellis Kadoorie Bequest. The bequest was made to His Majesty's Government who have appointed the Officer Administering the Government of Palestine to be their local representative for the administration of the trust.

The following is a summary of the receipts and disbursements effected through the accounts of the Government of Palestine :

Payments -	£P.	£P.	£P.
Tulkarem Agricultural School			
Capital Expenditure (Estimated £P.35,780)		30,286	
Recurrent Expenditure	3,790		
Less Sundry Receipts.	<u>317</u>	<u>2,472</u>	33,759
Mount Tabor Agricultural School.			
Capital Expenditure (Estimated £P.40,246)			<u>2,247</u>
			36,006
Receipts -			
Remittances from Crown Agents for purpose of the Trust			<u>31,084</u>
Balance due to the Government of Palestine.		£P. 4,922	=====

As the bequest was made to His Majesty's Government, investments and transactions otherwise relating to the trust fund are not recorded in the accounts of the Government of Palestine. Particulars of the trust fund and the investments held by the Crown Agents at the 31st December, 1930, are however appended :-

(a) Receipts and Payments by Crown Agents.

Receipts:

Bequest -	£P.	£P.
Received in various sums during the year 1924	121,439	
Received in the year 1928	<u>112</u>	121,551
Interest (since the year 1924)	38,866	
Less Crown Agents' Commission	343	<u>38,523</u>
		160,074
Transfers to meet expenditure incurred locally		<u>31,084</u>
		£P.128,990

(b) Investments by Crown Agents :-

Cash lent to Joint Colonial Fund	65,900
Invested in various Trustee Securities	63,000
Balance held by Crown Agents	<u>90</u>
	£P.128,990.
	=====

34/27.

May 5th, 1931.

Treasurer.

Subject ; Audit Query No. 388 (130)
B/1930 dated 20-3-31,
attached.

Reference: Your Y/16/182 of 22-4-31.

80
The statement made by the Engineer in charge, Nazareth District in his letter No. 8/2/6 of 3-4-1931, copy enclosed with the Audit Query is not correct and the Engineer in charge is being advised accordingly.

2. The construction of the Kadoorie Agricultural Schools at both Tulkarem and Mount Tabor is treated as a Government service and the procedure with regard to departmental charges followed on Public Works Extraordinary services is applied in the case of these two buildings.

Charges such as travelling allowances and railway fares of officers employed on these buildings or Headquarters officers inspecting same, telephone calls, etc., are met from the relevant votes under the head "Public Works Department - 'B' Other Charges". Further, similarly to issues made for Public Works Extraordinary works no departmental expenses are charged in respect of unallocated stores issued for Kadoorie Schools.

3. The Audit Query is herewith returned.

(S.S.) PAWORTH PUBSEY

DIRECTOR OF PUBLIC WORKS

Copy to Engineer in charge
Nazareth District, for information
and guidance.

4. " " : 3/9

8/2/6.

April 3rd, 1931.

Sub Accountant,
Nazareth.

Subject : Audit Query 388(130)B/1930 of
20-3-31 (attached)
Reference: Your 10/24 of 2-4-1931.

Yes, the charge should have been met from
Kadoorie Bequest Deposit Account. This will be
adopted in all future cases.

Audit Query is enclosed.

sgd. A. Toukan
ENGINEER IN CHARGE
NAZARETH DISTRICT

Audit Query No. 388(130)B/1930
of 30-3-31.

P.V.44 - March 1930 - Nazareth -
LP.5.400 mils - Head XXII - Public Works
Department - Item 77 - Transport and
Travelling.

Should not the amount of 300 mils
paid to Mr. Wildman in respect of
travelling allowance for the day during
which he inspected the works at the
Agricultural School, Mt. Tabor, be a
charge against the Kadoorie Bequest
Deposit account instead of Head XXII,
Public Works Department, Item 77 - Transport
and Travelling ?

sgd. J. Homa

AUDITOR

14/4/1

August 12th, 1930.

Chief Secretary.

Subject : Tulkarem Agricultural
School.

I shall be glad to be informed if this Department will be required to carry out, from its recurrent votes, works maintenance services for the above school which was constructed from funds of the Kadoorie Bequest.

If you reply is in the affirmative necessary provision will have to be made in the 1931 Estimates under the following subheads :

Maintenance of Water and Electric Light Plant.

Maintenance of Buildings.

Minor Works.

Water Supply and Conservancy.

Maintenance of Furniture.

Signed J. F. ROWLANDS


Actg. DIRECTOR OF PUBLIC WORKS

Copy to Director of Agriculture & Forests

4. " " 3/9 ✓
24/44

ALKAREM AGRICULTURAL SCHOOL

Head and Subhead	Approved:			Actual Expenditure to			Commitments at 31-3-30			Availa- ble Balance	Revised Estimate	Balance required
	Estimate:	Eng. ic	P.D. HQ.	Eng. ic	P.D. HQ.	Total	Eng. i.c.	P.D. HQ.	Total			
A. Capital Expenditure												
I. Land Development												
a. Water Supply	2800.-	73.605	858.116	931.721			200.-	103.-	303.-	1565.279	2800.-	1565.279
b. Fencing	350.-	295.094	56.537	351.631			45.-	-	15.-	16.631	385.-	51.631
II. School Building	9500.-	5059.728	108.386	5168.114			1500.-	424.-	1924.-	2407.886	10296.-	3203.886
III. Barn Building	10720.-	6654.357	1201.978	7856.335			200.-	15.-	215.-	2648.665	11646.-	3074.665
IV. Power Station and Transmission	1590.-	74.681	742.557	817.238			100.-	337.-	437.-	335.762	1590.-	335.762

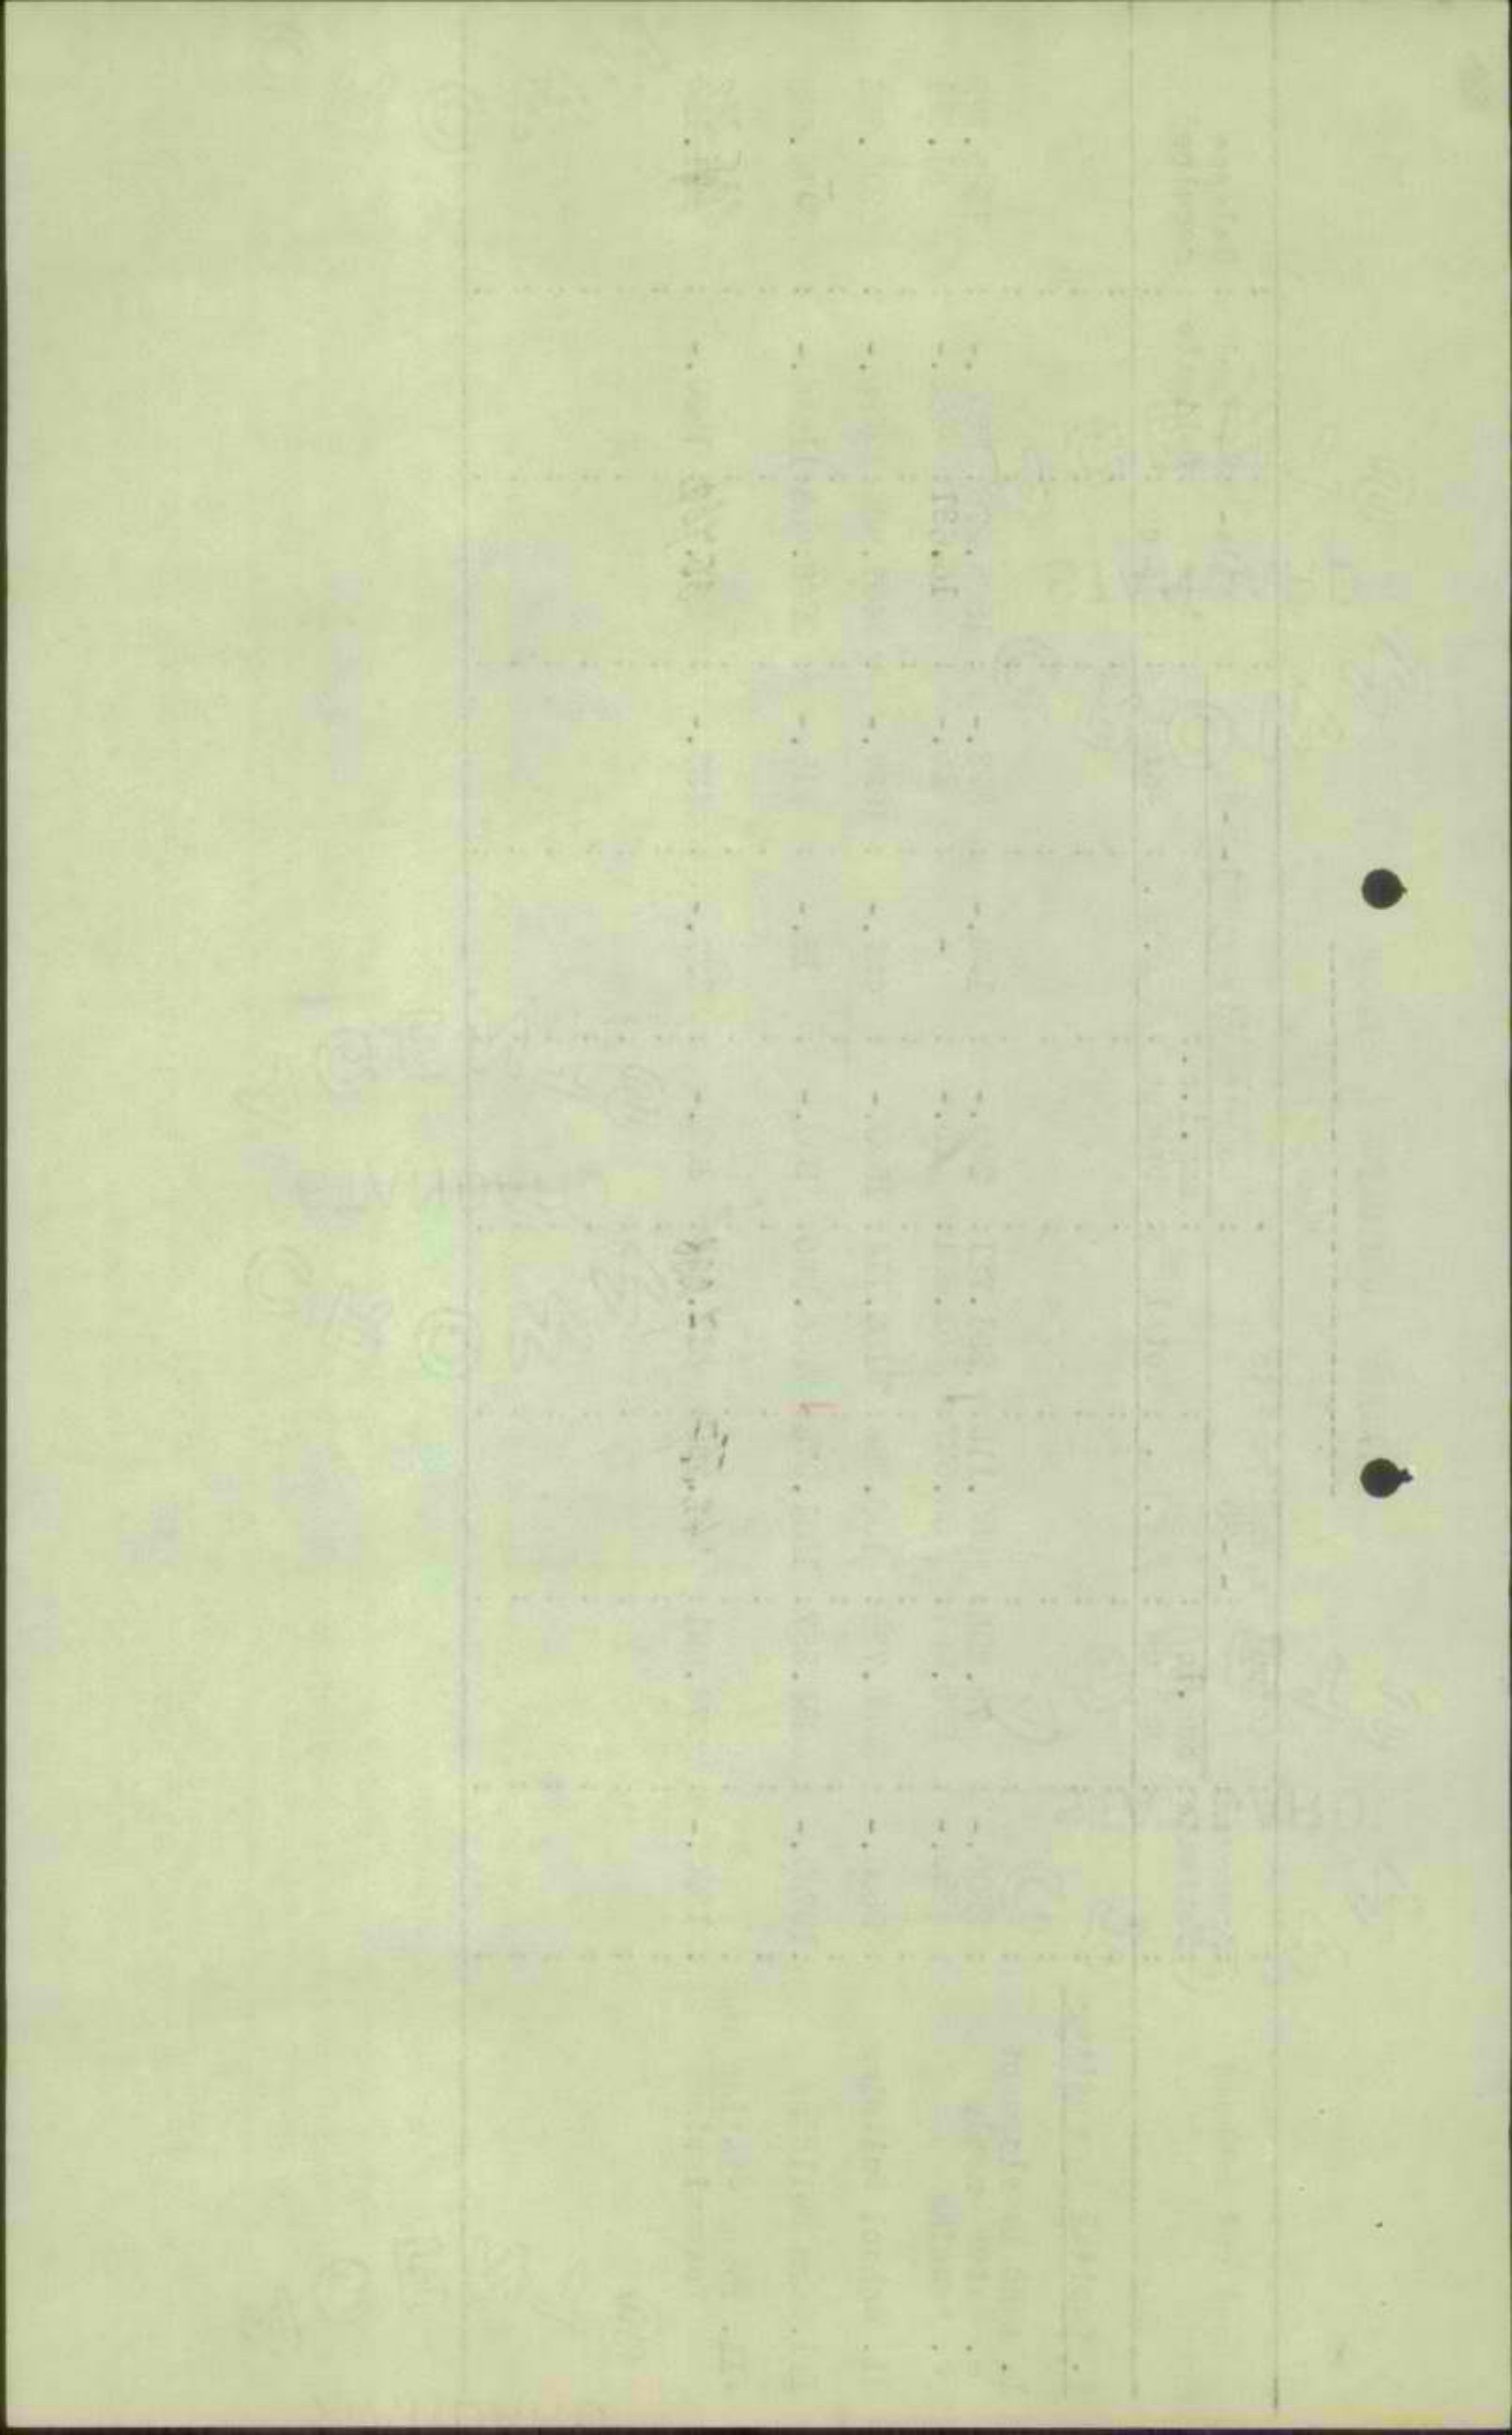

MT. TABOR AGRICULTURAL SCHOOL

Head and Subhead	Approved Estimate	Approved Expenditure to 31-3-30			Commitments at 31-3-30			Available Balance	Revised Estimate	Balance required
		Eng. i. c. Nablus	P. & D. Hq.	Total	Eng. i. c. Nablus	P. & D. Hq.	Total			
<u>A. CAPITAL EXPENDITURE</u>										
I. Land Development	5731.-	573.795	19.450	593.245	354.585	-	354.585	4783.170	7231.-	6283.170
II. School Buildings	12528.-	-	-	-	-	-	-	12528.-	13674.-	13674.-
III. Farm Buildings	11270.-	-	-	-	-	-	-	11270.-	11640.-	11640.-
I. Electric Lighting and Power	688.-	-	-	-	-	-	-	688.-	1138.-	1138.-

33623

30217

76a

3/9.

July 16th, 1930.

Treasury.

Subject : Kadorrie Agricultural ⁶⁴
Schools
Reference: Your 454/3780 of 27-5-30.

Please find attached the statements
requested in your letter as above.

Actg. DIRECTOR OF PUBLIC WORKS

COPY

454/4569.

THE TREASURY
JERUSALEM.

7th July 1930.

Director of Public Works.

Subject:- Kadoorie Agricultural
School Account. 412.14/7/1 N°2

Reference:- Your No.14/7/1 of
4-7-30.

I have to inform you that at the
end of 1929 the Kadoorie Bequest account
was closed with a credit balance which
has transferred the account from advances
to Deposits.

Original in 14/7/1

Copy for 3/9

Signed:
ACTING TREASURER.

Ref No. B/114/3/E

PUBLIC WORKS DEPARTMENT
NABLUS DISTRICT

NABLUS, June 26th. 1930

Director of Public Works
Jerusalem

72

Ba

Subject: Tulkarm Agricultural School
Reference: Your 3/9 of 25.6.30.

Before submitting the statement returned with your above I was informed by Mr. Melamed that a definition of "commitments" was roughly:- Unpaid expenditure incurred or of necessity about to be incurred in order to complete a work already in hand, or which was bound to be put in hand and completed.

This definition was accepted and as the work detailed between Hqrs. and Nablus was not strictly definable I was compelled to bracket the joint commitments.

From your above however, it is assumed that the information required is, what was the approximate actual expenditure incurred but unpaid at 31.3.30. and same is now given.

It would be as well if an official definition of "commitments" might be made, as the exact meaning of this word is often cropping up in matters relative to the usual monthly statements.



Philip L...
ENGINEER IN CHARGE
NABLUS DISTRICT

PPT/EA

STANDARD

1937

STANDARD
1937

Wray

	Actual Exp. Nabius 31.3.30.	Probable Exp. Paid by Hqrs.	Approximate Commitments by Nabius on 31.3.30.	Available Balances
<u>A. Capital Exp.</u>				
I. Land & Development				
3. Water Supply	73.605	1088.000	200.000	
C5. Fencing	295.094	56.537	15.000	To be completed by Hqrs.
II. School Building	5059.728	620.964	1500.000	
III. Farm Buildings	6654.357	1202.357	200.000	
VII. Power Station & Transmission	74.681	653.000	100.000	Nil

Michael Dwyer
ENGINEER IN CHARGE
NABBUS DISTRICT

Typist
separate statements
for Tulkarem and
Mt. Tabor schools

File


Tulkarem Agricultural School

Head & Subhead	Approved Estimate	Actual Expenditures to 31.3.30	Expenditures at 31.3.30	Available Balance	Revised Estimate	Balance Required	Remarks
<u>A. Capital Expenditure</u>							
I. Land & Development	250. -	73605	931721	200. -	303. -	1565279	
a. Water Supply	2800	1148645 858116	1999721 351631	1641764 103. -	1744764 15. -	944485	2800
b. Fencing	350	351551 56537	408168 15000	-	15. -	73168	385
II. School Building	9500. -	5059738 5675404	5168114 5783820	1500. - 424. -	1924. - 4448566	2407.886	10296
III. Farm Building	10720. -	6654357 1201978	7856335 7058692	200. - 15. -	215. - 742495	2648665	868860
IV. Power Station & Transmission	1590. -	74681 895	811866 1632185	100. - 644451	437. - 103145	241134	1590
	24960	12157465	2962202	1511966	2015. -	6946333	

Mt. Tabor Agricultural School

<u>A. Capital Expenditure</u>							
I. Land & Development	5,731. -	573795	19450	593245	354585	354585	4783170
II. School Buildings	12,528. -	-	-	-	-	12,528. -	13,674. -
III. Farm Buildings	11,270. -	-	-	-	-	11,270. -	11,640. -
IV. Electric lighting & Power	688. -	-	-	-	-	688. -	1138. -

Tulkarem
Agricultural School



3/9

June 25th, 1930.

Engineer in Charge,
Nablu District

71

Subject : Tulkarem Agricultural
School.

Reference: Your B/114/S/E of
June 21st, 1930.

I have to request you to give
in the column of commitments the
figures of the commitments made by
your office only. The H.Q. commit-
ments will be shown from this end.

Statement is herewith returned?

DIRECTOR OF PUBLIC WORKS

222.

REPLIED 74

Ref. No. B/114/3/E

PUBLIC WORKS DEPARTMENT
NABLUS DISTRICT

NABLUS, June 21st. 1930

Director of Public Works
Jerusalem

10

A.D.P.W.
Dr

Subject: Tulharem Agricultural School
Reference: My B/114/3/E of 16.6.30.

I resubmit amended statement with expenditure column for Nablus District Expenditure only. For your guidance I have inserted an additional column showing approximate expenditure that I anticipate will be made direct by your office and by adding the first and second columns.

I have calculated the approximate commitments and credit or debit balance.

The balance on Head III is due to :-

3 f :-	Saving of SP.1360.000
3 h :-	Saving of SP 40.000
3 j :-	Cancelling of work SP 300.000
3 b :-	Work not commenced SP 300.000
	<u>SP. 2000.000</u>

The last item 3 b might be considered as a commitment and this is left to your consideration and decision please, the only figures I give with certainty being the actual expenditure on each head, the other columns being amended in your office to coincide with your records.



Sheep P. L.
ENGINEER IN CHARGE
NABLUS DISTRICT

PPT/EA

REPLIED

72

Ref No.B/114/3/E.

PUBLIC WORKS DEPARTMENT
NABLUS DISTRICT
NABLUS, June 16th.1930.Director of Public Works,
Jerusalem.
-----*Boa 114*
an
*65*Subject:-Kadoorie Agricultural
School.Reference:-Your 3/9 of 4.6.30.
+ of 15.6.30Herewith statement of actual
expenditure up to 31/3/30.

CENTRAL REGISTRY
File # <i>3/9</i>
18 JUN. 1930
A.V.D.M.Q. JERUSALEM

Alfred L...
ENGINEER IN CHARGE
NABLUS DISTRICT

PPT/AK

REFERRED TO 71

STANDARD

100

AGRICULTURAL SCHOOL, TULJAPUR - KADDOORIE BEQUEST

Statement showing actual expenditure to 31st March, 1930, and commitments and available balances by Department of Public Works.

Head and Sub-Head	Actual Expenditure to 31-3-30	Commitment	Available Balances
	LP. Mils	LP. Mils	LP. Mils
<u>A. Capital Expenditure</u>			
1. <u>Land and Development.</u>			
3. Water supply	1141.605	1641.764)	Nil
● Fencing	351.631	15.000))	
11. <u>School Buildings.</u>	5675.434	3724.566	"
111. <u>Farm Buildings.</u>	7856.714	777.445	2085.841
VII. <u>Power Station and Transmission-</u>	895.	694.451	Nil
<u>Funds re-allocated from Director of Agric. School</u>			
3a. Dairy Plant Erection	32.081	47.919	"
● Platform for Tanks	-	5.000	"
1a. Culverts	33.194	16.806	"

1. The first part of the report is a general statement of the purpose and scope of the study. It is followed by a brief review of the literature on the subject.

I. Introduction	II. Literature Review	III. Methodology
A. Purpose and Scope	B. Review of Literature	C. Description of Methods
D. Statement of Hypotheses	E. Summary of Findings	F. Discussion of Results
G. Conclusion	H. Recommendations	I. References
J. Appendix A	K. Appendix B	L. Appendix C
M. Appendix D	N. Appendix E	O. Appendix F
P. Appendix G	Q. Appendix H	R. Appendix I

No. 3/9

Government of Palestine
Public Works Department
Jerusalem

15th June 1930

65
Subject : Kadoorie Agricultural Schools.

Reference : 3/9 dated 4-6-30

The Director of Public Works presents his compliments
to Engineer in charge Nablus District
and requests that a reply may be sent to his communication under
reference.

REPLIED

70

Director of Investigation
Federal Bureau of Investigation
Washington

June 1941

Subject: Alvin Karpis

Reference: NY 62-103-1

The Director of Public Works presents his compliments
to _____
and requests that a reply may be sent to his communication under
reference.

Ref.No. 1/9/12.


PUBLIC WORKS DEPARTMENT
NAZARETH DISTRICT
Nazareth June 6th, 1930.

Director of Public Works
Jerusalem.

Ba
Am
65

Subject:- Kadoorie Agricultural Schools.
Reference:- Your 3/9 of 4.3.1930.

Herewith.



J.

A. Toukan
ENGINEER IN CHARGE
NAZARETH DISTRICT

UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
Washington, D.C. 20250

MAIL ROOM

Director of Public Works
Washington, D.C.

Subject: National Agricultural Schools
Reference: Your letter of 1/1/50

Enclosed

RECEIVED BY CHIEF
MAIL ROOM

[Handwritten signature]

MOUNT TABOR AGRICULTURAL SCHOOL & KADOCRIE BEQUEST

Statement showing actual expenditure to 31st
March 1930, and commitments and available
balances by Department of Public Works.

Head and Sub-Head	Actual Expenditure at 31.3.30	Commitments	Available Balances <i>on FA 396 of 26-7-29</i> <i>7 FA 62 of 3-2-30</i>
	LP.mils	LP.mils	LP.mils
<u>CAPITAL EXPENDITURE</u>			
I. <u>Land and Development</u>			
Items 2 - 8 <i>Benings Rd</i>	573.795 ✓ <i>19.450</i>	354.585	926.205 .
II. <u>School Buildings -</u>	Nil	Nil	Nil
III. <u>Farm Buildings -</u>	Nil	Nil	Nil
VII. <u>Electric Lighting and Power.</u>	Nil	Nil	Nil

Ch. Toulson
ENGINEER IN CHARGE
NAZARETH DISTRICT
6.6.30

6.6.30.

J.

THE UNITED STATES OF AMERICA

OFFICE OF THE SECRETARY OF THE ARMY
WASHINGTON, D. C.

NAME	RANK	COMPONENT	DUTY STATION
J. Edgar Hoover	Director	Department of Justice	Washington, D. C.
J. Edgar Hoover	Director	Department of Justice	Washington, D. C.
J. Edgar Hoover	Director	Department of Justice	Washington, D. C.
J. Edgar Hoover	Director	Department of Justice	Washington, D. C.
J. Edgar Hoover	Director	Department of Justice	Washington, D. C.
J. Edgar Hoover	Director	Department of Justice	Washington, D. C.
J. Edgar Hoover	Director	Department of Justice	Washington, D. C.
J. Edgar Hoover	Director	Department of Justice	Washington, D. C.
J. Edgar Hoover	Director	Department of Justice	Washington, D. C.
J. Edgar Hoover	Director	Department of Justice	Washington, D. C.
J. Edgar Hoover	Director	Department of Justice	Washington, D. C.

GOVERNMENT OF PALESTINE
PUBLIC WORKS DEPARTMENT,
JERUSALEM.No. 3/9

Reference to previous correspondence:

June 4th, 1930.

No. _____

The Director of Public Works presents his compliments
to Engineer in Charge, Nablus, Nazareth ~~REPLIED 70~~ ~~REPLIED 67~~
and encloses the undermentioned documents for early compliance and return.

Subject: Kadoorie Agricultural Schools

16145-13000-5/23-1 EL P.

Date	Description
27.5.30	Copy of letter 454/3780 of 27.5.30 from Treasurer.

64

RECEIVED BY THE
 PUBLIC WORKS
 DEPARTMENT

THE CITY OF NEW YORK

THE DEPARTMENT OF PUBLIC WORKS

THE DEPARTMENT OF PUBLIC WORKS

THE DEPARTMENT OF PUBLIC WORKS

THE DEPARTMENT OF PUBLIC WORKS

THE DEPARTMENT OF PUBLIC WORKS

THE DEPARTMENT OF PUBLIC WORKS

THE DEPARTMENT OF PUBLIC WORKS

64

Tel. Address: TREASURY, JERUSALEM
Tel. No.: Jerusalem 85

In your reply please quote

No.

454/3780

THE TREASURY,
JERUSALEM.

27th May, 1930.

Director,
Department of Public Works.

Mr. Canger *28/5/30*

A. D. L. W.

Subject: Kadoorie Agricultural Schools.

A. B. K.
with

I shall be obliged if you will

complete the attached statement showing the
actual expenditure to the 31st March last
the commitments and the available balance
in respect of the items of the estimates
of the Tulkarem and Mount Tabor Schools.

2. This information is urgently required
in connection with the submission of
supplementary estimates to the Secretary
of State.

CENTRAL REGISTRY
File No. <i>3/9</i>
28 MAY 1930
P. W. D. H. Q. JERUSALEM

W. H. H. H. H.

ACTING TREASURER.

Dealt With
REPLIED

165
77

TB.

MOUNT TABOR AGRICULTURAL SCHOOL - KADOORIE BEQUEST

Statement showing actual expenditure to 31st March, 1930, and commitments and available balances by Department of Public Works.

Head and Sub-Head	Actual Expenditure at 31-3-30 LP.Mils	Commitments LP.Mils	Available Balances LP.Mils
<u>CAPITAL EXPENDITURE</u>			
I. <u>Land and Development</u> - Items 2 - 8			
II. <u>School Buildings</u> -			
III. <u>Farm Buildings</u> -			
VII. <u>Electric Lighting and Power.</u>			

STATE OF NEW YORK
IN SENATE
January 10, 1911.

SOURCES OF INFORMATION	REMARKS	COMMISSIONER'S REPORT	REMARKS
1. <u>General Information</u>			
2. <u>Particulars of Cases</u>			
3. <u>Summary of Results</u>			
4. <u>Conclusions and Recommendations</u>			
5. <u>Appendix</u>			
6. <u>Index</u>			
7. <u>Tables</u>			
8. <u>Maps</u>			
9. <u>Other Documents</u>			

AGRICULTURAL SCHOOL, TULKAREM - KADOORIE BEQUEST.

Statement showing actual expenditure to 31st March,
1930, and commitments and available balances by
Department of Public Works.

Head and Sub-Head	Actual Expenditure to 31.3.30 .	Commitments	Available Balances
	£P. mils	£P. mils	£P. mils
A. <u>Capital Expenditure</u>			
1. <u>Land and Development</u> -			
3. Water Supply			
5. Fencing			
II. <u>School Buildings</u> -			
III. <u>Farm Buildings</u> -			
VI. <u>Power Station and Transmission</u> -			

62

Tel. Address: TREASURY, JERUSALEM
Tel. No.: Jerusalem 85

THE TREASURY,
JERUSALEM.

In your reply please quote

No.

486/7801

November
18 October, 1929.

Director,
Public Works Department.

PM

Subject : Advance - Sir E.
Kadoorie Bequest.

I enclose a reconciliation
statement in respect of the above
mentioned account as at 31st July,
1929, for necessary action.

CENTRAL REGISTRY
File No. 34
29 NOV. 1929
P. W. D. H. Q. JERUSALEM

M. M.
for TREASURER.

AS.



DATE	10/10/1971
TIME	10:10
BY	[Signature]
REMARKS	
INITIALS	
SIGNATURE	

Treasury Books.

LP. Mils

Treasury expenditure as per ledger at 31.7.29 (P.W.D.).

6,542.077

Add : P.Vs. appearing in P.W.D.Books, but not in Treasury Books as under :-

P.W.D. No.	Amount LP.Mils
NA.298	22.502
NA.513(Part)(G.344)	-.135
NA.754	3.500
NA.755	11.000
NA.805	5.000
NA.807	2.200
NA.824	2.159
NA.825	20.920
NA.826	83.538
NA.827	1.350
NA.828	4.300
NA.832	28.350
NA.835	3.605

188.559

6,730.636

Less: Adjustment effected by Treasury in August, 1929, in respect of D.N.42, June, 1929, C.A.P.V.No.122 (P.W.D.10061).

1.389

6,729.247

Public Works Department Books.

Expenditure as per Vote Book P.W.D. to 31.7.29
(Agricultural School Tulkarem)
(Mount Tabor Agricultural School)

6,694.978

19.450

6,714.428

Add : Charges appearing in Treasury Books, but not in P.W.D.Books as under :-

Tr. No.	P.W.D. No.	Rly.Bill No.	Amount LP.Mils.
T.V.1 of Jan.1929	8724	G.1333	3.205
do	8726	G.1348	3.130
do (Part)	8723	G.1362	-.200
T.V.23 of March 1929	8743	G.1374	3.215
T.V.37 of May, 1929	9346	G.1462	-.505

10.255

Add : Charges appearing in P.W.D.Books in August, 1929, as under :-

	P.W.D. No.	Amount LP.Mils
C.A.P.V.3,16,122,153,247 and 285(June)	10061	4.726
do 193 (July)	10270	-.038

4.764

6,729.447

Less : Credit in respect of voucher No.NA.381 which does not appear in P.W.D.Books.

-.200

LP.

6,729.247

3/9.

August 12, 1929.

Treasury.

57

Subject:- Kadoorie Agricultural
Schools.

Reference:- Your 454/4961 of 24-7-29.

I forward the statement of actual
expenditure to 31-5-29 and estimated
expenditure to 31-12-29 as far as
can be foreseen at this stage of the
work, for your information as requested.

Signed A. F. ROWLANDS
FOR
DIRECTOR OF PUBLIC WORKS.

August 12, 1934.

Friend,

Enclosed please find
\$20.00.

Very truly yours,
- 1000 -

For the purpose of making
a contribution to the
expenses of the
and the purpose of the
and, for the purpose of the

Very truly yours,

Director of Public Works

AGRICULTURAL SCHOOL, TULKAREM - KADOORIE BEQUEST

Statement showing actual expenditure to 31st May, 1929,
and estimated expenditure from 1st June, 1929, to 31st
December, 1929, by Department of Public Works.

Head and Sub-Head	: Actual Ex- penditure to 31-5-29.	: Estimated Expenditure from 1-6-29 to 31.12.29:	: Total.
	: LP.Mils	: LP.Mils.	: Lp.Mils.
A. <u>Capital Expenditure</u>	:	:	:
I. <u>Land and Development</u>	: 410.477	: 2100.---	: 2510.477
II. <u>School Buildings</u>	: -	: 4016.021	: 4016.021
III. <u>Farm Buildings</u>	: 4873.502	: 5100.---	: 9973.502
VII. <u>Power Station and Transmission</u>	: -	: 1000.---	: 1000.---
Total:	: 5283.979	: 12216.021	: 17500.000

PALESTINE GOVERNMENT

1928-29

AGRICULTURAL SCHOOL, TUNISIA - MINISTRY OF AGRICULTURE

Statement showing actual expenditures to 31st Dec 1953, and estimated expenditures from 1st Jan 1954, to 31st December, 1954, by Department of Public Works.

Head and Sub-head		Actual Ex-	Estimated
		penses to:	penditures:
		31-12-53	31-12-54
		to 31.12.53	to 31.12.54
A. Capital Expenditure		12.411	12.411
I. Land and Development		410.477	2100.---
II. School Buildings		4016.081	4016.081
III. Farm Buildings		9278.302	5100.---
VII. Power Station and Transmission		---	1000.---
Total:		17503.860	12416.091

PALESTINE GOVERNMENT
1953-54

MOUNT TABOR AGRICULTURAL SCHOOL - KADOORIE BEQUEST

Statement showing actual expenditure to 31st May, 1929, and estimated expenditure from 1st June, 1929, to 31st December, 1929, by Department of Public Works.

Head and Sub-Head	:Actual :Expenditure :at 31.5.29:	:Estimated :Expenditure :from 1-6-29: :to 31.12.29:	Total
<u>CAPITAL EXPENDITURE</u>			
<u>Land and Development</u>			
Items 2 - 8	19.450	2000.---	
II. <u>School Buildings</u>			
III. <u>Farm Buildings</u>		1000.---	
VII. <u>Electric Lighting and Power</u>		2000.---	

PALESTINE GOVERNMENT

1928-29

MOUNT Tabor Agricultural School - Financial Statement

Statement showing actual expenditures to date, 1938, and estimated expenditures from July 1, 1938, to date, December, 1938, by Department of Public Works.

Actual	Estimated	Total
19,450.00	200.00	19,650.00

CAPITAL EXPENDITURE

Land and Development

- I. School Buildings
- II. Farm Buildings
- III. Electric Light and Power

PALESTINE GOVERNMENT

1938-39

Tel. Address: TREASURY, JERUSALEM
Tel. No.: Jerusalem 85

58⁹
THE TREASURY,
JERUSALEM.

In your reply please quote

No. 486/5060


29th July, 1929.

Director,
Department of Public Works.

L.P.W. 74.
55
Subject : Kadoorie School - Tulkarem.

Reference: Your 3/9 of 28.6.29 addressed
to the Director of Agriculture.

I agree that there is no necessity
for the accounting by you to the Director
of Agriculture of expenditure incurred from
the funds of the Kadoorie School under your
control, but it would be helpful to the
Director of Agriculture if you could supply
him with periodical statements under main
heads of the total expenditure thus incurred.



M. H. H. H.
ACTING TREASURER.

GOL.

Tel. Address: TREASURY, JERUSALEM
Tel. No.: Jerusalem 85

THE TREASURY,
JERUSALEM.

In your reply please quote
No. 434/4861

14 July, 1929.

Director,
" Department of Public Works;
" " Agriculture;
" " Lands.

*A
cc*

Subject: Kadoorie Agricultural Schools.

File

I shall be obliged if you will complete
the attached statement, showing the actual
expenditure to the 31st May last and estimated
expenditure to the 31st December next on account
of the Tulkarem and Mount Tabor Schools.

[Signature]

SK
Pl. state actual
expenditure, under
different items, up
to 31.5.29.
[Signature]
25/7.

2. I require this information for submission
to the Crown Agents for the Colonies in order to
obtain a remittance of funds to meet local
expenditure.

CENTRAL REGISTRY
3/9
25 JUL 1929
P.W.D.H.Q. JERUSALEM

[Signature]

ACTING TREASURER.

REPLIED 60.85

AGH.

[illegible]

TULKAREM AGRICULTURAL SCHOOL

	I Land and Development	II School Buildings	III Farm Buildings	VII Power Station Transmission
Financial Allocations issued	FA.87 LP.275	FA.359 LP.1000	FA.36 LP. 60	FA.294 LP.720
	281 296	363 " 500	" 40 " 65	" 280 " 1612
	301 100		" 63 " 325	
	302x 59		" 71y " 100	
	402x LP.97.4		" 73 " 1200	
	436		" 104 " 2000	
			" 106 " 110	
			" 267x " 1153	
			" 270 " 15	
			" 278x " 150	
			" 330 " 1000	
			" 400x " 2000	
			" 402x " 71	
			" 449x " 41	
			" 489x " 82	
Total	LP.827.436	LP.1500	LP.8372	LP.1332

<u>1928</u>	<u>EXPENDITURE</u>	
January	97.218	
February		
March		
April	100.-	4.200
May	50.-	
June	67.490	1.255
July		3.-
August		
September		0.900
October	37.399	
November		156.885
December	57.075	2150.947
1929		
January		
February		496.953
March		218.962
April	0.295	620.593
May	1.-	659.487
June		) 560.320
		(801.670
Total LP.	410.477	5675.172

X FAs issued in 1928

Original of
covering letter
in 14/4/11

3/9

28th June 1929

Director of Agriculture.

54
Subject : Kadoorie Schools -
Tulkarem.

Reference: Your 16/5/J.15/1/A
dated 26-6-29.

The amount set aside for the construction of the buildings in the approved schedule is under my control and is dealt with by this department similarly to an item of Public Works Extraordinary. F.R. 55 bears no reference to works in this category.

Signed J. F. ROWLANDS

For

DIRECTOR OF PUBLIC WORKS

REFERRED TO

580

77.

Department of Agriculture

Washington, D. C.
February 1, 1914
Circular No. 1234

The following information is being furnished to you for your information. It is a summary of the results of the investigation conducted by the Department of Agriculture, and is intended to be a guide to the farmer. It is not intended to be a substitute for the farmer's own judgment, but it is hoped that it will be of some assistance to him in his work.

Very truly yours,

Director of the Department of Agriculture

ALL COMMUNICATIONS TO BE ADDRESSED TO
DIRECTOR OF AGRICULTURE
AND FORESTS.
JERUSALEM.

54
DEPARTMENT OF AGRICULTURE,
FORESTS & FISHERIES,
AMERICAN COLONY,
JERUSALEM.

26th June, 1929.


Subject Kadoorie Schools - Tulkarem
and Mr. Tabor.

In your reply please quote
No. Ag. 16/5/J
15/I/A
Telephone :- No. 622, JERUSALEM.

Director of Public Works. _____
Director of Lands. _____

al Bu

I shall be glad if you will
furnish me, at the end of each month,
on the enclosed form, with particulars
of the expenditure actually defrayed and
outstanding commitments incurred by you
on account of the above schools, in
accordance with Financial Regulation 55.



E. K. Samir
DIRECTOR OF AGRICULTURE
AND FORESTS.

Copy to Treasurer.

REPLIED

55

GM.

86

AGRICULTURE


AND RURAL ECONOMY

RESEARCH REPORT

NO. 100

Am

Card Ind-Xed under:
Period: 10 to 15 years
Period: 15 to 20 years
Period: 20 to 25 years
Period: 25 to 30 years
Period: 30 to 35 years
Period: 35 to 40 years
Period: 40 to 45 years
Period: 45 to 50 years
Period: 50 to 55 years
Period: 55 to 60 years
Period: 60 to 65 years
Period: 65 to 70 years
Period: 70 to 75 years
Period: 75 to 80 years
Period: 80 to 85 years
Period: 85 to 90 years
Period: 90 to 95 years
Period: 95 to 100 years

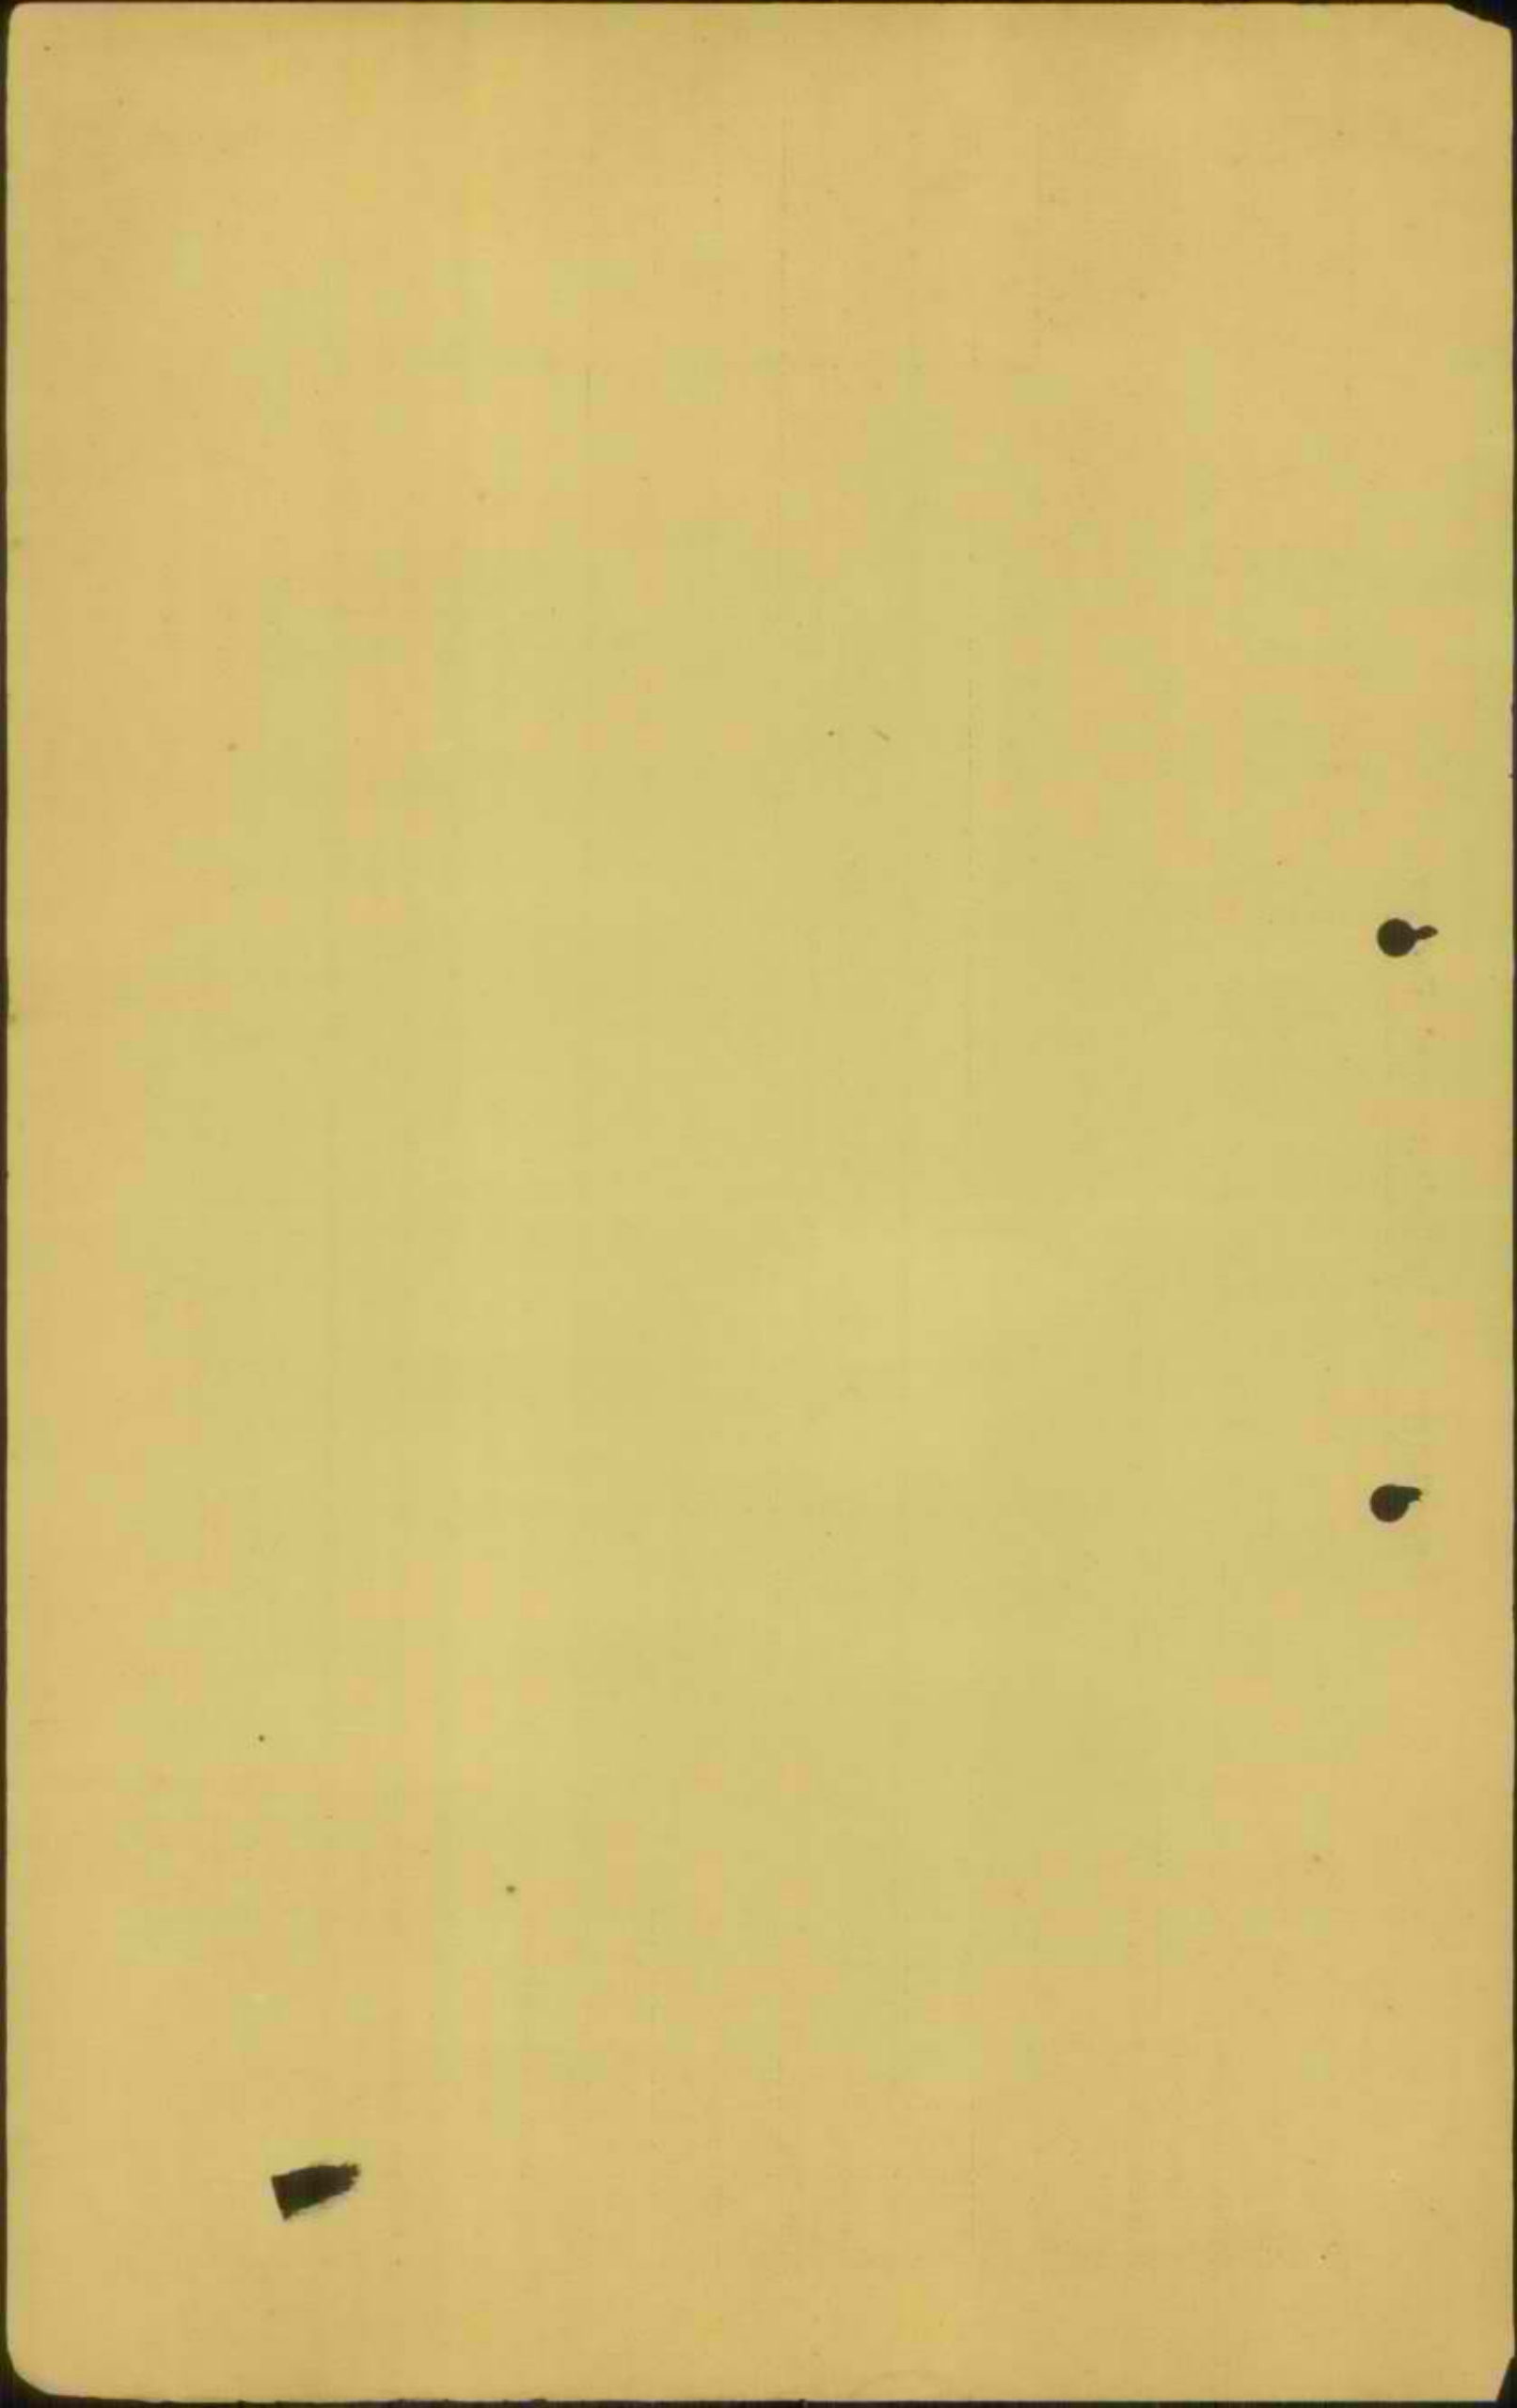

Statement of Account for the Month of _____ 19____

Head : Agriculture and Forests.

Sub-head :	Item
------------	------

Nature of Service

Allotment for the year L P.,

Financial Allocation No. AG/_____ for L.P. _____

No. AG/_____ for L.P.,

No. AG/_____ for L.P.

No AG/_____ for L.P.

Total

1999-2000

[illegible]

Date _____

Signature _____

Office

Station

Statement of Account for the Month of 19

Head: Agriculture and Forests.

Sub-head : Item

Nature of Service

Alotment for the year L.P.

Financial Allocation No. AG/_____ for L.P.

No. AG/____ for L.P.

No. AG/____ for L.P.

No AG/_____ for L.P.

Total

1971-1972-1973

[illegible]

Signature _____

Office

Station

Date _____

Statement of Account for the Month of 19

Head: Agriculture and Forests.

Sub-head :	Item
------------	------

Nature of Service

Allotment for the year 1, P.

Financial Allocation	No.	AG/	for L.P.
"	"	No. AG/	for L.P.
"	"	No. AG/	for L.P.
"	"	No. AG/	for L.P.
Total			

1151100 — 9100/4 — 351 10

[illegible]

Date _____

Signature _____

Office

Station

Statement of Account for the Month of _____ 19____

Head: Agriculture and Forests,

Sub-head: Item

Nature of Service

Allotment for the year L.P.

Financial Allocation No. AG/_____ for L.P. _____

No. AG/_____ for L.P.

No. AG/_____ for L.P.

No AG/_____ for L.P.

Total

1991-1992-1993-1994-1995-1996-1997-1998-1999-2000-2001-2002-2003-2004-2005-2006-2007-2008-2009-2010-2011-2012-2013-2014-2015-2016-2017-2018-2019-2020-2021-2022-2023-2024-2025-2026-2027-2028-2029-2030-2031-2032-2033-2034-2035-2036-2037-2038-2039-2040-2041-2042-2043-2044-2045-2046-2047-2048-2049-2050-2051-2052-2053-2054-2055-2056-2057-2058-2059-2060-2061-2062-2063-2064-2065-2066-2067-2068-2069-2070-2071-2072-2073-2074-2075-2076-2077-2078-2079-2080-2081-2082-2083-2084-2085-2086-2087-2088-2089-2090-2091-2092-2093-2094-2095-2096-2097-2098-2099-2100-2101-2102-2103-2104-2105-2106-2107-2108-2109-2110-2111-2112-2113-2114-2115-2116-2117-2118-2119-2120-2121-2122-2123-2124-2125-2126-2127-2128-2129-2130-2131-2132-2133-2134-2135-2136-2137-2138-2139-2140-2141-2142-2143-2144-2145-2146-2147-2148-2149-2150-2151-2152-2153-2154-2155-2156-2157-2158-2159-2160-2161-2162-2163-2164-2165-2166-2167-2168-2169-2170-2171-2172-2173-2174-2175-2176-2177-2178-2179-2180-2181-2182-2183-2184-2185-2186-2187-2188-2189-2190-2191-2192-2193-2194-2195-2196-2197-2198-2199-2200-2201-2202-2203-2204-2205-2206-2207-2208-2209-2210-2211-2212-2213-2214-2215-2216-2217-2218-2219-2220-2221-2222-2223-2224-2225-2226-2227-2228-2229-2230-2231-2232-2233-2234-2235-2236-2237-2238-2239-2240-2241-2242-2243-2244-2245-2246-2247-2248-2249-2250-2251-2252-2253-2254-2255-2256-2257-2258-2259-2260-2261-2262-2263-2264-2265-2266-2267-2268-2269-2270-2271-2272-2273-2274-2275-2276-2277-2278-2279-2280-2281-2282-2283-2284-2285-2286-2287-2288-2289-2290-2291-2292-2293-2294-2295-2296-2297-2298-2299-2300-2301-2302-2303-2304-2305-2306-2307-2308-2309-2310-2311-2312-2313-2314-2315-2316-2317-2318-2319-2320-2321-2322-2323-2324-2325-2326-2327-2328-2329-2330-2331-2332-2333-2334-2335-2336-2337-2338-2339-2340-2341-2342-2343-2344-2345-2346-2347-2348-2349-2350-2351-2352-2353-2354-2355-2356-2357-2358-2359-2360-2361-2362-2363-2364-2365-2366-2367-2368-2369-2370-2371-2372-2373-2374-2375-2376-2377-2378-2379-2380-2381-2382-2383-2384-2385-2386-2387-2388-2389-2390-2391-2392-2393-2394-2395-2396-2397-2398-2399-2400-2401-2402-2403-2404-2405-2406-2407-2408-2409-2410-2411-2412-2413-2414-2415-2416-2417-2418-2419-2420-2421-2422-2423-2424-2425-2426-2427-2428-2429-2430-2431-2432-2433-2434-2435-2436-2437-2438-2439-2440-2441-2442-2443-2444-2445-2446-2447-2448-2449-2450-2451-2452-2453-2454-2455-2456-2457-2458-2459-2460-2461-2462-2463-2464-2465-2466-2467-2468-2469-2470-2471-2472-2473-2474-2475-2476-2477-2478-2479-2480-2481-2482-2483-2484-2485-2486-2487-2488-2489-2490-2491-2492-2493-2494-2495-2496-2497-2498-2499-2500-2501-2502-2503-2504-2505-2506-2507-2508-2509-2510-2511-2512-2513-2514-2515-2516-2517-2518-2519-2520-2521-2522-2523-2524-2525-2526-2527-2528-2529-2530-2531-2532-2533-2534-2535-2536-2537-2538-2539-2540-2541-2542-2543-2544-2545-2546-2547-2548-2549-2550-2551-2552-2553-2554-2555-2556-2557-2558-2559-2560-2561-2562-2563-2564-2565-2566-2567-2568-2569-2570-2571-2572-2573-2574-2575-2576-2577-2578-2579-2580-2581-2582-2583-2584-2585-2586-2587-2588-2589-2590-2591-2592-2593-2594-2595-2596-2597-2598-2599-2600-2601-2602-2603-2604-2605-2606-2607-2608-2609-2610-2611-2612-2613-2614-2615-2616-2617-2618-2619-2620-2621-2622-2623-2624-2625-2626-2627-2628-2629-2630-2631-2632-2633-2634-2635-2636-2637-2638-2639-2640-2641-2642-2643-2644-2645-2646-2647-2648-2649-2650-2651-2652-2653-2654-2655-2656-2657-2658-2659-2660-2661-2662-2663-2664-2665-2666-2667-2668-2669-2670-2671-2672-2673-2674-2675-2676-2677-2678-2679-2680-2681-2682-2683-2684-2685-2686-2687-2688-2689-2690-2691-2692-2693-2694-2695-2696-2697-2698-2699-2700-2701-2702-2703-2704-2705-2706-2707-2708-2709-2710-2711-2712-2713-2714-2715-2716-2717-2718-2719-2720-2721-2722-2723-2724-2725-2726-2727-2728-2729-2730-2731-2732-2733-2734-2735-2736-2737-2738-2739-2740-2741-2742-2743-2744-2745-2746-2747-2748-2749-2750-2751-2752-2753-2754-2755-2756-2757-2758-2759-2760-2761-2762-2763-2764-2765-2766-2767-2768-2769-2770-2771-2772-2773-2774-2775-2776-2777-2778-2779-2780-2781-2782-2783-2784-2785-2786-2787-2788-2789-2790-2791-2792-2793-2794-2795-2796-2797-2798-2799-2800-2801-2802-2803-2804-2805-2806-2807-2808-2809

[illegible]

Date _____

Signature _____

Office

Station

Nature of Service

Allotment for the year I. P. _____

Financial Allocation	No.	AG/	for L.P.
"	"	No.	AG/ for L.P.
"	"	No.	AG/ for L.P.
"	"	No.	AG/ for L.P.
Total			

[illegible][illegible]

Date _____

Signature _____

Office

Station

Nature of Service _____

Financial Allocation No.	No.	AG/	for L.P.
"	"	AG/	for L.P.
"	"	AG/	for L.P.
"	"	AG/	for L.P.
Total			

Date	No. of Voucher	To Whom Payable	Particulars of Service.		Total brought forward from last statement.
			Expenditure defrayed during the month.		
			L. P.	M. Is	

Signature _____
Office _____
Station _____

Head : Agriculture and Forests.

Nature of Service

Allotment for the year L.P. _____

Financial Allocation No. AG/_____ for L.P. _____

No. AG/_____ for L.P. _____

No. AG/_____ for L.P. _____

No AG/_____ for L.P._____

Total

133300—133304—GL P.

[illegible]

Date _____

Signature _____

Office

Station

Nature of Service
1. <i>General</i>
2. <i>Special</i>
3. <i>Other</i>

Allotment for the year L.P. _____

Financial Allocation No. AG/_____ for L.P.

No. AG/_____ for L.P. _____

No. AG/_____ for L.P. _____

No AG/_____ for L.P. _____

Total _____

12110-1-001-01, 02

[illegible]

Signature _____

Office

Station _____

Date _____

67

Head: Agriculture and Forests.

Sub-head : Item

Nature of Service

11100-11000-81.12

Allotment for the year 1, P.

Financial Allocation No. AG/____ for L.P.,

No. AG/_____ for L.P.,

No. AG/____ for L.P.

No AG/___ for L.P..

Total

[illegible]

Date _____

Signature _____

Office

Station

3/9

7th May 1929

Treasurer.

52

Subject : Advances - Kadoorie
Agricultural School.
Reference: Your 486/2719 of 17-4-29.

The charges for railway freight bills P.915, P.936, G.1308 and G.1320 have been booked in my records during January 1929.

2. The charges in respect of payments for wages Mount Tabor Jewish Agricultural School have now been reported and appear in the April 1929 operations.

3. The difference of I.P.O.340 mils is in respect of transport charges Railway Bill P.774 of October 1928 debited erroneously to XXIV-55 P.W. Other Charges Railway Fares and Freights, and I am arranging a transfer voucher to put the matter right.

With the foregoing reconciliations the balance of I.P.2653.184 is agreed to.

(Sd/-) M. BROLET
DIRECTOR OF PUBLIC WORKS

In your reply please quote

No.

486/2719.

17th April, 1929.

Director,
Department of Public Works.

Subject : Advances - Kadoorie Agricultural
Schools.

Reference: Your 3/9 of 27 - 3 - 29.

It is observed that the following amounts
have not been included in your records :-


Palestine Railways Bill P.915)Transport	£P.mils	
" " P.936 (Charges -	.075	2/1/29
" " G.1308)Arab Agri-	.510	2/1/29
" " G.1320(cultural	3.055	1/7/29
School	11.780	22/1/29
	<u>£P.15.420</u>	
P.W.D. Voucher ND/4449 of)Wages -	5.850	
30 - 12 - 28 (Jewish		
" Voucher ND/4354 of)Agricul-	13.600	
5 - 12 - 28 (tural		
School	<u>£P.19.450</u>	

The amount charged for transport as per bill N/492 of the 16th November, 1928, is £P.4.950 mils, and not £P.5.290 mils, as shown in your statement under reference.

2. The correct balance at the 31st December, 1928, would therefore appear to be as under :-

Amount shown in your Statement	£P. mils
Transport charges as shown above	2,618.654
Wages - Jewish Agricultural School	15.420
	<u>19.450</u>
	2,653.524
Less amount shown in excess in respect of Bill N/492	<u>.340</u>
Debit balance at 31.12.28	<u>£P.2,653.184</u>

3. I shall be glad if you will confirm this balance.

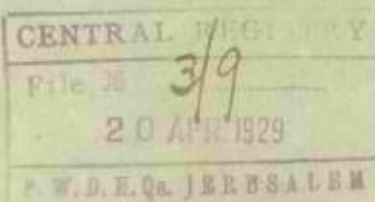

GOL.

TREASURER.

A close-up photograph of a piece of lined paper with handwritten marks. On the left, there is a small, stylized signature or set of initials. To its right, there are two larger, more complex handwritten marks that appear to be stylized letters or symbols. The paper has horizontal lines and a red vertical margin line on the left.

3/9

March 27th, 1929

Treasury

47

Subject : Advances - Kadoorie
Agricultural Schools.
Reference: Your 486/1944 of 13.3.29.

Tulkarem (Arab) School.
The amount spent up to 31.12.29
is LP.2618.654 as per attached
statement of vouchers passed for
payment.

Mount Tabor (Jewish)
School. No expenditure incurred
yet.

(Sd) R. HEDLEY

DIRECTOR OF PUBLIC WORKS

Detailed Statement of Expenditure of Deposits
 Sir E. Kadoorie Bequest Tulkarem Agricultural
 School up to 31st December 1928.

Date	Voucher	Service	F.A.	Amount	Remarks
1.1.28	5846	Wages & Materials during 1927	-	97.218	Fr. 174/8036
31.12.28	8406	Landing charges	267	-.177	3.2.2.27
"	8414	"	"	-.334	
"	8457	"	"	3.220	
"	8463	Tramway Metals etc.	"	763.317	
"	8441	Sliding door gear, ventil. etc.	"	111.936	
"	"	Inspection	278	1.696	
"	8463	Hayshed	"	114.633	
"	8411	Landing charges	302	1.689	
"	8463	Inspection & Insurance	"	2.246	
"	8441	Fencing & Inspection	"	53.140	
27.3.29	N/70	Digging trial holes for foundations.	71	4.200	
31.5.28	N/196	Cost of material etc	"	1.255	
30.6.28	N/245	Erecting sample masonry wall	"	3.000	
9.8.28	N/310	Digging trial holes for foundations	"	-.900	
2.10.28	N/396	Deviation & road formation	"	24.000	
12.10.28	N/403	Final bill on above	"	10.000	
12.10.28	N/408	Transporting water tanks	"	1.320	
31.10.28	N/439	Wages for October 1929	"	15.600	
3.3.28	N/28	1st payment on account	87	100.000	
1.4.28	N/102	2nd " " "	"	50.000	
13.5.28	N/159	Final bill on above	"	67.490	
27.10.28	N/422	Iron sheeting	"	23.500	
27.10.28	N/423	Cost of nails	"	3.400	
"	N/424	Cost of timber	"	10.499	
"	N/425	30 tons of cement Waxy 1928	400	84.000	
"	N/426	October 1928	"	9.000	
29.10.28	N/427	-do-	"	10.210	
31.10.28	N/450	Miscellaneous Oct. 1928	"	2.755	
16.11.28	N/489	Pipe fittings	"	2.293	
"	N/492	Transport fares Oct. 1928	"	5.290	
"	N/495	November 1st to 15th 1928.	"	4.045	
17.11.28	N/497	Excavation 400 M3	"	20.000	
19.11.28	N/502	126.32 M3 Jouzieh	"	44.212	
"	N/503	57.57 M3 Foulieh	"	25.906	
20.11.28	N/505	Piping, wood screws etc	"	12.140	
"	N/507	Transport of 30 tons cement	"	10.075	
"	N/508	Iron rods 8584 Kgs	"	80.351	
"	N/509	S.W. pipes etc	"	74.401	
"	N/510	Interceptors, piping etc.	"	28.194	
22.11.28	N/518	Solder, piping etc	"	5.700	
27.11.28	N/529	Pipe fittings	"	1.195	
"	N/532	Gully traps etc	"	20.332	
30.11.28	N/546	Salary for November 1928	"	20.000	
30.11.28	N/548	Digging trial holes	"	2.026	
"	N/557	175 M2 of stones supplied	"	35.000	
"	N/559	November 16th, 30th 1928	"	12.600	
"	N/567	Miscellaneous, November 1928.	"	9.687	

Detailed Statement of Expenditure of Deposits
Sir E. Kadoorie Bequest Tulkarem Agricultural
School up to 31st December 1928.

Date	Voucher	Service	P.A.	Amount	Remarks
1.1.28	5846	Wages & Materials during 1927	-	97.218	Fr. 174/8036
31.12.28	8406	Landing charges	267	-1.177	4.2.2.27
"	8414	"	"	-1.334	
"	8457	"	"	3.220	
"	8463	Tramway Metals etc.	"	763.317	
"	8441	Sliding door gear, ventil. etc.	"	111.936	
"	"	Inspection	278	1.696	
"	8463	Hayshed	"	114.633	
"	8411	Landing charges	302	1.689	
"	8463	Inspection & Insurance	"	2.246	
"	8441	Fencing & Inspection	"	53.140	
27.3.29	N/70	Digging trial holes for foundations.	71	4.200	
31.5.28	N/196	Cost of material etc	"	1.255	
30.6.28	N/245	Erecting sample masonry wall	"	3.000	
9.8.28	N/310	Digging trial holes for foundations	"	-1.900	
2.10.28	N/396	Deviation & road formation	"	24.000	
12.10.28	N/403	Final bill on above	"	10.000	
12.10.28	N/408	Transporting water tanks	"	1.320	
31.10.28	N/439	Wages for October 1928	"	15.600	
3.3.28	N/28	1st payment on account	87	100.000	
1.4.28	N/102	2nd "	"	50.000	
13.5.28	N/159	Final bill on above	"	67.490	
27.10.28	N/422	Iron sheeting	"	23.500	
27.10.28	N/423	Cost of nails	"	3.400	
"	N/424	Cost of timber	"	10.499	
"	N/425	30 tons of cement	400	84.000	
"	N/426	October 1928	"	9.000	
29.10.28	N/427	-do-	"	10.210	
31.10.28	N/450	Miscellaneous Oct. 1928	"	2.755	
16.11.28	N/489	Pipe fittings	"	2.293	
"	N/492	Transport fares Oct. 1928	"	5.290	
"	N/495	November 1st to 15th 1928.	"	4.045	
17.11.28	N/497	Excavation 400 M3	"	20.000	
19.11.28	N/502	126.32 M3 Jouziah	"	44.212	
"	N/503	57.57 M3 Feulish	"	25.908	
20.11.28	N/505	Piping, wood screws etc	"	12.140	
"	N/507	Transport of 30 tons cement	"	10.075	
"	N/508	Iron rods 8584 kgs	"	80.351	
"	N/509	S.S. pipes etc	"	74.401	
"	N/510	Interceptors, piping etc.	"	28.194	
22.11.28	N/518	Solder, piping etc	"	5.700	
27.11.28	N/529	Pipe fittings	"	1.195	
"	N/532	Gully traps etc	"	20.332	
30.11.28	N/546	Salary for November 1928	"	20.000	
30.11.28	N/548	Digging trial holes	"	2.026	
"	N/557	175 M2 of stones supplied	"	35.000	
"	N/559	November 16th, 30th 1928	"	12.600	
"	N/567	Miscellaneous, November 1928.	"	9.687	

Detailed Statement of Expenditure of Deposits
 Sir E. Kaddorie Bequest Tulkarem Agricultural
 School up to 31st December 1928.

Date	Voucher	Service	V.A.	Amount	Remarks
1.1.28	5846	Wages & Materials during 1927	-	97.218	Fr. 174/8036
31.12.28	8406	Landing charges	267	-1.177	1.2.2.27
"	8414	"	"	-1.334	
"	8457	"	"	3.220	
"	8463	Tramway Metals etc.	"	763.317	
"	8441	Sliding door gear, ventil. etc.	"	111.936	
"	"	Inspection	278	1.696	
"	8463	Hayshed	"	114.633	
"	8411	Landing charges	302	1.683	
"	8463	Inspection & Insurance	"	2.246	
"	8441	Fencing & Inspection	"	53.140	
27.3.29	N/70	Digging trial holes for foundations.	71	4.200	
31.5.28	N/196	Cost of material etc	"	1.255	
30.6.28	N/245	Erecting sample masonry wall	"	3.000	
9.8.28	N/310	Digging trial holes for foundations	"	-1.900	
2.10.28	N/396	Deviation & road formation	"	24.000	
12.10.28	N/403	Final bill on above	"	10.000	
12.10.28	N/408	Transporting water tanks	"	1.330	
31.10.28	N/439	Wages for October 1929	"	15.000	
3.3.28	N/28	1st payment on account	87	100.000	
1.4.28	N/102	End	"	50.000	
13.5.28	N/159	Final bill on above	"	67.490	
27.10.28	N/422	Iron sheeting	"	23.500	
27.10.28	N/423	Cost of nails	"	3.400	
"	N/424	Cost of timber	"	10.499	
"	N/425	30 tons of cement Warky 1928	400	84.000	
"	N/426	October 1928	"	9.000	
29.10.28	N/427	-do-	"	10.210	
31.10.28	N/450	Miscellaneous Oct. 1928	"	2.755	
16.11.28	N/489	Pipe fittings	"	2.293	
"	N/492	Transport fares Oct. 1928	"	5.290	
"	N/495	November 1st to 15th 1928.	"	4.045	
17.11.28	N/497	Excavation 40 M3	"	20.000	
19.11.28	N/502	126.32 M3 Jouziah	"	44.212	
"	N/503	57.57 M3 Fayliah	"	25.906	
20.11.28	N/505	Piping, wood screws etc	"	12.140	
"	N/507	Transport of 30 tons cement	"	10.075	
"	N/508	Iron rods 8534 Kgs	"	80.351	
"	N/509	R.I. pipes etc	"	74.401	
"	N/510	Interceptors, piping etc.	"	28.194	
22.11.28	N/518	Solder, piping etc	"	5.700	
27.11.28	N/529	Pipe fittings	"	1.195	
"	N/532	Cylinder traps etc	"	20.332	
30.11.28	N/546	Salary for November 1928	"	20.000	
30.11.28	N/548	Digging trial holes	"	2.026	
"	N/557	175 M2 of stones supplied	"	35.000	
"	N/559	November 16th, 30th 1928	"	12.600	
"	N/567	Miscellaneous, November 1928.	"	9.687	

66Date	Voucher	Service	F.A.	Amount
3.12.28	N/576	Excavation 378.21 M3	400	18.910
"	N/577	Zif Zif 80 M3	"	50.400
6.12.28	N/585	Sink etc	"	4.390
8.12.28	N/574	Windows grills	"	6.180
11.12.28	IV.4002	Keenes cement	"	1.413
15. "	N/602	Tiles and ridges	"	231.745
15. "	N/604	Jousieh 151.71 M3	"	53.098
15. "	N/605	124.97 M3 fouliet	"	56.236
15. "	N/606	Zif Zif 70 M3 supplied	"	44.100
18. "	N/612	December 1st to 15th 1928	"	10.805
21. "	N/626	Excavation final bill 129.24 M3	"	6.462
21. "	N/628	Freightage on material	"	0.280
22. "	N/642	60.27 M3 metal and 24.23 M3 jous.	"	22.947
22. "	N/643	Adesieh 8 M3	"	6.000
24. "	N/652	Salary for December 1928	"	20.000
24. "	N/665	175 M2 of stones	"	35.000
24. "	N/685	Miscellaneous December 1928	"	3.658
24. "	N/689	Cost of petrol	"	4.100
25. "	N/698	Transport of cement keenes	"	0.105
I.V. 6/4147		Armoured Hose pipe	"	4.900
27.12.28	700	Timber	"	51.793
29.12.28	705	Fencing etc from Haifa transport	"	1.950
				<u>LP 1153.884</u>

Total LP 26/8.654

66Date	Voucher	Service	F.A.	Amount
3.12.28	N/576	Excavation 378.21 M3	400	18.910
"	N/577	Zif Zif 80 M3	"	50.400
6.12.28	N/585	Sink etc	"	4.390
8.12.28	N/574	Windows grills	"	6.180
11.12.28	IV.4092	Keenes cement	"	1.413
15. "	N/602	Tiles and ridges	"	231.745
15. "	N/604	Jousieh 151.71 M3	"	53.098
15. "	N/605	124.97 M3 foulief	"	56.236
15. "	N/608	Zif Zif 70 M3 supplied	"	44.100
18. "	N/612	December 1st to 15th 1928	"	10.805
21. "	N/626	Excavation final bill 129.24 M3	"	6.462
21. "	N/628	Freightage on material	"	0.280
22. "	N/642	60.27 M3 metal and 24.23 M3 jouz	"	22.947
22. "	N/643	Adesieh 8 M3	"	6.000
24. "	N/652	Salary for December 1928	"	20.000
24. "	N/665	175 M2 of stones	"	35.000
24. "	N/685	Miscellaneous December 1928	"	3.658
24. "	N/689	Cost of petrol	"	4.100
25. "	N/698	Transport of cement keenes	"	0.105
I.V.G/4147		Armoured Hose pipe	"	4.900
27.12.28	700	Timber	"	51.793
29.12.28	705	Fencing etc from Haifa transport	"	1.950
				<u>LP. 1153.884</u>

Total M 2618.654

66Date	Voucher	Service	F.A.	Amount
3.12.28	N/576	Excavation 378.21 M3	400	18.910
"	N/577	Zif Zif 80 M3	"	50.400
6.12.28	N/585	Sink etc	"	4.390
8.12.28	N/574	Windows grills	"	6.180
11.12.28	IV.4092	Keenes cement	"	1.413
15. "	N/602	Tiles and ridges	"	281.745
15. "	N/604	Jousieh 151.71 M3	"	53.098
15. "	N/605	124.97 M3 foulief	"	56.236
15. "	N/608	Zif Zif 70 M3 supplied	"	44.100
18. "	N/612	December 1st to 15th 1928	"	10.806
21. "	N/626	Excavation final bill 129.24 M3	"	6.462
21. "	N/628	Freightage on material	"	0.280
22. "	N/642	60.27 M3 metal and 24.23 M3 jous.	"	22.947
22. "	N/643	Adesieh 8 M3	"	6.000
24. "	N/652	Salary for December 1928	"	20.000
24. "	N/665	175 M2 of stones	"	35.000
24. "	N/685	Miscellaneous December 1928	"	3.658
24. "	N/689	Cost of petrol	"	4.100
25. "	N/698	Transport of cement keenes	"	0.105
I.V.C/4147		Armoured Hose pipe	"	4.900
27.12.28	700	Timber	"	51.793
29.12.28	705	Fencing etc from Haif transport	"	1.950
				<u>12. 1153.664</u>

Total N° 2618.654

Ref No Ac/9

PUBLIC WORKS DEPARTMENT
NABLUS DISTRICT

Nablus, March 21st, 1929

Director of Public Works
JerusalemSubject: Advances - Kadoorie
Agricultural School, Tulkarem
Reference: Your 3/9 dated 17.3.29Particulars called for in above are as
under:-

Date	V.N.	Payable to	Particulars of Services	Amount
AGRICULTURAL SCHOOL, TULKAREM III-10 MAIN BUILDING FINANCIAL ALLOCATION 71				
27.3.29	N/70	Wages of labourers 25/2 - 6.3.29	Digging trial holes for found- ations	4.200 ✓
31.5.28	N/196	Engineer i/c	Cost of material etc	1.255 ✓
30.6.29	N/245	Mr Basheer Yaseen	Erecting sample masonry wall	3.000 ✓
9.8.28	N/310	Wages of labourers 1st to 7th July	Digging trial holes for foundations	.900 ✓
2.10.28	N/396	Yousif Kasim of Nablus	1st payment, deviation and road formation	24.000
12.10.28	N/403	- do -	Final bill on above	10.000
12.10.28	N/408	Engineer i/c	Transporting water tanks	1.320
31.10.28	N/439	Mr G.G.Martin	Wages for October 1929	15.600
				LP 60.275
AGRICULTURAL SCHOOL, TULKAREM ITEM I - 5 FENCING FINANCIAL ALLOCATION 87				
3.3.28	N/28	Mr.N.Epstein, Haifa	1st payment on account	100.000 ✓
1.4.28	N/102	do	2nd payment on account	50.00 ✓
13.5.28	N/159	do	Final bill on above	67.490 ✓
27.10.28	N/422	Messrs Fridmann	Iron sheeting	23.500
27.10.28	N/423	Messrs Limberg	Cost of nails	3.400
27.10.28	N/424	Messrs D.Ismojik	Cost of timber	10.499
				LP 254.889

1984-1985

Date	V.No	Payable to	Particulars of Service	Amount
Tulkarem Agricultural School - Capital Expenditure				
FARM BUILDING				
F.A.No/400				
27.II.28	N/425	Portland Cement Coy	30 tons of cement	84.000
27.II.28	N/426	Wages of labourers	October 1928	9.000
29.II.28	N/427	- do -	do	10.210
31.II.28	N/450	Engineer i/c	Miscellaneous Oct.1928	2.755
16.II.28	N/489	Mr J.Botovosky Tel Aviv	Pipe fittings	2.293
16.II.28	N/492	C.A.Palestine Railways	Transport fares Oct.1928	5.290
16.II.28	N/495	Wages of labour	November 1st to 15th,1928	4.045
17.II.28	N/497	Mohd. Ibrahim,Nablus	Excavation 400 M3	20.000
19.II.28	N/502	Ibrahim Said el Din,Nablus	126.32 M3 jouzieh	44.212
19.II.28	N/503	Mohd Sabir,Nablus	57.57 M3 foulieh	25.906
20.II.28	N/505	Wilintzik,Tel Aviv	Piping, wood screws etc	12.140
20.II.28	N/507	C.A.Palestine Rlys	Transport of 30 tons cement	10.075
20.II.28	N/508	M.Pehlmann,Jaffa	Iron Rods 8584 Kgs	80.351
20.II.28	N/509	Fridmann Bros,Tel Aviv	S.W.Pipes etc	74.401
20.II.28	N/510	L.Gluckmann,Jaffa	Interceptors, piping etc	28.194
22.II.28	N/518	Fridmann Bros,Tel Aviv	Solder, piping etc	5.700
27.II.28	N/529	L Gluckmann,Jaffa	Pipe fittings	1.195
27.II.28	N/532	Fridmann Bros, Tel Aviv	Gulley traps/ etc	20.332
30.II.28	N/546	G.G.Martin	Salary for November 1928	20.000
30.II.28	N/548	Ahmed Keisi, Tulkarem	Digging trial holes	2.026
30.II.28	N/557	Haj Hasan Kandah "	175 M2 of stones supplied	35.000
30.II.28	N/559	Wages of labourers	November 16th - 30th 1928	12.600
30.II.28	N/567	Engineer i/c	Miscellaneous, November 1928	9.687
3.II.28	N/576	Mohamed Ibrahim Nablus	Excavation 378.21 M3	18.910
3.II.28	N/577	Ali Ahmed Keisi,Tulk	Zif Zif 80 M3	50.400
6.II.28	N/585	Fridmann Bros, Tel Aviv	Sink etc	4.390
8.II.28	N/574	H.Limitz,Jaffa	Window grills	6.180
11.II.28	I.V.4092	D.P.W.	Keenes cement	1.413
15.II.28	N/602	Abed el Nur & Fils,Jaffa	Tiles and ridges	231.745
15.II.28	N/604	Ibrahim Said el Din Nab.	Jouzieh 151.71 M3	53.098
15.II.28	N/605	Mohd. Sabir, Nablus	124.97 M3 foulief	56.236
15.II.28	N/608	Ali Ahmed Keisi Tulk.	Zif Zif 70 M3 supplied	44.100
18.II.28	N/612	Wages of labourers	December 1st to 15th,1928	10.805
21.II.28	N/626	Mohamed Ibrahim,Nablus	Excavation final bill 129.24M3	6.462
21.II.28	N/628	C.A.Palestine Railways	Freightage on material	0.280
22.II.28	N/642	Ibrahim Said el Din	60.27 M3 metal & 24.23 M3 jouz.	22.947
22.II.28	N/643	Mohamed Sabir,Nablus	Adesieh 8 M3	6.000
24.II.28	N/652	Mr G.G.Martin	Salary for December 1928	20.000
24.II.28	N/665	Haj Hasan Kandah,Tulk	175 M2 of stones	35.000
24.II.28	N/685	Engineer i/c	Miscellaneous December 1928	3.658
24.II.28	N/689	Haim Kahan's Successors	Cost of petrol	4.100
25.II.28	N/698	C.A.Palestine Railways	Transport of cement keenes	0.105
I.V. G/4147		D.P.W.	Armoured Hose pipe	4.900
27.II.28	N/700	Abdelnour & fils,Jaffa	Timber	51.793
29.II.28	N/705	C.A.Palestine Railways	Fencing etc from Haifa	
			Transport	1.950

CENTRAL REGISTRY

3/9

23 MAR 1929

LP 1153.884

Charles P. Smith
ENGINEER IN CHARGE
NABLUS DISTRICT

3/9

March 17th, 1929.

Engineer in charge
Nablu District.

Subject : Advances - Kadoorie
Agricultural School.

Please submit as soon as possible
a detailed statement of expenditure
incurred up to 31-12-28 on above work.

(Sd/-) B. BROUST

DIRECTOR OF PUBLIC WORKS

47

Tel. Address: TREASURY, JERUSALEM
Tel. No.: Jerusalem 85

THE TREASURY,
JERUSALEM.

In your reply please quote

No.

486/1944

13 March, 1929.

Director,
Department of Public Works.

Ba
11

Subject: Advances - Kadoorie
(Arab) Agricultural
School. Kadoorie
(Jewish) Agricultural
School

I shall be glad if you will
furnish me as soon as possible with
a statement in respect of the above
mentioned account up to 31st December,
1928.

CENTRAL REGISTRY
File 319
14 MAR. 1929
P. W. D. H. Q. JERUSALEM

Ullman
for TREASURER.
REPLIED 51

AH.

16/5(J).

5th February, 1929.
: Kadoorie School - Jewish-
Budget.

TREASURER.

file
W.H.

Confirming my telephone request:
can you kindly provide me with a statement
of the immediate balance on the Kadoorie
bequest as I am now proceeding to prepare
draft estimates for the second (Jewish)
school, which is to be sited near Mt. Tabor?

E. R. SAWER

CENTRAL REGISTRY
File No. <u>319</u>
6 - FEB. 1929
P. W. D. H. Q. JERUSALEM

DIRECTOR OF AGRICULTURE
AND FORESTS.

Copy to Director of Public Works. /

45

CONFIDENTIAL.

15/1/A.

JERUSALEM.
6th September, 1928.
: Kadoorie Agricultural Schools:
Finance.

CHIEF SECRETARY.

Seen J.P.
8.9.28.
W.D.V.W.

I refer to your instruction that an amended scheme of agricultural instruction should be submitted based on the assumption that the Government grant-in-aid to the above-mentioned schools which was approved - with reference to the Arab school - by the Secretary of State in Despatch 899 of 13.7.27, can no longer be made available.

2. The attached financial statement derived from details provided by the Treasurer's No.454/5037 of 29.8.28, permits an amendment of my earlier application in view of an accumulation of interest during the five years which have elapsed since the scheme was provisionally approved. I append a précis of negotiations in explanation of such delay.

3. As the provision of vocational training is admittedly a first and urgent requirement of the local agricultural industry and essential to any sound development, I am availing myself of the verbal authority granted on the occasion of our recent interview with His Excellency to submit proposals which would not involve a repetition of earlier delays in obtaining endorsement by the Imperial Treasury, Secretary of State, Ministry of Agriculture, the executors in Shanghai and local technical departments.

4. Detailed plans have been completed with reference to the Arab School; indents for material have been placed in England and tenders for building have been received. Land has been acquired; buildings have been sited and provisional plans signed for the Jewish School at Mount Tabor. To scrap the scheme at this stage would consequently not only involve a probable further delay of years in effective action but a very considerable actual loss of expenditure on drawings, material, etc.

5. I have consequently to request your favourable consideration of the following amended financial scheme which would enable me to proceed with the organisation of both schools on the lines already approved:-

- (a) The residential school and farm buildings to be completed at Tulkarem by 1st July, 1929; the institution to be opened on that date and a grant-in-aid of LP.1,000 made by Government to cover estimated deficit for six months.
- (b) As detailed estimates for the Jewish School have yet to be completed by the Public Works Department and submitted to the Secretary of State, it is improbable that buildings will be ready for occupation before 1st January, 1930. On the assumption, however, that it may be possible to open the second school on that date, a total grant-in-aid of LP.4,000 p.a. would be required for these schools

in 1930 and following years, as compared with LP.7,000 originally approved.

6. It is submitted that such a sum which would represent Government's sole contribution to the cost of agricultural education, constitutes no unreasonable demand on the administration of an agricultural territory of a very backward character.

I R. SAWER

DIRECTOR OF AGRICULTURE
AND FORESTS.

Copy to Treasurer, Jerusalem.
Director of Public Works, Jerusalem. _____

FP.

CENTRAL REGISTRY
File No 3/9
8 - SEP 1928
P. W. D. H. Qs. JERUSALEM

RECEIVED BY THE DIRECTOR, FBI, WASHINGTON, D.C., 10/1/54

TO: DIRECTOR, FBI, WASHINGTON, D.C.
FROM: SAC, NEW YORK (100-100000)
SUBJECT: [Illegible]

10/1/54

RE: [Illegible]

[Illegible]

[Illegible]

SEARCHED	INDEXED
SERIALIZED	FILED
OCT 1 1954	
FBI - NEW YORK	

Card not to be used
by
Initials in ink
Initials in ink

44

Statement showing that if a grant-in-aid is not provided, it will be necessary in order to accumulate interest from capital to defer the Kadoorie School Schemes until 1.7.1940.

Principal	LP. 71,322
30.6.29. 4½%	<u>3,209</u>
	74,531
30.6.30. 4½%	<u>3,353</u>
	77,884
30.6.31. 4½%	<u>3,504</u>
	81,388
30.6.32. 4½%	<u>3,663</u>
	85,051
30.6.33. 4½%	<u>3,827</u>
	88,878
30.6.34. 4½%	<u>4,000</u>
	92,878
30.6.35. 4½%	<u>4,180</u>
	97,058
30.6.36. 4½%	<u>4,368</u>
	101,426
30.6.37. 4½%	<u>4,564</u>
	105,990
30.6.38. 4½%	<u>4,770</u>
	110,760
30.6.39. 4½%	<u>4,984</u>
	115,744
30.6.40. 4½%	<u>5,208</u>
	<u>LP. 120,952</u>

<u>Recurrent Expenditure</u>	=	LP. 6,700
Principal	LP. 120,952	
Less: Capital	<u>33,291</u>	
	87,661	
Interest @ 4½%	LP. 3,945	
School Fees	1,100	
Farm Receipts	 <u>1,650</u>	
		<u>6,695</u>
Deficit.....	LP.	<u>5</u>

KADOORIE SCHOOLS.

Statement showing grants-in-aid required during
1929 and following years for one school.

As at 30.6.1928, the amount of the bequest was LP.142,645

One half for each school LP. 71,322

Add: Interest @ $4\frac{1}{2}\%$ p.a. up to 30.12.1928.. 1,604
72,926.

Less following expenditure:

Recurrent LP. 200
Capital 33,291
At say equated dated 30.12.1928. 33,491

Add: Interest @ $4\frac{1}{2}\%$ p.a. up to 30.6.1929... 39,435
888
LP.40,323

Recurrent expenditure for one school 1.7.29. to 31.12.29.

(6 months) LP.3,350.

<u>Less:</u>	Interest	LP. 888			
	School Fees	550			
	Farm Receipts	<u>825</u>			<u>2,263</u>
	Grant-in-aid required				<u>LP.1,087.</u>

Recurrent expenditure for one school in 1930 and

thereafter..... LP.6,700.

<u>Less:</u>	Interest	LP. 1776			
	School Fees	1100			
	Farm Receipts	<u>1650</u>			<u>4,526</u>
	Grant-in-aid required				<u>LP. 2,174</u>

Note

Correspondence regarding the
Jewish Agricultural School
was transferred to file

72 14/7/1


5/2/28

All communications to be addressed to the

DIRECTOR OF PUBLIC WORKS

P. O. Box 285

JERUSALEM

PUBLIC WORKS DEPARTMENT
JERUSALEM

In reply please quote

No.

Telephone No. 58, JERUSALEM

202/27.

SECRETARIAT
GOVERNMENT OFFICES
JERUSALEM

14.1.27.

Sir,

41

I am directed to transmit for your information a copy of the proceedings of a conference held at Government Offices on the 12th of January, 1927, in regard to the agricultural schools to be built as a charge to the Kadoorie Bequest, and to inform you that the minutes are confirmed and that appropriate action thereon may now be initiated.

42

2. I enclose a copy of a letter addressed to the Director of lands.

I am,

Sir,

Your obedient servant.

Sgd. E. Mills

for CHIEF SECRETARY.

*File in 3/9**Orig in 14/4/1*

H.B. Lees, Esq., M.C.,

4

202/27

14th January, 1927.

Director,
Department of Lands.

41

I am directed to transmit a copy of minutes of proceedings of a conference held at Government Offices on the 12th of January 1927, in regard to the agricultural schools to be built under the Kadoorie Bequest and to enquire what is the position as regards the acquisition of land at Tulkarem already recommended as a site for one of the schools ?

2. I enclose a letter addressed to officers present at the conference.

Sgd. E. Mills
for CHIEF SECRETARY.

41

Note of a Conference held at
Government Offices
on 12.1.27.

Subject : Agricultural Schools
(Kadoorie Bequest).
Present: His Excellency the High Commissioner
Chief Secretary.
Messrs, Bowman, Sawyer and Lees.

1. His Excellency read Colonial Office Despatch No.1489 of 4.11.26 (folio 16684/26) conveying approval for the establishment of a Jewish and an Arab Agricultural School and asking for detailed recommendations. He noted that there had been a certain difference of view between the Directors of Agriculture and Education in respect of the general policy governing admission to the Arabic school at Tulkarem.

Mr. Sawyer, basing his ideas mainly on financial considerations had envisaged a school of two classes, 10 senior and 30 junior, undergoing a three years' course.

Mr. Bowman felt that this would preclude the possibility of promising secondary school pupils joining the school except after triennial periods. He would have liked, if finance permitted, a system by which say 33 pupils entered the school annually.

2. D.P.W. stated that he was preparing approximate estimates for the cost of the farm buildings which it was thought at a previous meeting of the Executive Council might have to be constructed ahead of the school buildings. Accommodation in the school buildings would be on the basis of Mr. Sawyer's proposal above. He stated that there was

still a doubt as to the quantity of water available on the proposed site for the Arab school at Tulkarem. The Director of Agriculture estimated 33 c.m. a day was the minimum supply required for schools, dairy and farm uses; additional water would be desirable for irrigation purposes. Mr. Lees said that whilst available water supplies would almost certainly yield to 33 c.m. a day it was necessary to make further tests and borings before any reliable estimate of the water available could be given; in particular it was necessary to deepen the existing well near the nursery at a cost of perhaps LE.200.

His Excellency directed that this should be carried out forthwith as the final expropriation of the land (which the Director of Lands had in hand) must not be carried out until all doubt as to the water supply was removed.

As regards the site for the Jewish school, Mr. Sawyer said that no agreement had been reached about a gift of land for the purpose by the P.Z.E. or J.N.F. He was waiting a final communication on the subject which Colonel Kisch advised him might not be satisfactory.

His Excellency instructed Mr. Sawyer to enquire and report what alternative sites for the Jewish agricultural school in Northern Palestine might be obtained in the event of the Jewish National Fund's engagements falling through.

Mr. Bowman suggested that a Committee might now be formed of Government officers and Jewish non-officials to discuss the general policy and arrangements for the Jewish agricultural school.

His Excellency agreed and directed that a committee should be appointed under the chairmanship of Mr. Sawyer, with Mr. Bowman as a member together with two or three suitable Jewish persons, and Chief Secretary was directed to consult Colonel Kisch and others as to names of suitable persons.

D.P.W. was directed to submit as soon as possible approximate estimates for buildings in connection with the Arab agricultural school. It would then be possible to estimate what balance of the bequest would be available for endowment purposes. His Excellency saw little prospect at present for the Government being in a position to increase the subsidy of LE.7000 promised for the two schools.

13.1.27.

(copy)

17780/26

SECRETARIAT
GOVERNMENT OFFICES
JERUSALEM

7th December, 1926.

Director,
Department of Public Works.

*Copy to 3/9
original in 14/4/1*

Subject : Kadoorie Bequest.

In confirmation of the verbal instructions of His Excellency the High Commissioner at the meeting of Executive Council on the 30th of November, I am directed to request you to complete plans and estimates for the building of the Arab Agricultural School at Tulkarem.

(sgd) S. Moody

f. CHIEF SECRETARY

Copy to ; Director, Department of
Agriculture and Forests.

(copy)

Despatch No.1058

5th September, 1925

Reference No.Adm.445.

*Why in 3/9
original with
enclosure
in 14/4/1*

Sir,

I have the honour to refer to your despatch No.458 of the 9th of April on the subject of the utilisation of funds available under the Kadoorie bequest, and especially to the proposal for the institution of an Agricultural College open to all sections of the local population. Further enquiry and discussions have revealed that whilst there is real, and in the case of the Arabs very urgent, need for the provision of practical education in agriculture, Jews and Arabs alike desire that the schools for this purpose shall be separate and they will not willingly participate in any institution common to both. I see no likelihood of any modification of their attitude and I am impressed with the desirability of reaching a final decision on the question of principle in order that arrangements for the establishment of two schools may be pushed forward at once. If you approve I suggest that a communication further to that enclosed with your predecessor's despatch No.1713 of the 5th of November, 1924, should now be made to the executors of the bequest, to the effect that Jewish local opinion, which is endorsed by the Palestine Zionist Executive, is in favour of the institution of an Agricultural instead of a Secondary School, that the Palestine Government are satisfied that additional facilities to those afforded by the Agricultural School at Mikveh Israel are required, and that local circumstances and sentiments are not favourable to a single school to serve the needs of both Arabs and Jews.

2. As soon as I am informed of the Executors decision in the matter I will address you regarding the appointment of certain officers as local representatives for the administration of the trust, which was the subject of your predecessor's despatch No.309 of the 9th of March.

3. In the meantime I forward for your information

- (a) a letter from the Director of Agriculture enclosing a note by the Director of the Mikveh Israel School, and

The Right Honourable L.C.M.S. AMERY, P.C., M.P.,
His Majesty's Principal Secretary of State
for the Colonies

- (b) a report by the Director of Agriculture summarising his proposals and quoting provisional financial estimates for an Agricultural School for Arabs at Tulkarem.

Mr. E.R. Saver is proceeding to England at once and will be available for discussion, as suggested in the final paragraph of his report, with the Ministry of Agriculture. As soon as he returns to Palestine I propose to appoint two small Committees, one for the Arab and one for the Jewish School, under his Chairmanship, to advise on the financial arrangements and the many subsidiary questions that will arise in connection with the establishment of these schools.

I have the honour to be,
etc.,

(sgd) Plumer F.M.

HIGH COMMISSIONER.

PALESTINE GOVERNMENT
1926-27

W3/9

January 28th, 1925.

Chairman,
Kadourie Hebrew School Committee.

Subject: Proposed Site - Talpioth.
Reference: Telephone message received
28.1.25.

You ask for my opinion on the proposed site on Talpioth Hill for a secondary school.

There would be no technical difficulties to building on that site and, if playing fields were provided apart, there would be ample space. The site is somewhat exposed but the buildings could be so disposed as to overcome such disadvantage. The position of the site in relation to the area from which the day pupils are likely to be drawn is a matter on which my opinion is presumably not required.

AUSTEN ST. R. HARRISON

ARCHITECT, P.W.D.

W.3/9.

37
January 9th, 1925.

Director of Education,

36
Subject:- Kadoorie Hebrew School.
Reference: Your 1951/PE of 5-1-25.

I have no objection to Mr. Harrison, Architect in this Department, giving any necessary assistance in a consultative capacity to your committee appointed in connection with the establishment of a Hebrew secondary school.

Mr. Harrison has been informed accordingly.

(Signed) H. B. LBES

DIRECTOR OF PUBLIC WORKS

Copy to Mr. Harrison.

All correspondence should be addressed to:
The Director of Education, Jerusalem.

Address: P. O. Box 404.
Telegrams: EDUCATION, JERUSALEM
Telephone: Lazzari Exchange (4 lines)



GOVERNMENT OF PALESTINE,
DEPARTMENT OF EDUCATION,
JERUSALEM.

5th January 1925.

In reply please quote
No. 1951/PE.

Director of Public Works.

Subject :- Kadoorie Hebrew School.

As you may be aware, I have been appointed by His Excellency the High Commissioner as chairman of a consultative committee to make recommendations to His Excellency on the establishment of a Hebrew secondary school, from half the proceeds of the Kadoorie bequest. The committee has already begun to function, and it has become apparent that it is necessary to invite from time to time the help of experts to advise the committee on plans and buildings. I should therefore be grateful if you would kindly agree to lend the committee the services of Mr. A.St.B.Harrison, Government Architect, in a consultative capacity.


Should you see your way to agree, I should be glad if you will inform me and Mr.Harrison accordingly.

H.L. Bowman

DIRECTOR OF EDUCATION.

HEB/DF.

REPLIED 737

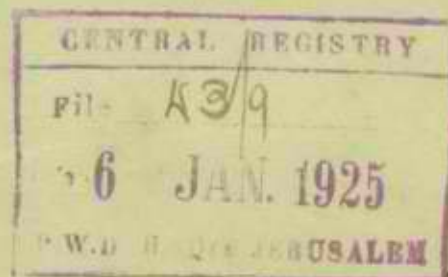

GOVERNMENT OF PALESTINE
DEPARTMENT OF EDUCATION
JERUSALEM



LIBRARY OF THE
JERUSALEM DISTRICT

12-10-1950

Card 1 of 2nd under:-
by
Entered in the Book by
Returned as "reply" by

All correspondence should be addressed to:
The Director of Education, Jerusalem.

Address: P. O. Box 404.
Telegrams: EDUCATION, JERUSALEM
Telephone: ~~Lazarist Exchange~~ (4 lines)

GOVERNMENT OF PALESTINE,
DEPARTMENT OF EDUCATION,
JERUSALEM.

In reply please quote

No. 1815/PE.

21st January 1924.

Mr. A. St. B. Harrison,
Department of Public Works,
Jerusalem.

File as 1815/PE.


Dear Mr. Harrison,

I am sending you a copy of the Report of the Departmental Committee on the Cost of School Buildings, and of the Buildings Regulations for Secondary Schools which I have just received from London. I hope that you may find the information of use to you in preparing draft plans for the Kadoorie School or Schools. As these are the only copies I have, I hope that you will not mind keeping them in your own hands, and returning them to me in due course.

Yours sincerely,

Humphrey Bowman

HEB/B. DH.



A

All correspondence should be addressed to:
The Director of Education, Jerusalem.

Address : P. O. Box 404.
Telegrams : EDUCATION, JERUSALEM
Telephone : Lazarist Exchange (4 lines)

34a

GOVERNMENT OF PALESTINE,
DEPARTMENT OF EDUCATION,
JERUSALEM.

In reply please quote
No. 1447/2/PE

16th March 1923.

A. St.B. Harrison Esq.,
Architect P.W.D.

31a

Subject :- Kadoorie Bequest.
Reference:- Your W 3/9 dated 14th inst.
addressed to Director of
Education.

The Director of Education is away at present and will not be back before next week, but your letter will be shown to him on his return. I may inform you, however, that no minutes of the last meeting of the Technical Sub-Committee have been issued because no business was transacted except the reading and adoption, after slight modification, of the Report, a copy of which was sent to you direct by Dr. Lurie.

file

A 157

SECRETARY
W 3/9
21 MAR 1923
P.W.D. H Qrs Jerusalem

Sublon

Secretary to the Committee.

Card Indexed under:

file
a 8/11

Covering notes to the programmes and estimates of the 3 school-
buildings proposed:

The Committee, appointed by H.E. The High Commissioner to deal with the Kadoorie Fund, in considering the needs of various schools was being guided by considerations of urgency of improvement in the present housing conditions, as well as by those of expansion of school population in each district and facilities ^{afforded} for building; namely sites placed at their disposal by the respective schools. The Committee has thus selected the following 3 schools for which buildings ~~shall~~ ^{should} be provided in the first place:

- 1) Secondary Mixed School (Gymnasia), Jerusalem;
- 2) Orthodox Elementary School "Tachkemoni" , Jaffa;
- 3) Elementary Mixed School, Tiberias.

1. The Secondary School, Jerusalem.

This school covers 6 years of study, coming after 6 years of elementary school. The present number of pupils is 143 (with 11 Teachers). However the school ^ere-established after the war, is growing rapidly, so that accommodation must be provided both for new pupils in each class and for ^{at} ^e least one parallel class.

The additional rooms, mentioned on the programme (science room etc.) are an essential feature of a secondary school and have been reduced on the programme B to the absolute minimum.

2. THE Elementary School, Jaffa.

The present number of pupils is 420, divided into 12 classes (8 years of study), with 13 Teachers. About 100 children had to be refused admission this year because of lack of accommodation. Even with the present numbers some of the classrooms are overcrowded.

- 2 -

3. Elementary School, Tiberias.

The present number of pupils is 203, divided into 8 classes (with 9 Teachers). In the new building more accommodation must be provided for the growing school population of Tiberias and an extra classroom is indispensable in view of the necessity in a mixed school to separate occasionally boys and girls for certain lessons (handwork etc.).

ESTIMATES

The estimates both of the area and space required for the schools and of the cost were worked out on the basis of strictest economy compatible with the requirements of school hygiene and efficiency.

In view however of the great number of schools in this country lacking suitable buildings and looking to the Kadoorie fund for help, the Committee has decided to reduce even further the cost of the 3 school-buildings under consideration. The Committee were unanimous in the opinion that this should be done not at the expense of the sanitary or educational quality of the rooms included in the programme, but rather by leaving out certain rooms which though highly desirable, are not absolutely essential. It is hoped that the plans shall be drawn up in such a way as to make it possible to add later to the building if and when funds are available.

The programme A represents the original plan, which, it is hoped, will be eventually completed, and the programme B - the finally reduced plan.

- 3 -

The Committee were anxious that the cheapest materials compatible with sound building shall be used; thus in Jaffa bricks will be chosen, bringing the expense down to about £E 6 per Sq. metre^{however,}. In Jerusalem, local conditions make it necessary to use ~~however~~ stone for public buildings and in Tiberias to ^{use} ferro-concrete, which bring the cost up to £E 8 and £E 7 per Sq. meter respectively.

JERUSALEM, SECONDARY SCHOOL

Programme A.

			<u>Each</u>	<u>Total</u>
	<i>about</i>			
(a)	2 Classrooms for ⁴² pupils	50	Sqm	100 m
(b)	5 " " ³⁴ "	40	"	200 "
(c)	1 Science Demonstration Room	45	"	45 "
(d)	2 " Store & Preparation Rooms	25	"	50 "
(e)	1 Scientific Laboratory (25 pupils)	60	"	60 "
(f)	1 Handwork Room	60	"	60 "
(g)	1 Gymnastic Hall	200	"	200 "
(h)	1 Gymnastic Dressing Room	25	"	25 "
(i)	Store for Drawing, Models etc.	20	"	20 "
(j)	1 Headmaster's Room	20	"	20 "
(k)	1 Secretary's Office	12	"	12 "
(l)	1 Porter's Room (Entrance)	8	"	8 "
(m)	1 Teacher's Room	40	"	40 "
(n)	Dispensary	20	"	20 "
(o)	Library & Reading Room	40	"	40 "
(p)	Store Room for Maps & Apparatus	25	"	25 "
(q)	2 Rooms & Kitchen for Caretaker	-		45 "
(r)	Lavatories			
(s)	Bathroom with Showers			
(t)	Dressing Room for Baths			
(u)	Entrance Hall			
(w)	Cloak-Room			

Programme B.

<u>Increase</u>	(f) Handwork Room
	(i) Store for Drawing Models etc.
	(k) Secretary's Office
	(l) Porter's Room
	(o) Library & Reading Room
<u>Reduce</u>	(q) Caretaker's Quarters from 5 to 2 Rooms

(Corresponding reduction corridorspace).

J A F F A , ELEMENTARY SCHOOL

Programme A.

		<u>Each</u>	<u>Total</u>
(a)	6 Classrooms for 50 boys	50 Sqs	300 m
(b)	4 " " 40 "	40 "	160 "
(c)	4 " " 30 "	30 "	120 "
(d)	1 Teacher's Room	40 "	40 "
(e)	1 Headmaster's Room	20 "	20 "
(f)	Dispensary	20 "	20 "
(g)	2 Handwork Rooms	50 "	100 "
(h)	Store Room for Apparatus & Maps	30 "	30 "
(i)	Library & Reading Room	50 "	50 "
(j)	Hall for 300 pupils	200 "	200 "
(k)	2 Rooms for Caretaker	15 "	30 "
(l)	Bath Room with Showers		
(m)	Lavatories		
(n)	Clock-Room		

Programme B.

- Reduce (g) Handwork Rooms from two to one.
Space (i) Library & Reading Room.
(j) Hall from 200m to 180m.
(Corresponding reduction corridorspace).

T I B E R I A S , E L E M E N T A R Y S C H O O L

Programme A.

		<u>Each</u>	<u>Total</u>
(a)	2 Classrooms for 50 pupils	50 Sqn	100m
(b)	4 " " 40 "	40 "	160"
(c)	3 " " 30 "	30 "	90 "
(d)	1 Teacher's Room	26 "	26"
(e)	1 Headmaster's Room	16 "	16"
(f)	1 School Equipment Room	26 "	26"
(g)	2 Rooms for caretaker	15 "	30"
(h)	1 Reserve Room	50 "	50"
(i)	1 Dispensary	20 "	20
(j)	1 Bathroom with Showers		
(k)	Lavatories		
(l)	Cloak Rooms		

Programme B.

Frage (h) Reserve Room

(Corresponding reduction corridorspace).

ESTIMATES

Programme A.

Programme B.

1. Jerusalem *£* 16,120
 2. Jaffa 9,590
 3. Tiberias 7,548

£ 14,760
 8,890
 7,151

Total 33,218
 Sanitation 1,200
 Contingencies 1,720

30,811
 1,200
 1,600

Grand Total

£ 36,136

£ 33,611

Minutes
of the meetings of the jury in the competition of
projects for the building of the Hebrew Secondary
School in Jerusalem.

File 324
asst

The following 11 projects have been submitted :

- No. 1. "4 squares." (*4 Vierecke*)
- " 2. "Adrichal".
- " 3. "Gradation" (*Steigerung*)
- " 4. "Mens sana in corpore sano est."
- " 5. "Simple"
- " 6. " *בשנת הבאה יבנה בית* ("Next year in Jerusalem.")
- " 7. "Mamilla"
- " 8. " *באגודת* ("Forward")
- " 9. "Form of the ~~site~~ *square*"
- " 10. " *הזקיה* ("Hezekiah")
- " 11. "Vega".

The jury held two meetings on February 13th and 15th 1923. The following took part: ~~Mr. Max Harker, (Civ. Eng.)~~ Mr. Holiday, (Civic Adviser, ~~represented by Mr. M. Heckler~~ in the latter's absence.) Mr. R. Kauffmann, Architect (representative of the J.N.F.) Dr. I. Lurie, (Director of Education) ~~Mr. S. Salant, Architect, (representative of the Jewish Technical Society, Jerusalem)~~ Prof. B. Schatz, (Manager of the Bezalel Art School.)

Mr. S. Weizmann opened the meeting in the name of the committee which had instituted the competition. On his proposal, Mr. Kauffmann was elected as chairman of the jury.

The chairman stated that the proceedings would be conducted in the manner adopted in international competitions. The question, whether anyone of the members had, in any way participated in (the working out of) any project or had been in any contact with the author, was answered by all the members of the jury in the negative. It was established, then, that all the projects had been submitted to time, except project No. 10, which had ~~not~~ been handed in, from Palestine only on December 7th 1922, i.e. three weeks after the prescribed date. This project was unanimously excluded from the competition.

The preliminary examination ^{had} confirmed, that all the projects complied with the requirements of the programme, with the exception of the projects No. 2, and 9, which provided for a three-storied building, while the programme expressly requires a two-storied one. It was established, however, that this was undoubtedly a misunderstanding on the part of both competitors. It has been made clear, by questioning two impartial Austrian Architects, that in Austria, even among architects, a two-storied building means a building containing groundfloor, first floor, and second floor.

Moreover, it is clear that the author of the project No. 9, considered his three-storied building as consisting of two stories only, as he stated in his explanatory report, ~~and~~ in respect of the future extension: a further 6 classroom will be built as a third floor.

The notation of the plans of the two projects "groundfloor", "1 floor", "2, floor" is a further support of this opinion.

In the case in question, however, the custom prevailing in the country in which the competition has been published, ought to be decisive. But as this custom is not yet fixed in this country and as it was clear from the above that the competitors had acted bona fide, it was resolved to admit the two projects to the competition.

THE FOLLOWING IS A SUMMARY OF THE INFORMATION RECEIVED FROM THE SOURCE:

1. The source is a high level official in the Department of Defense.

2. The source has been in contact with the subject for several months.

3. The source has provided the following information regarding the subject:

4. The subject is a high level official in the Department of Defense.

5. The subject has been in contact with the source for several months.

6. The source has provided the following information regarding the subject:

7. The subject is a high level official in the Department of Defense.

8. The subject has been in contact with the source for several months.

9. The source has provided the following information regarding the subject:

10. The subject is a high level official in the Department of Defense.

11. The subject has been in contact with the source for several months.

12. The source has provided the following information regarding the subject:

13. The subject is a high level official in the Department of Defense.

14. The subject has been in contact with the source for several months.

15. The source has provided the following information regarding the subject:

16. The subject is a high level official in the Department of Defense.

17. The subject has been in contact with the source for several months.

18. The source has provided the following information regarding the subject:

19. The subject is a high level official in the Department of Defense.

20. The subject has been in contact with the source for several months.

21. The source has provided the following information regarding the subject:

22. The subject is a high level official in the Department of Defense.

23. The subject has been in contact with the source for several months.

24. The source has provided the following information regarding the subject:

25. The subject is a high level official in the Department of Defense.

The project No. 2, had submitted two perspectives, one of which was excluded from criticism. The two perspectives of the project No. 3 were admitted, as one of them was an alternative to the main project.

Several authors have placed the W.C. inside the building, but it was decided to admit this arrangement, in view of the fact, that the W.C. were placed in most cases at the end of the wings, which was in no way disadvantageous.

The jury dealt with the various local conditions, which are of importance in the solution of the problem and in criticising the projects. The demand which had been expressed in the programme of the competition, that with regard to ventilation and light, the axis of the main building be laid in the south-north direction, was considered as being of special importance.

In addition, the following points were agreed upon as important in criticism of the projects: in the situation of the buildings from the town-planning point of view, in relation to the streets, the site, and the aspect from the town. As regards the horizontal plan, the clear division into the main parts, their accessibility and advantageous subdivision are of importance. In view of the limited means at disposal, stress was laid on the necessity that the cube of the building should be as small as possible and that any superfluous expense be avoided.

The proceedings were carried on in the usual way. In the first examination the project No. 5, was eliminated, owing to grave defaults and defects, against the main points of view.

In a second examination the projects No. 1, 7, 8, were eliminated.

In the third examination the project No. 11 ~~was eliminated~~ then remained for the closer examination, was eliminated. Projects No. 2, ("Adrichal"), No. 3 ("Gradation") No. 4, ("Mens sana in corpore sano est") No. 6, ("Next year in Jerusalem") No. 9, ("Formation of the site") then remained for the closer examination.

These projects were criticised by the jury as follows:

No. 2. "Adrichal". The situation according to the cardinal points is advantageous in general. The horizontal plan is suitable. The entrance hall not quite advantageous, classrooms rather wide. The defects are the poor communications between the corridors of the two wings and the narrowness of the staircase. The impression made by the building from afar, that is as viewed from the town, is rather hard and inorganic, without successful linking up with the existing monumental buildings of Ratisbon and Bezael, which were shown in the photograph. The architecture by no means justifies the opinion expressed in the explanatory report according to which it is "a measure, a first sample of Jewish Renaissance Architecture." The cube of the building is too large.

No. 3. "Gradation." The general intention of this project is lofty but the architectural form does not seem to suit a school - building. The solution of the general arrangement is considered good. The situation according to wind directions is advantageous, the arrangement of open spaces good and practical, only the main axis of the playground ought to be directed from south to north, in order that the teams playing in the forenoon and the afternoon should receive only side light. The solution of the horizontal plan is advantageous in general, the defect ~~is~~ is that no attention has been paid to the communication by means of a corridor between the main wing of the school and the gymnastic hall and pharmacy. The main entrance has been well arranged, the vestibule is in size rather extravagant. The cube of the building is suitable. The alternative with the flat

roof on the hall-wing is to be preferred to the main solution with the cupola. Special attention is to be called ~~to~~ to the advantageous division of masses and the nice silhouette of the building as viewed from the ~~appearance~~ town, also the gradation towards the monumental buildings adjoining on the north side..

No. 4, "Mens sana in corpore sans est." In this project the careful elaboration deserves to be mentioned, but the accentuation of an axis of symmetry does not seem to suit the present case. The situation of the main parts of the building is advantageous with the exception of the gymnastic hall, which lies in the direction of E-to W and therefore cannot be easily ventilated.

The horizontal plan is clear in its main lines. The access and entrance to the hall and gymnasium is defective from ~~the~~ outside. ~~The~~ The divisions ~~of~~ the school building is very clear, only the corridors are too narrow. The architecture is unsatisfactory from the artistic point of view. The possibilities of future extension are not sufficient and defective.

No. 6, "Next year in Jerusalem". In this project the arrangement of a western school-wing is deemed a disadvantage, as this wing cuts the whole plot and gives rise to many drawbacks in the details, too. The arguments alleged by the author in his explanatory report, which induced him to make this arrangement, do not hold good. Apart from this, the solution is plausible in general, both in respect of the horizontal plan and the architecture. The situation according to the wind-directions and from the town-planning point of view is advantageous. As regards the arrangement of open spaces the east-west direction of the axis of the playground is considered faulty (arguments as in the judgment of the project No. 3.) The horizontal plan has been well solved, only the arrangement of the above mentioned western school-wing causes some shortcomings. The architecture suits well the purpose, being carried out in quiet and attractive form. With regard to the impression produced from afar and also from proximity a heightening of the elevation of the corner should be recommended.

No. 9, "Formation of the ^{square} site". In this project the situation of the buildings and of the playground is deemed particularly fortunate. The author has placed the physical training section east of the school building, on the corridor-side of the house between the building and the street, rightly intending that the noise of gymnastics should not disturb the lessons. The form of the open space between the gymnastic hall and the entrance is also praiseworthy. The accessibility and the whole arrangement of the horizontal plan are likewise very advantageously and clearly solved. The northern wing of the building should be removed from the streets, so as to allow space for a garden there. Thus the possibility of a right-angled turning of this wing ~~in~~ would result of itself, instead of the disadvantageous oblique-angled position. The disposition of the drawing-room, hall, and gymnastic hall within the additional wing is deemed not fortunate, because it allows too small a height for the above mentioned rooms, having regard to the effect of the whole mass of the building. The grouping of the masses is very attractive, not so the management of the detailed architecture.

The sequence of the projects which have entered the closer examination was then fixed as follows:

1. Project No. 6. "Next year in Jerusalem".
2. " " 3. "Gradation".
3. " " 9. "Formation of the ^{square} site".
4. " " 4. "Adrichal".
5. " " 5. "Mens sana in corpore sans est."

The jury was unanimously of the opinion, that none of the

1. The first part of the document discusses the importance of maintaining accurate records of all transactions. It emphasizes that this is essential for the proper management of the organization's finances and for ensuring transparency in all dealings.

2. The second part of the document outlines the specific procedures for recording transactions. It details the steps that must be followed, from the initial receipt of funds to the final entry in the accounting system. It also discusses the importance of double-checking all entries to ensure accuracy.

3. The third part of the document addresses the issue of reconciling the organization's records with those of the external banks. It explains how this process is carried out and why it is a critical component of the financial management process.

4. The fourth part of the document discusses the role of the accounting department in providing information to management. It explains how the department uses its records to analyze the organization's financial performance and to identify areas for improvement. It also discusses the importance of providing timely and accurate information to management for decision-making.

5. The fifth part of the document discusses the importance of maintaining proper documentation of all financial transactions. It explains that this is not only a legal requirement but also a key factor in ensuring the reliability of the organization's financial records. It also discusses the importance of keeping records for a sufficient period of time to allow for future audits.

6. The sixth part of the document discusses the importance of training staff in proper financial management practices. It explains that all staff members, not just those in the accounting department, have a role to play in ensuring the accuracy of the organization's financial records. It also discusses the importance of providing ongoing training and support to staff to ensure they are up-to-date on the latest financial management practices.

7. The seventh part of the document discusses the importance of regular audits of the organization's financial records. It explains that audits are a critical component of the financial management process as they help to identify any errors or irregularities in the records. It also discusses the importance of selecting an independent auditor to carry out the audit.

8. The eighth part of the document discusses the importance of maintaining a strong relationship with the external auditors. It explains that this is essential for ensuring the accuracy and reliability of the organization's financial records. It also discusses the importance of providing the auditors with all the information they need to carry out their duties effectively.

9. The ninth part of the document discusses the importance of maintaining a strong internal control system. It explains that this is essential for ensuring the accuracy and reliability of the organization's financial records. It also discusses the importance of regularly reviewing and updating the internal control system to reflect changes in the organization's operations.

10. The tenth part of the document discusses the importance of maintaining a strong ethical culture within the organization. It explains that this is essential for ensuring the accuracy and reliability of the organization's financial records. It also discusses the importance of providing training and support to staff to ensure they understand the organization's ethical standards and are able to uphold them in all their dealings.

projects submitted had solved the problem entirely satisfactorily. It was therefore decided not to confer a first prize. The jury availed itself of the right to distribute the fixed amount in another manner and decided to grant an increased second prize of LE. 45, an increased third prize of LE. 35 and two fourth prizes of LE. 20 each.

The jury also decided not to avail itself of the right to pay half the amount only to competitors living in countries of low ~~ext~~ rate of exchange, taking into consideration the rise in the cost of living, which ~~once~~ ^{has since} taken place in those countries, and because of ~~other circumstances~~ ^{other considerations}.

The final distribution of prizes was decided as follows:

An increased second prize - LE. 45 -	project No. 6 "Next year in Jam.
" " third " - " 35 -	" " 3 "Gradation."
A fourth " - " 20 -	" " 9 "Formation of the site."
" " " - " 20 -	" " 2 "Adrichal."

No purchase of any additional projects was recommended.

After opening of the motto-envelopes the authors proved to be:

Project No. 6 "Next year in Jerusalem" -	Alex Baewald, Architect,	Berlin-Dahlem, Takustr. 3.
" " 3 "Gradation" -	F. Kornberg, Eng. Architect,	Jerusalem.
" " 9 "Form of the site" -	H. Sobelsohn, Eng. Architect,	Vienna 3, Rechte Behngasse 12. (Austria)
" " 2 "Adrichal" -	J. Awin, Eng. Architect,	Lemberg, Ochonek 6 (Poland)

The project No. 6, "Next year in Jerusalem", by Arch. A. Baewald, was recommended for execution after recasting ^{taking} the defects mentioned in the judgment into consideration.

~~The jury,~~

...the ... of ...
...the ... of ...
...the ... of ...

...the ... of ...
...the ... of ...
...the ... of ...

...the ... of ...
...the ... of ...
...the ... of ...

...the ... of ...
...the ... of ...
...the ... of ...

...the ... of ...
...the ... of ...
...the ... of ...

...the ... of ...
...the ... of ...
...the ... of ...

...the ... of ...
...the ... of ...
...the ... of ...

...the ... of ...
...the ... of ...
...the ... of ...

...the ... of ...
...the ... of ...
...the ... of ...

...the ... of ...
...the ... of ...
...the ... of ...

...the ... of ...
...the ... of ...
...the ... of ...

...the ... of ...
...the ... of ...
...the ... of ...

...the ... of ...
...the ... of ...
...the ... of ...

...the ... of ...
...the ... of ...
...the ... of ...

$\frac{3}{a}$

23/9

March 14th, 1923.

Director of Education.

Kadoorie Bequest Schools.

May I please be furnished with a copy of the minutes of the last meeting of the Kadoorie Bequest Technical Sub Committee.

ARCHITECT P.W.D.

AH/D.

30a
W.B./9

Minutes of the 4th meeting of the Technical Sub-Committee,
Kadoorie Bequest, held on Friday 23rd February 1923.

Present:- Mr. H.E. Bowman (in the chair), Mr. A. Harrison,
Dr. J.A. Henderson, Mr. S. Ginsberg, Dr. J. Lurie,
Mr. R. Kaufmann, Dr. M. Boruchov.

Mr. Bowman asked the meeting to consider the request of the main committee to reduce the estimates to within the limits of ££.30,000 and ££.35,000.

Dr. Lurie thought that it would be better to leave the estimates as they were, but to effect economies when the building operations are carried out.

Mr. Harrison observed that the estimates could be reduced if the cost of labour were cheaper.

Mr. Bowman stated that he had been informed by Mr. Shebar, the architect who built the hostel for the British High School for Girls, that the cost per square metre in that building was between ££.10 and ££.11, and that he thought that the estimated price of ££.8 per metre, as recommended by the committee, was inadequate.

Mr. Kaufmann quoted the figures he had obtained from the Jewish Workmen's Association for stone and brick building respectively, and stated that the figure of ££.8 was an average which should hold good for a building the outer walls of which were of stone and the inner walls of brick.

Mr. Harrison agreed that the figure of ££.8 per square metre could not be reduced.

Mr. Ginsberg suggested that the 5% contingencies added at the end of each estimate be cut out.

Mr. Harrison objected that this was impossible, and recommended that the programmes be revised if economies were contemplated.

Mr. Ginsberg then inquired whether the Gymnasial Committee would not be prepared to contribute towards the cost of construction.

Dr. Lurie replied that, although that might be possible in time, it would not be wise to base calculations on that assumption.

Mr. Bowman proposed that the programmes be revised in such a way as to allow of the rooms that could be dispensed with being left out at present and added afterwards if and when more funds were forthcoming. Thus there would be two sets of estimates, one showing the complete programme, and the other the alternative and reduced programmes.

The committee then discussed in detail the three estimates and agreed on the following items being cut out of the previous alternative "B" scheme :-

Jerusalem school

- ✓ item (f) 60 sq. metres,
- o item (g) already cut out in preparing the estimates,
- ✓ item (k) 20 sq. metres,
- ✓ item (m) 12 sq. metres,
- ✓ item (n) 8 sq. metres,
- ✓ item (q) 40 sq. metres,
- item (s) reduced by 15 sq. metres,
- 10% on corridors. Total ££.1400.

Tiberias school

- item (h) 50 sq. metres,
- 10% on corridors. Total ££.400.

Jaffa school

- ✓ item (g) one room only, 50 sq. metres,
- ✓ item (i) 50 sq. metres,
- item (l) reduced by 20 sq. metres,
- 10% on corridors, Total ££.700.

Thus the estimates were reduced by ££.2,500, to ££.33,636.

It was decided, on Mr. Bowman's proposal, to ask that the full programmes should be carried out if and when sufficient funds are available, and that in the meantime the reduced programmes should be put in hand. The full (originally "B") and reduced programmes would be called "A" and "B" respectively.

Dr. Henderson asked that in the programmes the number of pupils allotted to each classroom should be given as approximately true only.

It was further decided that Messrs. Harrison and Kaufmann would draw up detailed estimates and transmit them to Dr. Lurie who, in conjunction with Mr. Ginsberg, would draw up a memorandum on the principles underlying the decisions of the sub-committee. The report as a whole would be considered and definitely approved at the next meeting, and forwarded to the Attorney General, to be sent to the Colonial Office. X

The next meeting was fixed for Tuesday, 27th February 1923, at 11 a.m.

23.2.23.


Secretary.

+ Eliminated Feb/23/23

29a

Details of floor-space requirements of the three schools in question.

1. The Mixed School at Liberia.

a. 2 classrooms for 50 pupils,	50 sq. metres each.
b. 4 do for 40 do	40 do do
c. 3 do for 30 do	30 do do
d. 1 teachers' room	25 do
e. 1 headmaster's room	16 do
f. 1 room for school equipment	25 do
g. 2 rooms for Kiosks <i>15 each</i>	30 do do
1. x h. 1 reserve room	50 do
i. 1 hall for 300 persons, gymnastics, etc.	200 do
j. 1 room for nurse and dispensary	20 do
k. 1 bathroom and spray for 30 pupils, may be in basement	
l. Corridors, stairs, and lavatories	
m. Cloak rooms for (? 300) pupils.	
n. Drinking water and general water supply.	

2. The Mixed Secondary School at Jerusalem.

a. 2 classrooms for 42 pupils	50 sq. metres each
b. 5 classrooms for 34 pupils	40 do do
c. 1 demonstration room for science	45 do
d. 2 rooms for storing apparatus and for preparation by demonstrators	25 do do
e. 1 scientific laboratory, to hold 25 pupils at a time	60 do
1) x f. 1 room for handwork for boys	60 do
g. 1 do do for girls	40 do
h. 1 gymnastic hall	200 do
i. 1 dressing room adjoining (h)	25 do
j. 1 hall to be used for dancing, singing, entertainments, etc.	200 do
2) x k. 1 room adjoining (j) for storing models, drawing apparatus, etc.	20 do
l. 1 principal's room	20 do
3) x m. 1 secretary's room	12 do
4) x n. 1 caretaker's room, close to entrance	8 do
o. 1 teachers' room	40 do
p. 1 surgery and dispensary	20 do
5) x q. 1 library and reading room	40 do
r. 1 room for apparatus, maps, etc.	25 do
15/6 x s. caretaker's quarters: 2 rooms and a kitchen	30 do
t. 2 store rooms	
u. lavatories for boys	
v. do for girls	
w. do for teaching staff	
x. shower baths for (?) pupils	
y. dressing room adjoining (x)	
z. stairs, hall, and corridors	
za. cloak rooms	
zb. drinking water facilities, etc.	

1400
400
200
\$2500
Grand total
\$33636

1400

X eliminated

3. The Tehkimon School for Boys at Jaffa.

+ 6	a. X classrooms for 50 boys	50 sq. metres each	
	b. 8 do for 40 do	40 do do	
+ 4	c. 4 do for 30 do	30 do do	
	d. 1 teachers' room	40 do	
	e. 1 headmaster's room	20 do	
	f. 1 room for nurse and dispensary	20 do	
1	X g. X rooms for hand-work	20 do	do
	h. 1 room for apparatus, maps, etc.	30 do	
X	i. 1 reading room and library	50 do	
	j. 1 bathroom and spray for boys		
	k. 2 caretaker's rooms 15 each	30 do	do
#	l. 1 hall for 300 pupils, gymnastics, etc.	200 do	do with a room for synagogue
	m. corridors, stairs, etc.		
	n. lavatories		
	o. cloak rooms		
	p. drinking water facilities		

~~2 q. 1 synagogue for 300 pupils~~

£700


3

Red

50
50
100
10
110
5
550
140
690

100
40
50
50
40

100
50
50
50
280
300
5
1400
140
140

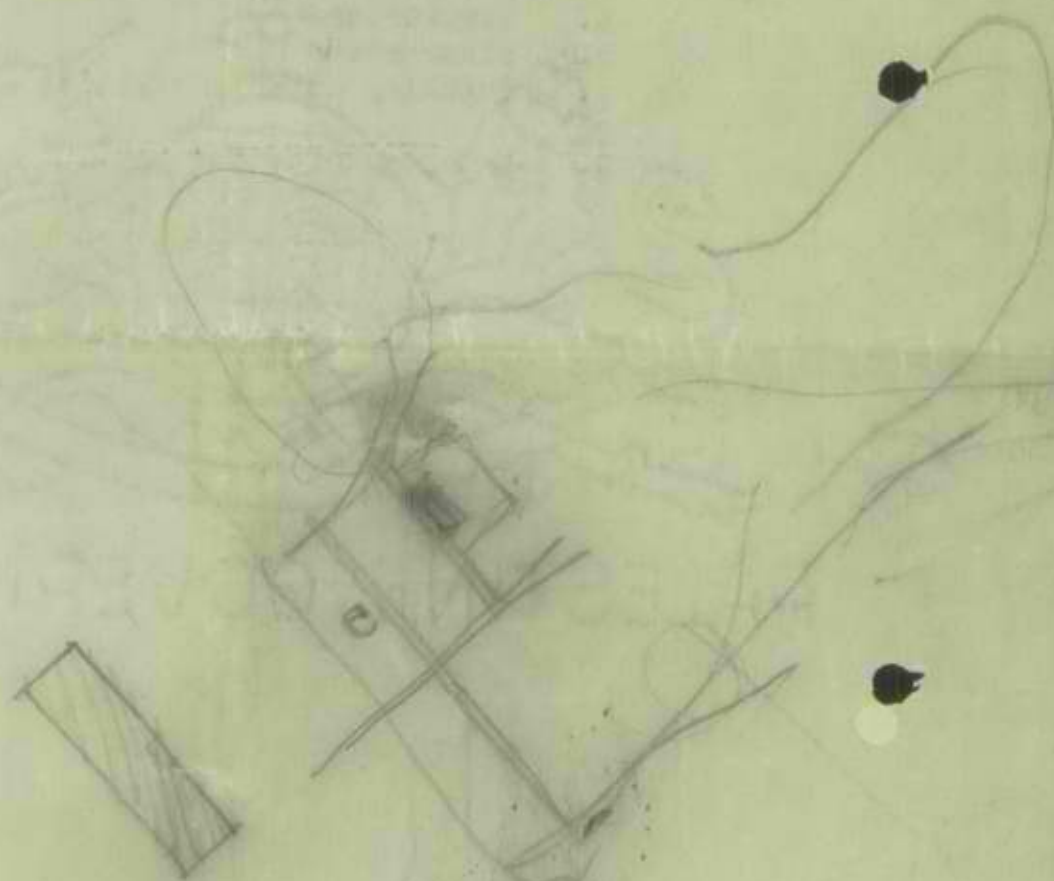

All correspondence should be addressed to:
The Director of Education, Jerusalem

Address: P.O. Box 404.

Telegrams: "EDUCATION, JERUSALEM"

Telephone: Lazarist Exchange (4 lines)



28a
GOVERNMENT OF PALESTINE,

DEPARTMENT OF EDUCATION,

JERUSALEM.

In reply please quote

No. 1447/2/PE

18th February 1923.

Sir,

I have the honour to inform you that the meeting of the Technical Sub-Committee which should have taken place on the 16th instant will be held on Friday next, the 23rd instant, at 9 a.m., in the office of the Director of Education.

I have the honour to be,

Sir,

Your obedient servant,

CENTRAL REGISTRY
File W 24/21
Date 20 FEB. 1923
W 3/9
Jerusalem

File as per

[Signature]
Secretary to
Sub-Committee.

A. Harrison Esq.,
Public Works Department,
Jerusalem.

GOVERNMENT OF PAKISTANE
DEPARTMENT OF EDUCATION
RAWALPIND



Card Indexed under:-
by
Entered: in Book by
Entered as "reply" by

REGISTER
13 FEB 1953

Handwritten signature

A

27a


Mr Bloom of the Education
 Deptnt telephoned saying that
 the Kadavrie Schools Committee
 Meeting which should be held
 to morrow is cancelled on account
 of the death of Mrs Bowman.

• You will be notified of the
 day & hour the meeting takes
 place.

Wes
 14.2.23

W 3/9

File
 1913H

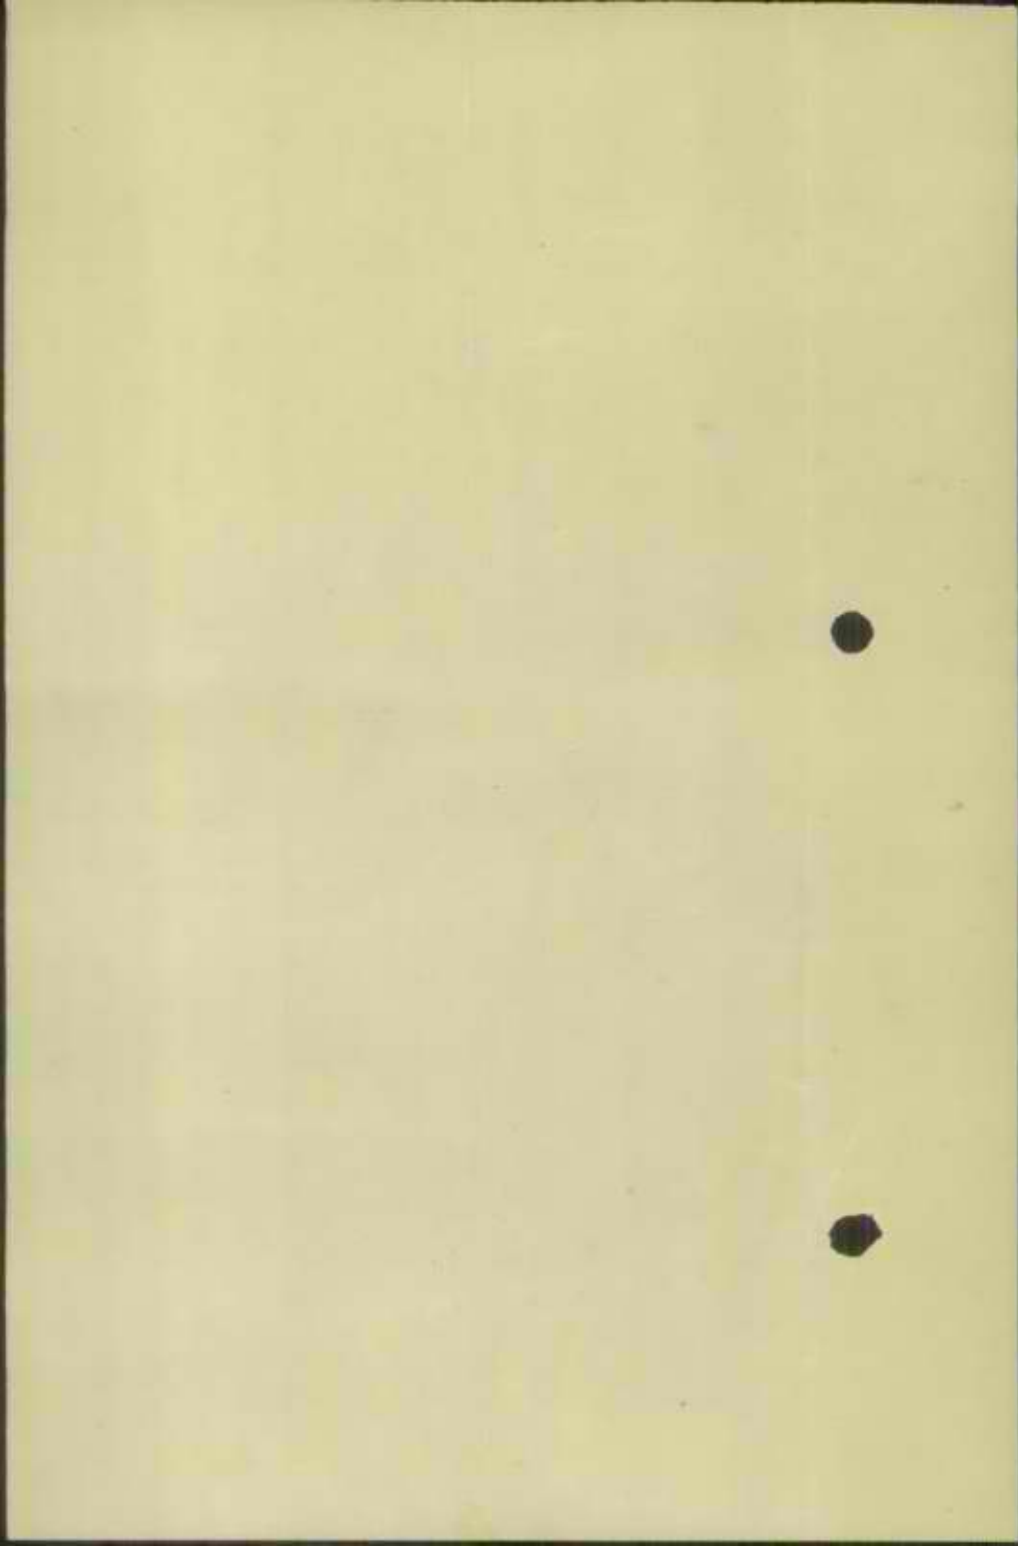

26a

All correspondence should be addressed to:
The Director of Education, Jerusalem.

Address: P. O. Box 404.

Telegram: EDUCATION, JERUSALEM.

Telephone: Lazarist Exchange (3 lines).

GOVERNMENT OF PALESTINE.

DEPARTMENT OF EDUCATION,
JERUSALEM

In reply please quote

No. 1447/2/PE

11th February 1923.

Sir,

I have the honour to inform you that a meeting of the Technical Sub-Committee will be held on Friday, the 16th instant, at 9 a.m., at the above address.

At the meeting of the Main Committee held on the 9th instant, it was decided to refer back the programmes and estimates of the three schools to the Sub-Committee, with the recommendation to revise them so that they should come within the limits of £E.35,000 and £E.30,000, as maximum and minimum respectively allowances allowed to be spent on these schools. The programmes and estimates thus revised will be forwarded to the Colonial Office without further reference to the Main Committee.

A resolution has also been passed by the Main Committee to ask the Sub-Committee, when drawing up the plan of the Tahkimoni School in Jaffa, to arrange the hall in such a way as to allow, by means of a suitably placed movable partition, of its being used also as a synagogue for the pupils.

I have the honour to be,
Sir,

Your obedient servant,


Secretary.

A. Harrison Esq.,
Public Works Department,
Jerusalem.

File
as per


25
February 9th 1923.

Director
of Education,

Herewith 6 copies of
Provisional & Approximate Esti-
mates for Kadoorie Bequests
Schools.

ARCHITECT P.W.D.

AH/S.

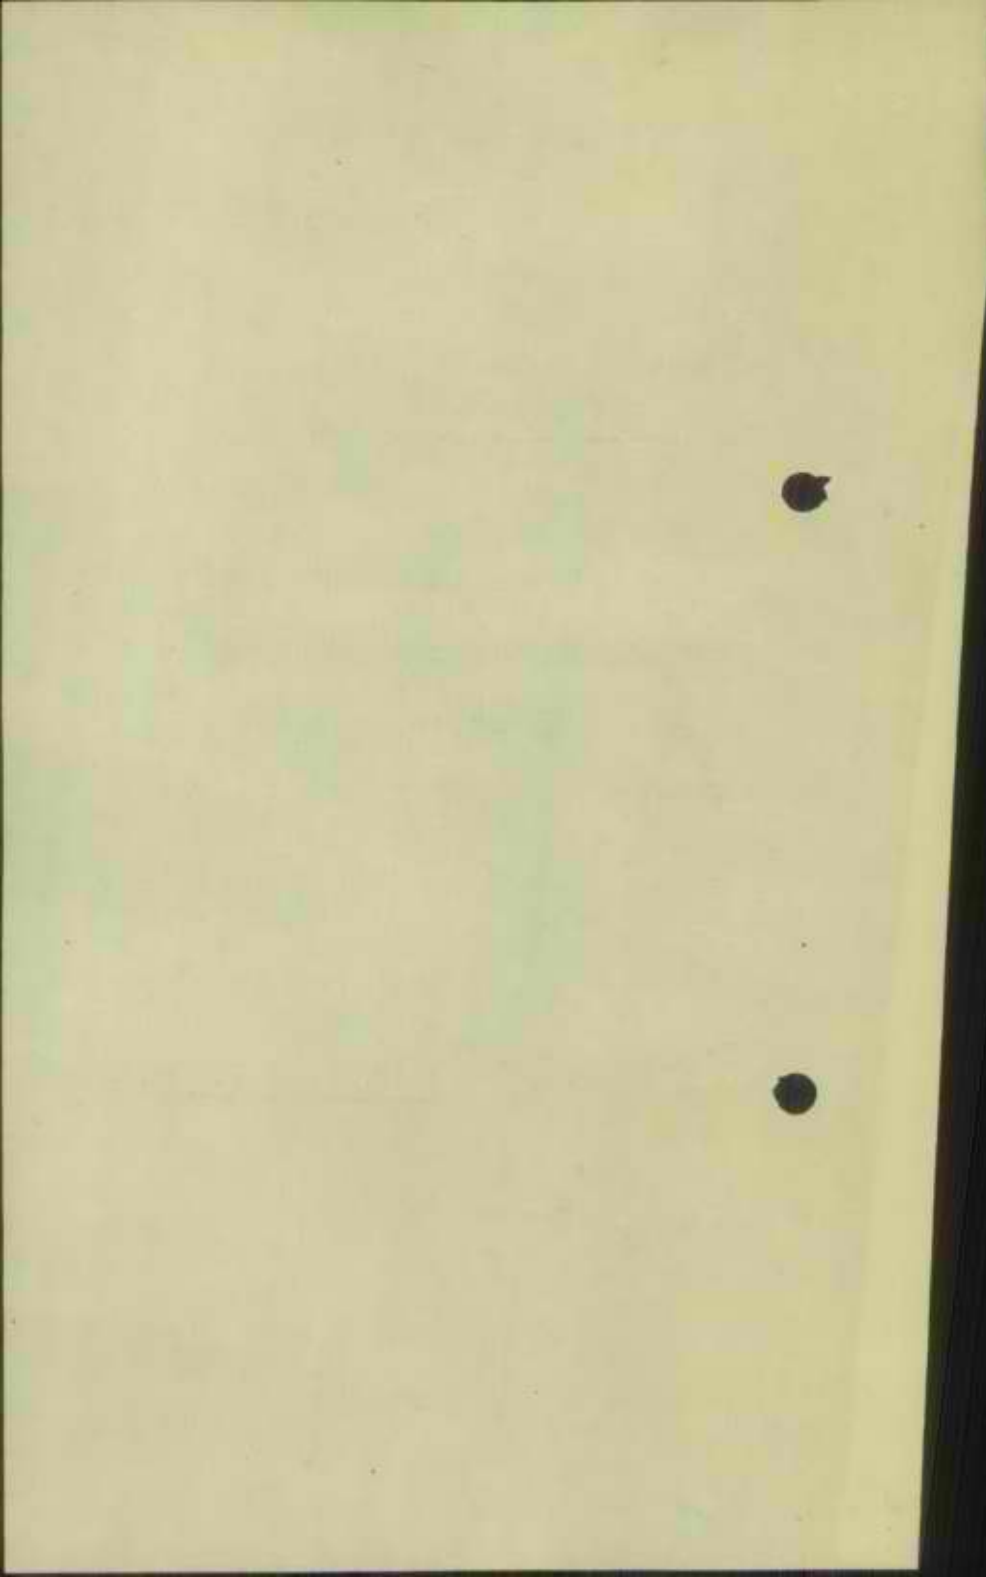

Hi,

24-

Please see
to 22a & 21a
re letter you
mentioned yester-
day.

Cur

13.2.23

Noted file *AM*

~~A~~

~~Dkw states that
you showed him
a copy of a letter
from the H.C. to.~~

~~his John Shuckburgh;
which should be filed
in this file. —~~

Will you please
produce the
letter.

Ans

12.2.23

Minutes of the 3rd meeting of the Technical
Sub-Committee of the Madecoris Bequest
Committee.

Thursday, 8th February 1923, 9.20 a.m.

23a

Present:- Mr. H.B. Bowman (in the chair), Dr. M. Bernuchov,
Mr. A. Harrison, Dr. J.A. Henderson, Mr. R.
Kaufmann, and Dr. J. Lurie.

Mr. Harrison explained that his position on the Sub-Committee had now been made clear, as General Grant consented to his serving on it. General Grant wished, however, to know how the work would eventually be carried out after the plans had been approved and passed.

Mr. Bowman proceeded to read a copy of a letter which H.B. the High Commissioner wrote to Sir John Shuckburgh on the 26th January 1923, bearing on many of the points which General Grant wanted to clear up.

Mr. Harrison remarked that the sum of ££.30,000 mentioned in the letter as representing the estimated cost of the three schools in question was much below the estimates worked out by himself and Mr. Kaufmann, which amounted to ££.42,000. He urged that the experts should know either what the cost of the buildings was to be, and then they would arrange their programmes accordingly, or else they should be given the programme, and then they would be able to make estimates of the cost accordingly.

Mr. Bowman thereupon telephoned to Mr. Bentwich, and reported to the meeting that the latter had said that the experts were not bound by the sum mentioned in the letter, but that they were to keep in mind the necessity for economy owing to the fact that many applications were being received for grants from the fund.

Dr. Lurie then stated that it might be possible, by reducing the programme of the schools to the minimum, to reduce the estimates by ££.5,000 to ££.7,000.

/from/

Mr. Harrison suggested that the experts should submit two sets of estimates, one set as already worked out, and the other reduced after embodying the eliminations to be recommended by Dr. Lurie. These two estimates would be ready to be submitted to the Main Committee at their meeting on the 9th February.

Dr. Lurie remarked that reductions in cost might be effected in two ways, by reducing the floor space, and by reducing the height of the rooms. As regards the first, he suggested the following:-

The Tiberias School: to cut out (i) the hall of 200 sq. metres.

The Jerusalem School: to cut out (h) the gymnastic hall of 200 sq. metres.

The Jaffa School: to reduce (a) and (b) by two rooms each, amounting to 100 sq. metres.

J. Lurie

C.C.
BF next Monday
for interview with
HC Phil
9/2

for H. Bentwich

12.2.23

The question of reducing the height of the rooms was fully discussed. Dr. Lurie and Dr. Boruchov were in favour of reducing the height to 4 metres, the first on account of the difficulty teachers would experience when lecturing in high rooms, and the second on account of the danger of having an accumulation of hot and impure air in the upper parts of the rooms. Mr. Harrison and Mr. Kaufmann, on the other hand, were of the opinion that the height should not be less than 4.50 metres, and that ventilating windows should be constructed near the ceiling in such a way as to remove the bad air. Dr. Henderson expressed himself in accord with Dr. Boruchov as regards the danger of bad air accumulating near the ceiling, but thought that the precautions advised by the architects would meet the case.

In view of the fact that Messrs. Harrison and Kaufmann observed that the reduction in height would not materially affect the cost, it was decided to leave this question open for the time being.

Mr. Harrison submitted the report on the Jaffa site, and observed that he had not signed it because of the proviso that was inserted concerning the area of playing ground required per pupil.

Dr. Henderson remarked that the figures on which the proviso had been based were being revised in the light of the provisions laid down by the Board of Education in England, and that he would therefore alter them in the report, and send the report to Mr. Harrison for signature.

Dr. Henderson then asked that the word "merely" in page 2, line 12 from top, of the minute of the last meeting should be erased, and that the word "would" in line 14 of the same page should read "might".

Mr. Harrison also remarked that the last section of para 3, for "question of lighting and ventilation both natural and artificial", should read "question of artificial lighting and heating".

8th February 1923.

Secretary to Sub-Committee.

2200
All correspondence should be addressed to:
The Director of Education, Jerusalem

Address: P. O. Box 404.

Telegrams: "EDUCATION, JERUSALEM"

Telephone: Lazarist Exchange (4 lines)

GOVERNMENT OF PALESTINE,

DEPARTMENT OF EDUCATION,

JERUSALEM.



In reply please quote

No. 1447/21 PE.

9th February 1923.

A. Harrison Esq.,
Public Works Department,
Jerusalem.

Sir,

I have the honour to forward
herewith an extract from a letter sent by
H.E. the High Commissioner to Sir
John Shuckburgh, of the Colonial Office,
on the 26th January 1923, dealing with
the Kadoorie Bequest.

I have the honour to be,

Sir,

Your obedient servant,

SECRETARY TO SUB-COMMITTEE.

JLB/DH.

CENTRAL RECORDS

File

23/9

Date

11. FEB. 1923

P W D H Qrs Jerusalem

DEPARTMENT OF PALATINE
DEPARTMENT OF EDUCATION
RECEIVED



Card Indexed under:
by
date of
reference

EXTRACT FROM A LETTER DATED 26th JANUARY
FROM THE HIGH COMMISSIONER TO SIR JOHN
SHUKBURGH.

21a

It would appear from Mr. Kaddoorie's letter of the 9th of June addressed to me when I was in London (which is referred to in your despatch No. 630 of the 22nd June) that the trustees have placed a sum of money representing an instalment of the legacy on deposit with the Jewish Colonial Trust in London, which sum can be drawn upon for purposes of building schools as soon as the trustees are satisfied that a scheme is approved by the British Government. They have made it a condition that the work of construction should be done by Jewish labour; and in my opinion, the functions of the Palestine Government should be to supervise the plans and see that the money is well expended, but not itself to carry out the work through the Public Works Department. The Committee constituted by me, as reported in my last letter to you, has appointed a technical sub-committee consisting of three Government members and three non-Official Jewish members. The three Government members consist of representatives of the Public Works, Public Health and Education Departments, and they will consider the plans that have already been prepared for the three schools which it is proposed immediately to construct. It will be the functions of these members of the Sub-Committee to see that the plans comply with the proper requirements of the Government for school buildings, that the price to be paid for the work is reasonable, and that the work is properly carried out; but it is suggested that the detailed direction of the work should be left to the Jewish bodies concerned.

I understood from Mr. Kaddoorie that the trustees are anxious for the building to proceed as soon as possible; and I shall send you shortly the recommendations of the Committee in regard to the three schools with which it is proposed to start. It is estimated that the cost of these three schools will be about £E 30,000; and it is understood that at least that sum is immediately available. If you approve of the procedure proposed above, I would suggest that you should so inform the trustees of the will, and request them to give instructions for the fund deposited by them with the Jewish Colonial Trust to be made available forthwith for the buildings in Palestine.

All correspondence should be addressed to:
The Director of Education, Jerusalem.

Address : P. O. Box 404.

Telegrams : EDUCATION, JERUSALEM.

Telephone : Lazarist Exchange (3 lines).



DEPARTMENT OF EDUCATION,
JERUSALEM

In reply please quote

No. 1447/2/PE

2nd February 1923.

Sir,


I have the honour to inform you that the next meeting of the Technical Sub-Committee of the Kadoorie Bequest Main Committee will be held in the office of the Director of Education on Wednesday, the 7th of February 1923, at 9 a.m.

The report of the Sub-Committee on the three schools in question will be considered at this meeting, and it is hoped that you will be able to attend at the place and time mentioned.

I have the honour to be,

Sir,

Your obedient servant,

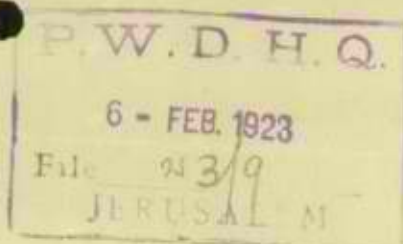

Secretary to Sub-Committee.

A. Harrison Esq.,
Public Works Department,
Jerusalem.

File

Card Indexed under:

by

Entered: in the Book by

Entered as "copy" by

THE PALESTINE LAND DEVELOPMENT Co. Ltd.

LONDON—JERUSALEM

חברת הפיתוח בארץ ישראל, בע"מ.

לונדון—ירושלם

20B

Jerusalem, February 2nd, 1923. ירושלם, ת.ד. 456

P.O.B. 456

ת.ד. 456

במשלוח (א) לכתוב
In reply please quote:

Ne

A. St.B.Harrison, Esq.,
Public Works Department,
Jerusalem.

Dear Mr. Harrison,

In reference to our conversation of this morning I should like to give you some points regarding our estimate in connection with the three schools.

Perhaps it would be advisable in order to facilitate the comparison of the two estimates to introduce the same or similar points in yours, and also to suggest others that may occur to you that I have not mentioned.

I wish to take into consideration:

1. The area in sq. metres,
2. The number of stories,
3. The construction (including also some details regarding the thickness of the walls),
4. The different building materials,
5. If and how much cellar space is included,
6. Prices for: a) the cheapest manner of construction (in regard to the utmost allowed for construction and the simplest treatment of the building material)

b) medium manner,

c) best manner.

I shall be glad to hear from you at my house some time today. *because I am not in this office today and tomorrow.*

Thanking you in anticipation,

Yours sincerely,

M. S. Kaufmann

A

Stu wishes you
to please pass on
Filing his written
pencil instructions
to you re attendance
at Kadoorie Befuery,
School Construction
Committee. —

Bus

30/1/23 —

CC

Here with
agmt

File in
W3/9

Bus

1-2-23

PALESTINE NEWS.

THE KADOORIE BEQUEST.

Under the terms of the will of the late Sir Ellis Kadoorie, the well known philanthropist, a legacy which will amount to about £.100,000 was left to the British Government for the erection of schools in Palestine and Mesopotamia. The British Government and the Trustees have decided that the bequest shall be devoted to the erection of Jewish schools in Palestine and a committee has been appointed consisting of:

Mr. Bentwich, Mr. Bowman, Mr Ginsberg as Government Representatives; and Dr. Lurie Mr. Ussishkin and Mr. Lifshitz (Representing the "Mizrahi" as non-official representatives to discuss and formulate plans for its disposal.

At the first meeting of this Committee held recently it was decided that such of the legacy as would be available this year should be devoted entirely to the erection of schools. The schools to be built should be (in order of priority) the Gymnasium in Jerusalem, the Tachkemoni in Jaffa and the Hebrew mixed school in Tiberias. A technical sub-committee was appointed to prepare plans and estimates for these buildings for submission to the main Committee.

attitude (mentioned on 10th) Reuters correspondent at Lausanne understands that Mukhtar Bey and Sherif Bey, who have returned, are satisfied with the conversations with important business groups in London concerning prospective concessions in Asia Minor.

GREECE PACIFIC.

London, January 13. (Reuter)
(3.20 a.m.) A telegram from Athens in connection with recent representations regarding Greek military activities in West Thrace, says that the Foreign Minister gave the French Minister fresh categorical assurances of the pacific intentions of Greece.

BRITISH OFFICER KILLED.

London, January 13. (Reuter)
The correspondent of the Daily Mail at Constantinople telegraphs that artillery lieutenant Chapman, commanding the prison barracks in the Hali Pasha quarter, was found dead in Bosphorus boat house with four revolver wounds in his chest and throat. It is believed that he was murdered but the Turks allege suicide.

ANGORA FRIENDLY DISPOSED.

LAUSANNE, Jan. 13. (Reuter).
Hassan Bey on his return from London

A

This is the cutting ✓
referred to

at the next meeting of the
Sub Committee please press
for exact definition of
what is ~~to be~~ required
of you as a member of
this Sub Committee now
and at a later stage.

2

If Mr Bowman cannot
tell you, the matter should
be referred to the Main
Committee before ~~the~~ you

Date

Resident Engineer.

Account's in triplicate herewith.

The work ordered above was completed on

Jerusalem.

P. W. D.

Date

Director of Public Works.

To be charged to

take any further part in the Proceedings

③

As things are I do not understand whether you are a member of the Sub Committee in your capacity as an Architect or whether you represent the P.W.D.

Please carry out the following work:

④

If you are my representative I am unable to give you any instructions as the correspondence between C.S. and myself has so far failed to clear up the situation

Jerusalem.

P. W. D.

Local From O. W. 4

32/102

Daily Sales Report

FOOD SHOP

O.E.T.A.

J.P.W.

~~as per~~

Jan 24 / 22

John

W.H.

4. Dr. Lurie then submitted the requirements of the
Tehkimon Boys School at Lurie.

It was decided to refer the question of the symposium to
the main committee.

The floor space of the various rooms was then fixed (see
attached), and it was also decided that the hall should serve
for gymnastics also.

The question of providing a central gymnasium for Lurie
was brought up and referred to the main committee.

It was also decided that Messrs. Harrison and Kaufmann,
Mr. Ginsberg or the D.I.E. at Lurie, and the P.M.O., Lurie,
should visit the site before next meeting. Mr. Harrison would
inform Mr. Bowman and Dr. Henderson of the proposed date,
so that the D.I.E. and P.M.O. should be instructed in time
of the date of the visit.

5. It was decided that the details of the accommodation
required for the three schools should be circulated to all
the members (see attached).

It was also decided that Messrs. Harrison and Kaufmann
would bring forward at the next meeting proposals as to
specifications and estimates.

6. Mr. Kaufmann expressed the desirability of one or two
government representatives taking on the committee to adjudge
the plans received as a result of the competition for the
Jerusalem Secondary School.

After some discussion, Mr. Bowman made it clear that
the government would not be in a position to allow the sub-
committee, as such, to interfere in the matter; the sub-
committee must have its hands free in the selection of the
plans.

7. It was decided to hold the next meeting on Friday,
February 2nd, at 9 a.m.

Secretary to Committee.

[Signature]

P.W.D.M.O.
28 JAN 1933.
23/1

Details of floor-space requirements of the
three schools in question.

1. The Mixed School at Irbid.

50 sq. metres each.	do	40	do	a. 2 classrooms for 50 pupils,
do	do	30	do	b. 4 do for 40
do	do	30	do	c. 3 do for 30
do	do	25	do	d. 1 teachers' room
do	do	16	do	e. 1 headmaster's room
do	do	25	do	f. 1 room for school equipment
do	do	30	do	g. 2 rooms for housemasters
do	do	30	do	h. 1 reserve room
do	do	50	do	i. 1 hall for 300 persons, gymnastics,
200	do	do	do	etc.
20	do	do	do	j. 1 room for nurse and dispensary
do	do	20	do	k. 1 bathroom and spray for 30 pupils,
				may be in basement
				l. Corridors, stairs, and lavatories
				m. cloak room for (300) pupils.
				n. Drinking water and general water supply.

2. The Mixed Secondary School at Jerusalem.

50 sq. metres each	do	40	do	a. 2 classrooms for 42 pupils
do	do	40	do	b. 5 classrooms for 34 pupils
do	do	45	do	c. 1 demonstration room for science
do	do	45	do	d. 2 rooms for storing apparatus and
do	do	25	do	for preparation by demonstrators
do	do	25	do	e. 1 scientific laboratory, to hold
do	do	60	do	25 pupils at a time
do	do	60	do	f. 1 room for handwork for boys
do	do	40	do	g. 1 do do for girls
do	do	200	do	h. 1 gymnastic hall
do	do	200	do	i. 1 dressing room adjoining (h)
do	do	25	do	j. 1 hall to be used for dancing,
do	do	200	do	singing, entertainments, etc.
do	do	20	do	k. 1 room adjoining (j) for storing
do	do	20	do	models, drawing apparatus, etc.
do	do	20	do	l. 1 principal's room
do	do	20	do	m. 1 secretary's room
do	do	12	do	n. 1 caretaker's room, close to entrance
do	do	40	do	o. 1 teachers' room
do	do	20	do	p. 1 surgery and dispensary
do	do	40	do	q. 1 library and reading room
do	do	25	do	r. 1 room for apparatus, maps, etc.
do	do	25	do	s. caretaker's quarters; 2 rooms
do	do	45	do	t. 2 store rooms
				u. Lavatories for boys
				v. do for girls
				w. do for teaching staff
				x. shower baths for (3) pupils
				y. dressing room adjoining (x)
				z. stairs, hall, and corridors
				aa. cloak room
				ab. drinking water facilities, etc.

3. The Tekkumoni School for Boys at Jaffa.

60 sq. metres each	do	40	b. 6	do	for 40	do	40	a. 6 classrooms for 50 boys
do	do	30	c. 4	do	for 30	do	30	
do	do	40	d. 1 teachers' room				40	
do	do	20	e. 1 headmaster's room				20	
do	do	20	f. 1 room for nurse and dispensary				20	
do	do	60	g. 2 rooms for hand-work				60	
do	do	30	h. 1 room for apparatus, maps, etc.				30	
do	do	50	i. 1 reading room and library				50	
do	do	50	j. 1 bathroom and spray for boys				50	
do	do	30	k. 2 caretaker's rooms				30	
do	do	200	l. 1 hall for 300 pupils, gymnastics, etc.				200	
			m. corridors, stairs, etc.					
			n. lavatories					
			o. cloak rooms					
			p. drinking water facilities					
			q. 1 synagogue for 300 pupils					

Mr. Ginzberg asked that the number of laboratories should be specified. Dr. Henderson remarked that the P.H.D. regulations provided the necessary details as to number and type of laboratories in schools; he thought the number should be about 5 per cent of the number of pupils.

Mr. Ginzberg observed that, as far as he knew, the sanitary requirements in general of the P.H.D. in Palestine were about 20 per cent in excess of those of England, and that it would not be fair to expect so poor a country as Palestine to indulge in such luxuries. To this Dr. Henderson replied that the regulations of the P.H.D. were intended merely to serve as a model guide, but were not to be considered as binding, and that less than what was prescribed in those regulations would be accepted. Each case would be considered on its merits.

After some further discussion, Mr. Bowman declared the programme approved as amended, except that Mr. Harrison's approval could not be held as final until he was empowered by General Grant to give it.

(For floor-space requirements as amended, see attached.)

3.

The programme of the Secondary School at Jerusalem was then considered.

Mr. Ginzberg remarked that, according to the programme submitted, the floor space allotted per pupil was one square metre, and that that was not sufficient for a secondary school. He also saw no reason for the number of pupils (50 and 40) allotted to the various classes. He proposed to reduce the number of pupils, maintaining the total floor space of the classrooms as in the programme. After some discussion, it was decided to allot 1.25 square metres per pupil, and therefore to reduce the numbers from 50 and 40 to 42 and 34 respectively.

Mr. Bowman objected to having one room for both demonstration and practical work, and it was decided to amend items (b) and (c) as follows:-

- b. 1 demonstration room for science
- c. 1 scientific laboratory, to hold 25 pupils at a time

It was also decided to insert provision for cloak-rooms and water facilities.

Mr. Harrison observed that there still remained to be considered the question of lighting and ventilation, both natural and artificial, to be provided. It was decided that, when drawing up estimates and specifications, Messrs. Harrison and Keutmann should bear this question in mind.

(For floor-space requirements, as amended, see attached.)

This should not be taken as a final decision

The Kadoola Beguest Committee.

Minutes of the Proceedings of the 2nd Meeting
of the Technical Sub-Committee.

Monday, 22nd January, 1923, 9 a.m. to 12 noon.

Present:- Mr. E.R. Bowman (in the chair), Dr. M.

Boruchov, Mr. S. Ginsberg, Mr. A. Harrison,
Dr. J.A. Henderson, Mr. H. Kaufmann, and
Dr. J. Lurie.

Mr. Bowman made two statements to the following effect:-

(1) That General Grant, the Director of Public Works,
was not satisfied with the terms of reference of the Sub-
Committee, and that he wanted to obtain a ruling as to its
powers, and that, until such a ruling was obtained, Mr.
Harrison would serve on the sub-committee in a personal
capacity and not as representing his Department.

(2) That Mr. Bentwich had informed him that, from a
letter received by Sir Herbert Samuel from Sir John Shuckburgh,
it appeared that the Colonial Office required some enlighten-
ment on certain questions connected with the request, and
that, in view of the fact that the money was left according
to the will to His Majesty's Government, no actual disburse-
ments or commitments could be made before approval was
obtained from the Colonial Office. Therefore the Colonial
Office would have to be informed of the schools on the
erection of which it was proposed to spend the money, and
on what basis, and according to what programme, they were
to be built.

2.

The Sub-Committee then discussed the programme of the
Tiberias Mixed Elementary School.

After lengthy discussions, the following decisions were
arrived at:-

(1) That the partition walls of some of the classrooms
should be constructed in such a way as to render it possible,
without much trouble or great expense, to alter their
position, thus enabling certain classes to be expanded, if
and when necessity arose, at the expense of others.

(ii) That two rooms should be provided for handwork, one
for boys and one for girls.
(iii) That the classroom distribution should be amended
as follows:-

a. 2 classrooms for 50 pupils each,
do do do do do do

This would provide accommodation for the handwork mentioned
in (ii).

(iv) That the following be added:-

m. Provision for cloak-rooms.
n. Provision for drinking water, and general
water facilities.

Dr. Lurie, in reply to Mr. Ginsberg, stated that the
hall attached to the school was also intended to serve as a
General lecture and conference hall.



17a

W 3/9

25th January, 1923

Director of Education.

Subject :- Minutes of Kadoorie
Request Technical
Committee (Monday Jan.
22/23).

1. The last Section of
para 3 does not accurately reflect
what I remarked.
2. For "question of
lighting & ventilation both
natural & artificial" please
read "question of artificial
lighting & heating".

(Signed) A. S. B. H. H. H.

ARCHITECT P. V. D.

AM/1.
[Signature]



16a
WB/11/8

DISTRICT ENGINEER'S OFFICE
PUBLIC WORKS DEPT.
NORTHERN DISTRICT.

Haifa, January 19th 1923.

Director of Public Works
Jerusalem.

77a
Sub: Hebrew School Site at Tiberias.
Ref: Your telegram W.3/9 of 15th inst.

1. I inspected the Site with D.I.E. N.D., P.M.O. N.D., D.O. Tiberias & Headmaster Hebrew School Tiberias yesterday.
2. The site is situated about 250 Metres above the Lake level, on good open ground, is practically level over looking lake, with a natural drainage towards N.E. & S.
3. Area is about 11 donum and present proposals include wide roads to the frontages on the S. & W sides, and narrow Roads on other boundaries.
4. Class Rooms are to face the direction of Wind viz. West.
5. No plans of proposed building were produced nor was the actual site laid out on the ground but the situation in general is suitable for premises up to 400 or 500 Students etc.,

J. K.
DISTRICT ENGINEER,
NORTHERN DISTRICT.

PN/DH

Copy to Gov. N.D.
D.I.E.N.D.
P.M.O. N.D.
D.O. Tiberias.

File Kadome Request.
P.W.D.H.Q.

21 JAN 1923

File W 3/9
JERUSALEM

All correspondence should be addressed to:
The Director of Education, Jerusalem.

Address: P. O. Box 404.
Telegrams: "EDUCATION, JERUSALEM"
Telephone: Lazarist Exchange (4 lines).

15a

GOVERNMENT OF PALESTINE,
DEPARTMENT OF EDUCATION,
JERUSALEM.

In reply please quote:

No. 1447/PE

18. JAN. 1923


18th January 1923.

Sir,

I have the honour to forward you
herewith one copy each of

Conditions Generally Applicable
to Permits for Trade and
Industry;

Extracts from Special Conditions
for School Buildings and
Training Colleges; and
Sanitary Regulations with Respect
to Buildings used for Human
Habitation.

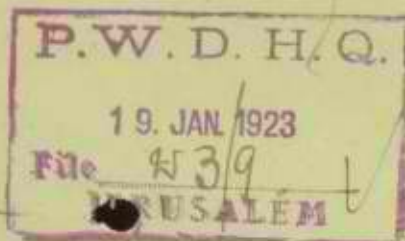


Dr. J.A.Henderson has been good enough
to supply these documents for the information
of the members of the Technical Sub-Committee
of the "Kadoorie Bequest Committee".

I have the honour to be,
Sir,

Your obedient servant,

CC
File W/3/9.

A.Harrison Esq., M.R.I.B.A.,
Public Works Department,
Jerusalem.

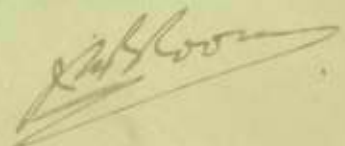
Secretary to Committee.

Extracts from

PUBLIC ESTABLISHMENTS, DANGEROUS & UNHEALTHY TRADES.

Special Conditions for school Buildings & Training Colleges.

All general conditions on License to be carried out with the following modifications and additions:-

1. SITE. (a) On the acquisition of a new site adequate open space in the neighbourhood of the building must be available in order to allow free circulation of air and to provide efficient natural light.
 (b) Sites of new buildings to be approved by P.H.D. (vide para. 1 General Conditions).
 (c) A playground adjoining the school must be provided, at least $\frac{1}{4}$ acre for each 100 children.

2. BUILDING. (a) There will be lighting of all class rooms so that natural light penetrates to all parts of the room, the predominant light for the left side of pupils. *What of vaults?*
 (b) Height of outside walls 15 feet, height of inside walls 13 feet. Windows will be arranged to have cross ventilation in every class room if possible. A ventilating window will be provided above the door as large as possible. *Why above door?*
 (c) Each class room will have the following floor space for each pupil:-

for Infants	}	12 square feet.
Elementary		
Primary		
Secondary	15	" "

- (d) Window space as in general conditions para.2, or $\frac{1}{4}$ of floor space where possible. The height of sills from the floor to be a minimum of 4 feet and height of windows $12\frac{1}{2}$ feet from floor.
- (e) Staircases to be at least 5 feet wide and to be of fire-proof material. Additional emergency exits to be provided from upper stories.
- (f) Paras.4 and 5 of General Conditions are specially important.
 Para.11 for "Workmen" read "All teachers, servants and pupils".
 Para.12 for "Employees" read as in para.11.
- (g) A cloak room with adequate ventilation must be provided.

3. GENERAL MEDICAL. (h) Adequate latrine accommodation, separate for boys and girls, to be provided. *? In messages!*
 Urinals with automatic flush are necessary for boys.

WATER SUPPLY. Drinking water supplies (para.13 Gen. Con.) Additional conditions to be observed.

- (a) A pump will be installed for every well. All openings to be sealed. No water will be drawn by bucket and rope or similar arrangement.
- (b) Two or more jets throwing column of water upwards will be provided for drinking purposes. The great danger from a common drinking mug is pointed out.
- (c) Drinking water to be analysed at suitable intervals and chlorinated on the advice of the P.H.D.

DIRECTOR OF HEALTH
GOVERNMENT OF PAKISTAN

THEORY OF THE PRACTICE OF THE ARTS

General Questions on the Theory of the Arts

1. General Questions on the Theory of the Arts
The following questions are suggested:-

- (a) What is the nature of the artistic process?
- (b) What is the nature of the artistic product?
- (c) What is the nature of the artistic environment?
- (d) What is the nature of the artistic community?
- (e) What is the nature of the artistic culture?

(a) What will be the nature of the artistic process?

It is the process of the transformation of the material into the artistic form.

The process is a creative one, and it is a process of discovery.

The process is a process of discovery, and it is a process of discovery.

The process is a process of discovery, and it is a process of discovery.

The process is a process of discovery, and it is a process of discovery.

The process is a process of discovery, and it is a process of discovery.

The process is a process of discovery, and it is a process of discovery.

The process is a process of discovery, and it is a process of discovery.

The process is a process of discovery, and it is a process of discovery.

The process is a process of discovery, and it is a process of discovery.

The process is a process of discovery, and it is a process of discovery.

The process is a process of discovery, and it is a process of discovery.

The process is a process of discovery, and it is a process of discovery.

The process is a process of discovery, and it is a process of discovery.

The process is a process of discovery, and it is a process of discovery.

The process is a process of discovery, and it is a process of discovery.

The process is a process of discovery, and it is a process of discovery.

The process is a process of discovery, and it is a process of discovery.

The process is a process of discovery, and it is a process of discovery.

The process is a process of discovery, and it is a process of discovery.

The process is a process of discovery, and it is a process of discovery.

The process is a process of discovery, and it is a process of discovery.

The process is a process of discovery, and it is a process of discovery.

The process is a process of discovery, and it is a process of discovery.

The process is a process of discovery, and it is a process of discovery.

The process is a process of discovery, and it is a process of discovery.

The process is a process of discovery, and it is a process of discovery.

The process is a process of discovery, and it is a process of discovery.

The process is a process of discovery, and it is a process of discovery.

The process is a process of discovery, and it is a process of discovery.

The process is a process of discovery, and it is a process of discovery.

The process is a process of discovery, and it is a process of discovery.

The process is a process of discovery, and it is a process of discovery.

The process is a process of discovery, and it is a process of discovery.

The process is a process of discovery, and it is a process of discovery.

The process is a process of discovery, and it is a process of discovery.

The process is a process of discovery, and it is a process of discovery.

cc
File W/3/9
ASB

10a
The number of children 223
Classes 8

OPEN COMPETITION.

The Education Department of the Palestine Zionist Executive publishes details of the competition for the preliminary plans for the Tiberias Elementary School.

1. The building plot is marked on the map with the letters A,B,C,D,E,F. On the north and east side there is a view of the Lake of Tiberias.
2. The Plans are to be based on the following particulars which should be observed in principle.

- unclg
- (a) 2 schoolroom for 50 pupils, 50 sq.metres.
 - (b) 4 schoolrooms for 40 pupils, each room 40 sq.metres.
 - (c) 3 schoolrooms for 30 pupils, each room 30 sq.metres.
 - (d) 1 room for teachers, 25 sq.metres.
 - (e) 1 room for headmaster, 16 sq.metres.
 - (f) 1 room for school equipment, 25 sq.metres.
 - (g) 2 rooms for housemasters, 30 sq.metres.
 - (h) 1 reserve room, 50 sq.metres.
 - (i) Hall for 300 persons, also for Gymnastics, 200 sq. metres.
 - (j) 1 room for Nurse and dispensary, 20 sq.metres.
 - (k) 1 bathroom and spray for 30 boys, this may be in the basement.
 - (l) The necessary corridors, stairs and lavatories.
 - (m) ~~unclg~~ Cook Rooms.

The height of the class rooms from floor to ceiling, must not be less than 4.5 metres. The building must be a two story house, a third story will not be allowed.

On designing the building the limited means available must be taken into consideration.

3. The following sketches are required:

- (a) General plan 1:500
- (b) Plan of all stories 1:200
- (c) Principal view 1:100
- (d) All other views 1:200
- (e) Sections in length and breadth 1:200
- (f) Perspective view of outside of building.

OPEN COMPETITION.

The Education Department of the Palestine Ministry Executive published details of the competition for the preliminary plans for the Al-Ramleh elementary school.

1. The building plot is marked on the map with the letters A, B, C, D, E, F. On the north and east sides there is a view of the Lake of Tiberias.

2. The plans are to be based on the following principles which should be observed in principle.

- (a) 1 schoolroom for 50 pupils, 50 sq. metres.
- (b) 1 schoolroom for 40 pupils, each room 40 sq. metres.
- (c) 1 schoolroom for 30 pupils, each room 30 sq. metres.
- (d) 1 room for teachers, 25 sq. metres.
- (e) 1 room for headmaster, 15 sq. metres.
- (f) 1 room for school library, 10 sq. metres.
- (g) 2 rooms for housemasters, 30 sq. metres.
- (h) 1 reserve room, 30 sq. metres.
- (i) Hall for 300 persons, also for gymnastics, 200 sq. metres.
- (j) 1 room for nurses and dispensary, 30 sq. metres.
- (k) 1 bathroom and spray for 30 boys, this may be in the basement.
- (l) The necessary corridors, stairs and lavatories.

The height of the class room from floor to ceiling must not be less than 4.3 metres. The building must be a two-story house, a third story will not be allowed. On designing the building the limited means available must be taken into consideration.

3. The following sketches are required:

- (a) General plan 1:500
- (b) Plan of all stories 1:200
- (c) Principal view 1:100
- (d) All other views 1:200
- (e) Sections in length and breadth 1:200
- (f) Perspective view of outside of building.

Concerning the perspective view, the corner nearest the projecting plan² must be scaled to 1:100. The plans, views and sections are to be drawn without colours. The bisected parts may be coloured. Framed pictures may be submitted without glass.

4. An Explanatory Report is to be given containing special details of the project and of the proposed method of construction. Further, a checkable calculation of the cubical capacity of the building must also be given.

5. The plans are to be submitted under a pseudonym which must be written on every piece.

6. An extra closed envelope must be sent. On the outside the pseudonym must be written, and inside the name of the competitor.

7. An index of everything submitted, ^{must} also be enclosed.

8. Plans may be submitted until February 28th 1923, to the Education Department. Regarding plans sent through the post, the date of the postmark will be considered decisive. They must not be folded, and sent with strong covering, which should bear the address "Education Department Jerusalem, Zionist Executive, Competition Project for Tiberias", with also the pseudonym. The name of the competitor must not be written on any part of the scheme delivered, except in the special envelope.

9. The sum arranged for prizes amounts to £.80. It is proposed to distribute the following prizes:

one first prize £.50

one second prize £. 30.

Concerning the perspective view, the corner nearest the projecting plane must be scaled to 1:100. The plans, views and sections are to be drawn without colours. The dissected parts may be coloured. Framed pictures may be submitted without glass.

4. An explanatory report is to be given containing special details of the project and of the proposed method of construction. Further, a checkable calculation of the optical capacity of the building must also be given.

5. The plans are to be submitted under pseudonyms which must be written on every piece.

6. An extra closed envelope must be sent. On the outside the pseudonym must be written, and inside the name of the competitor.

7. An index of everything submitted also be enclosed.

8. Plans may be submitted until February 28th 1933, to the Education Department. Regarding plans sent through the post, the date of the postmark will be considered decisive. They must not be folded, and sent with strong covering, which should bear the address "Education Department, Elmsfield, Elmsfield Executive, Competition Project for Tibetans", with also the pseudonym. The name of the competitor must not be written on any part of the scheme delivered, except in the special envelope.

9. The sum arranged for prizes amounts to £80. It is

proposed to distribute the following prizes:

one first prize £50

one second prize £30.

The Judges, however, have the right to divide the sum available in a manner different to the above. The Education Department has the right to buy further plans at the price of £.20 each. After the decision of the Judges, ^{the project} ~~and the time and place~~ will be exhibited to the public. The decision of the Judges and the time and place of the exhibition will be announced in the Press. All plans awarded prizes or plans purchased are the possession of the Education Department, and may be used by it as far as the building of the school is concerned. The plans not awarded prizes may be recovered from the Education Department. Plans not recovered will be returned four weeks after the close of the exhibition when the special envelopes will be opened.

10. The Education Department on principle intends to discuss with the prizewinner the carrying into effect of the plans, but no guarantees can be given that this will be done.

11. The Judges will be:

1. School Doctor Borochoy.
2. Bezalel Yaffe, Chairman of the Building Commission of the Education Department.
3. Dipl:Eng: Max Hecker, head of the preparatory work for the Technical School.
4. Dipl:Eng: Architect Richard Kauffmann, Architect of the Palestine Land Development Company.
5. Dr. Lurie, Director of the Education Department.
6. Architect Barsky nominated by the Jerusalem Technical Society.

In the event of one of the Judges being prevented from carrying out his duties, the Competition Promoters have the right to appoint a substitute.

(SGD): M. Ussishkin

CHAIRMAN
PALESTINE ZIONIST EXECUTIVE.

The Judges, however, have the right to divide the sum available in a manner different to the above. The Education Department has the right to buy further plans at the price of £2.50 each. After the decision of the Judges ~~and the time and~~ places will be exhibited to the public. The decision of the Judges and the time and place of the exhibition will be announced in the Press. All plans awarded prizes or plans purchased are the possession of the Education Department, and may be used by it as far as the building of the school is concerned. The plans not awarded prizes may be recovered from the Education Department. Plans not recovered will be returned four weeks after the close of the exhibition when the special envelopes will be opened.

10. The Education Department on principle intends to discuss with the prizewinner the carrying into effect of the plans, but no guarantees can be given that this will be done.

11. The Judges will be:

1. School Doctor Borochov.
2. Samuel Yaffe, Chairman of the Building Commission of the Education Department.
3. Mr. Max Hecker, head of the preparatory work for the Technical School.
4. Mr. Richard Kaufmann, Architect of the Palestine Land Development Company.
5. Mr. Lurie, Director of the Education Department.
6. Architect Barak nominated by the Jerusalem Technical Society.

In the event of one of the Judges being prevented from carrying out his duties, the Competition Promoters have the right to appoint a substitute.

(Signed): M. Ussishkin

CHAIRMAN
PALESTINE ZIONIST EXECUTIVE.

Children 143 9a
Higher classes 6

OPEN COMPETITION

FOR PLANS FOR SCHOOL BUILDING

1. The Committee for the building of the Jerusalem Secondary School announces herewith an open competition for preliminary plans for the building of a Secondary School in Jerusalem.
2. A site of about 5,200 sq.metres in extent has been allotted for the building and is marked on the attached maps (1:500 and 1:2000), by the letters A,B,C,D,E,F,G, and by 2 flags on the photograph which is taken from the East. The site lies at the western extremity of the town on the summit of a hill from which there is a free outlook east, south and west and which is easily visible from most parts of the town. It lies close to and just below the site of the Monastery and School of St.Pierre generally called by the name of Ratisbon. On the north eastern side of Jansiriah which was bought some time ago by the J.N.F. and the P.L.D.C. and which is destined to be a new garden suburb the highest corner has been allocated for the building. The site of the Secondary School will be defined on two sides by buildings of the above quarter. On the western side an elementary school will be built and on the southern side private houses. New roads have been planned to the north and east of the site and it is expected that their junction will be a crossing in the future. In the plan for the Jansiriah Quarter it has been arranged that the principal front of the Secondary School shall be fixed at a distance of 13 metres behind the eastern boundary of the site, but the architect is quite at liberty to propose alterations for this.
3. The ground of the site is composed of rocks which are visible or lying just under the surface of the ground. The rocks are hard compact limestone "Jewish Mizzi" and are coloured yellowish and reddish. These stones are regularly used for building in all districts.

The exterior walls at any rate will be built from these stones, which are obtainable on the spot.

4. The building will include the following rooms:

a.	Two class rooms for 50 pupils	each 50	sq. metres	in extent.
a.	Five class rooms for 40 pupils	40	"	"
b.	One room for physics and chemistry	45	"	"
c.	One room for experiments & physical apparatus	25	"	"
d.	One room for experiments and chemical apparatus	25	"	"
e.	One room for nature study	45	"	"
f.	One room for handwork for boys	60	"	"
g.	One room for handwork for girls	40	"	"
h.	Gymnastic Hall	200	"	"
i.	Adjoining dressing room	25	"	"
j.	Entertainment Hall to be used for drawing and singing	200	"	"
k.	A room for models and drawing apparatus adjoining	20	"	"
l.	A Director's room	20	"	"
m.	A Secretary's room	12	"	"
n.	A porter's room close to entrance	18	"	"
o.	A teachers' room	40	"	"
p.	A surgery and dispensary	20	"	"
q.	A library and reading room	40	"	"
r.	Apparatus and map room	25	"	"
s.	Porter's quarters, 2 rooms and a kitchen	45	"	"
t.	Two store rooms			
u.	Lavatory for boys			
v.	Lavatory for girls			
w.	Lavatory for teachers			
x.	Shower bath			
y.	Adjoining dressing room			
z.	Stairs, hall and corridor			

Chapel Room.

The possibility of a later enlargement of the building is to be contemplated.

5. The explosion of the stones on the ground of the building suggests that the space thereby obtained might be used for cellars.

In the cellars it will be possible to arrange for rooms number 7, 8, 17, 20, 21, 25 and 26. The interior height of the rooms should not be less than 4.50 metres. It is necessary to arrange the class rooms chiefly on the western side because on that side the rays of the sun do not penetrate during school hours and from that side the cooler western winds blow in summer. Since the entertainment Hall will serve also for general purpose it should be arranged with an easy entrance from the outside. The gymnasium and lavatories be built separate from the

school building.

6. In the arrangement of the external designs of the building consideration must be given to the special character of the district generally and to ^{the} elevated position of the site in particular. On the other hand, the limited financial means at our disposal enforces the prevention of any unnecessary expenditure, ^{externally} ~~externally~~ and ^{internally} ~~internally~~.

7. In addition to the building itself it is necessary to provide a place for a piece of ground to be used for gymnastics, a playground and a garden to give facilities for the pupils to learn gardening.

8. The following plans are required:

- a. A general map scale 1:500
- b. Plans of all ~~studies~~ ^{studies}, scale 1:200
- c. The principal view scale, 1:100
- d. Remaining views, scale 1:200
- e. Longitudinal and Latitudinal sections 1:200
- f. Perspective of exterior of building
- g. The scale for the corner nearest to the projecting plane in the picture should be 1:100.
- h. The plans, elevations and sections should be denoted only by lined drawings without colours. Framed drawings will be only admitted without glass.

9. It is necessary to include an explanatory report of the details of the plan and the method of execution. Further a checkable calculation of the cubical capacity of the building must be included, as well as an index of all drawings and notes submitted.

10. The projects must be submitted under a pseudonym which must be indicated on every paper.

11. A sealed envelope must be enclosed on which the pseudonym must be written and which must contain the name of the competitor.

12. Plans must be submitted before the 20th October 1922. Those which are forwarded by post must be posted at the latest on that day and the post mark will be considered decisive. Plans which arrive a month later than the above date will not be considered. Each

school building.

3. In the arrangement of the exterior design of the building and location must be given to the special character of the district in which it and the elevated position of the site in particular. On the other hand, the limited financial means at our disposal enforce the provision of any unnecessary expenditure, extravagance and luxury.

4. In addition to the building itself it is necessary to provide a place for a piece of ground to be used for recreation, a playground and a garden to give facilities for the pupils in their recreation.

5. The following plans are required:

- a. A General map scale 1:500
- b. Plans of all classes, scale 1:200
- c. The external view scale 1:100
- d. Remaining views, scale 1:200
- e. Longitudinal and cross-sectional sections 1:200
- f. Perspective of exterior of building
- g. The house for the corner house to the projecting house in the plan should be 1:100.
- h. The plans, elevations and sections should be drawn and by line drawings without colors. Printed drawings will be only admitted without lines.

6. It is necessary to include an explanatory report of the details of the plan and the section of a section. Further a concise calculation of the financial cost of the building must be included, as well as an index of all drawings and notes submitted.

7. The projects must be submitted under a pseudonym which must be indicated on every paper.

8. A sealed envelope must be enclosed on which the name must be written and which must contain the name of the competitor.

9. Plans must be submitted before the 20th October 1922. Those which are forwarded by post must be posted at the latest on that day and the post mark will be considered decisive. Plans which arrive a month later than the above date will not be judged.

competitor must send his plans in an envelope addressed:

Plans for Secondary School,
P.O.Box 33,
JERUSALEM.

with his pseudonym. The name of the competitor must not be mentioned on any part of the plans except on the note enclosed in the sealed envelope.

13. The amount of the prizes is fixed at £.120, which it is proposed to divide as follows:-

1st prize	--	£.50
2nd "	--	40
3rd "	--	30

The judges are at liberty to divide the amount allocated for the prizes in the manner different to the above. In order to equalise as far as possible the value of the prizes in countries where the rate of exchange is higher or lower, the prizes will only be paid at their full rate in the event that the prize winner is a resident of Palestine or of a country of high rate of exchange. If the successful competitor is from a country of low rate of exchange (taking into consideration the value of prizes awarded there) he will be given only half of the prize as fixed in £.(Pounds Egyptian). If as a result a certain amount of the total allocated for prizes is left over, the remainder will be given for additional prizes. The judges may propose the purchase of other plans ~~and~~ at a price of £.15 each.

14. After the decision of the judges has been given the plans will be shown at a public exhibition. The decision of the judges and the time and place of the exhibition will be announced in the press.

15. All the plans which gain awards or which are bought become the possession of the Committee which has the right to make use of them in so far as the building of the Secondary School is concerned. The competitor has the right of publishing his plans.

competitor must send his plans in an envelope addressed:

Plans for Secondary School,
P.O. Box 5,
Jerusalem.

with his pseudonym. The name of the competitor must not be mentioned on any part of the plans except on the note enclosed in the sealed envelope.

12. The amount of the prizes is fixed at £100, which is to

be shared as follows:-

1st prize	£50
2nd "	40
3rd "	30

The judges are at liberty to divide the amount allocated for the prizes in the manner different to the above. In order to equalise as far as possible the value of the prizes in countries where the rate of exchange is higher or lower, the prizes will only be paid at their full rate in the event that the prize winner is a resident of a country of high rate of exchange. If the suggestion for competition is from a country of low rate of exchange (taking into consideration the value of prizes awarded there) he will be given only half of the prize as fixed in A. Jordan's system. If as a result a certain amount of the total allocated for prizes is left over, the remainder will be given for additional prizes. The judges may propose the purchase of other prizes and at a price of £10 each.

13. After the decision of the judges has been given the plans will be shown at a public exhibition. The decision of the judges and the time and place of the exhibition will be announced in the press.

14. All the plans which gain awards or which are bought become the possession of the Committee which has the right to make use of them in no way in the building of the Secondary School is suggested. The competitor has the right of withdrawing his plans.

16. Plans which do not receive a reward can be recovered at the Jerusalem Secondary School. Those which are not claimed four weeks after the close of the exhibition will be sent to the competitor after the sealed envelopes have been opened.

17. The Committee may enter into negotiations for the detailed working out of the plan with one of the successful competitors, but it does not take any obligation on this matter.

18. The judges will consist of:

1. Dr. J. Luria, Jerusalem, representing the Palestine Zionist Executive.
2. Mr. Richard Kauffman, Architect, representing the J.N.F.
3. Mr. Salant, Architect, representing the Technical Society Jerusalem.
4. Prof. Shatz, Director of the Bezalel.
5. Mr. M. Hecker, Chairman of the Committee for the Building of the Jerusalem Secondary School.

In the event that one of the judges is prevented from carrying out his duties, the Committee is empowered to appoint a substitute.

(SGD): M. Hecker.

16. Plans which do not receive a reward can be recovered at the
Jerusalem Secondary School. Those which are not claimed four weeks
after the close of the exhibition will be sent to the committee
after the seals envelopes have been opened.

17. The Committee may enter into negotiations for the sale of
working out of the plan with one of the successful competitors, but
it does not take any obligation on this matter.

18. The Judges will consist of:

1. Dr. J. Barak, representing the Ministry of Education.
2. Mr. Michael Kaufman, Architect, representing the J.N.S.
3. Mr. Salant, Architect, representing the Technical School, Jerusalem.
4. Prof. Shatz, Director of the Bessalal.
5. Mr. M. Becker, Chairman of the Committee for the Exhibition of the Jerusalem Secondary School.

In the event that one of the Judges is prevented from attending his duties, the Committee is empowered to appoint a substitute.

(300): V. Becker.

D.P.W. .

1a -

6a

~~ASTON~~

BF Monday to me File
File File

W. P. D.

張

TOTALS
Cr. Ford.

TOTAL	add. Stock	on hand	Cr. Ford.	TOTAL
-------	------------	---------	-----------	-------

8a



The Kadoorie Bequest.

Summary of proceedings of the technical sub-committee,
held in the Education Department on Monday, 15th
January 1923, at 9 a.m.

There were present:- Mr. H.B.Bowman (in the chair),
Dr. M.Boruchov, Mr. S.Ginsberg, Mr. A.Harrison,
Dr. J.B.Henderson, Mr. Kaufmann, and Dr. J.Lurie.

Mr. Bowman opened the meeting and explained the object and duties of the sub-committee. He added that the High Commissioner was especially anxious that the plans and details of the buildings should be carefully scrutinized by the Government representatives, as the Government was responsible for the carrying out of the terms of the will.

Dr. Lurie inquired who would be responsible for the final approval of the plans, and also suggested that, wherever a school was to be built, a local committee should be formed for the purpose of supervising the work.

Mr. Bowman replied that the sub-committee were to submit their reports to the main committee; as regards the suggestion, it would be referred to the main committee.

Mr. Harrison submitted that it was not desirable to examine the actual drawings and plans before the programme and specifications of the buildings were examined and passed by the sub-committee.

After some discussion, it was decided that the sub-committee should examine the programmes which served as basis for the competitions, as a result of which the plans had been submitted both of the Jerusalem and Tiberias schools. Dr. Lurie undertook to let the members have copies of the translations of these programmes during the week.

As regards the Jaffa school, Dr. Lurie undertook to place before the committee at their next meeting the requirements that the school would be expected to fulfil, so that a programme

could be drawn up.

It was then decided that the Public Health, Public Works, and Education Departments should take steps to ascertain that the site of the Tiberias school was suitable. As regards the Jerusalem site, the members visited it after the meeting. ~~XXXX~~


Mr. Harrison asked whether guidance could be given as to the cost of the buildings, and Dr. Lurie mentioned, as a rough estimate, that the cost would probably be ££.10,000 for the Jerusalem Gymnasium, ££.6,000 for the Tiberias School, and ££.10,000 for the Jaffa school. This question was left over for the present.

It was also decided that the site at Jaffa should be visited at an early date by both the official and the unofficial members.

The next meeting was fixed for Monday, 22nd January 1923, at 9 a.m., in the Education Department.

15.1.23.

John G. Brown
Secretary.

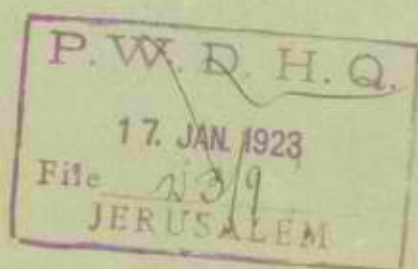

Prefix	الاشارة	Orig. No.	الترقية الاصلية	PALESTINE POSTS AND TELEGRAPHS. ادارة البريد والتلغراف في فلسطين הדואר והמברקה, פלושתינה (א"י)		Office Date Stamp ختم المكتب חותם המשרד 
Time	המשך	Words	המספר המקורי			
Sent to	הזמן		מילים	In case of Official Telegrams. I certify that this Telegram is on the Service of Public Works Dept.		Charges Paid القيمة المدفوعة
At	הזמן		אשרל אל			
By	הזמן		נשלח ל	Remarks	מلاحظات	Signature.....
			ביום		הערות	Rank Director of Public Works
			על ידי			תשלום נדוש

To	Diseng Haifa					
	15th	arrange	with	D I E	Haifa to	inspect and
	report	on site of	proposed	Jewish	School	Tiberias
	urgent					

From	מ	NOTE:—Name and address of senders, if not to be telegraphed, should be written in the space provided at the back of the form. לאחסן אלא לאן אים ושולחן המשלוח יבואו בזה המרחב הערה: אם אין שם ושולחן של השולח נכללים במספר צריך להחכם מעבר לדף בטופס זה במקום המיועד לכך.
	2	

PALESTINE POSTS AND TELEGRAPHS.

CONDITIONS OF ACCEPTANCE.

The Department will not be responsible for any loss, damage or inconvenience occasioned by reason of any error, delay or failure in transmission of this telegram, either in Palestine, or on the system of any other Administration through which it may pass.

Signature.....

Address.....

ادارة البريد والتلغراف في فلسطين

شروط القبول

الادارة غير مسؤولة من اي خياع او عطل او عدم ملاءمة تسببت عن اي غلطة او تاخير في ارسال التلغراف او عدم ارساله اذا كان في منطقة فلسطين او اي ادارة اخرى
يمكن ان يمر بها

.....
الامضاء

.....
العنوان

הדאר והמברקה פלשתינה (א"י)

תנאי קבלת המברקים

אין משרד המברקה מקבל עליו כל אחריות לאבוד, נזק, או אי נעמיות שיזכרו
לדגלי איזו טעות, עיכוב או מניעה במסירת המברק הזה בין בפלשתינה (א"י) ובין דרך
כל ממשלה אחרת שדרכה יעבר המברק.

.....
החתימה

.....
המען

6a

21-
12 January, 1944.

Chief Secretary

Subject :- Indonesian Request
for Recognition - Letter of 12.1.44
of 12.1.44.

5a
→

Mr. Davidson, F.O.I.S.,

is detailed as the U.S.
representative.

(Signed) G. G. [unclear]

Mr. Davidson, F.O.I.S.

Copy to
Mr. Davidson,
F.O.I.S.

A



Adm.445.

January 5 1923.

Director of Public Works.

Subject : Kadoorie Schools Bequest.
Reference: Your W3/9 of the 28th of
December.

As the Kadoorie Bequest has been accepted by the Government for the construction of schools which will be the property of the Government, it is considered that the representatives of the Government on the Committee must take their share of responsibility for the carrying out of the work.


It is agreed that, as you say in the 3rd para. of your letter, full technical and financial responsibility will rest upon the Committee. What is desired is that you should appoint a representative on the Committee who will take his share of responsibility as a member of the Committee and will not act simply in an advisory capacity.

The technical Sub-Committee will meet for the first time on Monday, January 15th, at 9 A.M., in the office of the Director of Education. I should be grateful, therefore, if you would nominate an officer of your Department to represent the interests of Government upon the technical Sub-Committee in respect to the Public Works' aspect of the execution of the Bequest, and instruct him to attend the first and subsequent meetings of the Sub-Committee.

Max Jurock
CHIEF SECRETARY

PC
rule
Copy to
Chairmen of the Committee,
(Mr. Bentwich)

MM/MJ

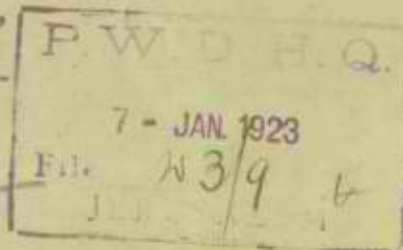



153

153

Adm.445.

December 20, 1922.
43rd


Director of Public Works. ✓

Subject : Kadoorie Bequest Schools.
Reference: Your W.3/9 of December 12th.

The position about the Kadoorie Bequest is that the money has been left to the Palestine Government for the purpose of building schools and the Government has accepted the Bequest. It has, at the same time, accepted the recommendation of the trustees of the Estate that the whole of the building should be done by Jewish labour.

Presumably the plans, estimates, etc. will be prepared by a Jewish architect, but will be subject to the supervision of your Department. If, however, you think it important that the plans and estimates, and placing of contracts, as well as the supervision of the work, should be controlled directly by your Department, that is a matter which the Committee should consider.

If, on the other hand, you are disposed to acquiesce in the plan that the function of your Department should be that of supervision, your representative on the proposed sub-Committee would doubtless be in a position to prescribe the manner in which the work is to proceed.

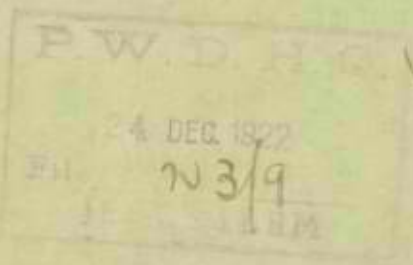

MN/MJ

A.S.(A).
For Chief Secretary.

SPW
27/12

W.5/9.

December 28th, 1922. *4a*

Chief Secretary,

73a

Sub :- Kadcorie Schools Request.
Ref :- Your Adm. 445 of 23-12-22.

1. I am of opinion that the function of the P.W.D. should be strictly limited to acting in an advisory capacity to the committee charged with dealing with the Request.
2. The Committee should be informed that the P.W. Department will not exercise supervision over the preparation of plans and estimates, the drawing up of contract documents, invitation of tenders, adjudication of tenders, execution of work, or works accounts.
3. Full Technical and Financial responsibilities will rest upon the Committee.

(Signed) P. G. GRANT

DIRECTOR OF PUBLIC WORKS.

PGG/D.
PGG

2/2.

10th December, 1922.

Chief Secretary

Sir Ellis Kadoorie Bequest.

The A.C. requests me to detail a P.W.D. representative for service with a technical Sub Committee of a Committee dealing with the disposition of the above.


Will you please define the duties (if any) of the P.W.D. in regard to this bequest and particularly in regard to

- (a) preparation of Plans
- (b) preparation of Estimates
- (c) preparation of Contract Documents
- (d) placing of Contracts
- (e) Supervision of work.

(Signed) P. C. GRANT

DIRECTOR OF PUBLIC WORKS.

P.C.G./M.

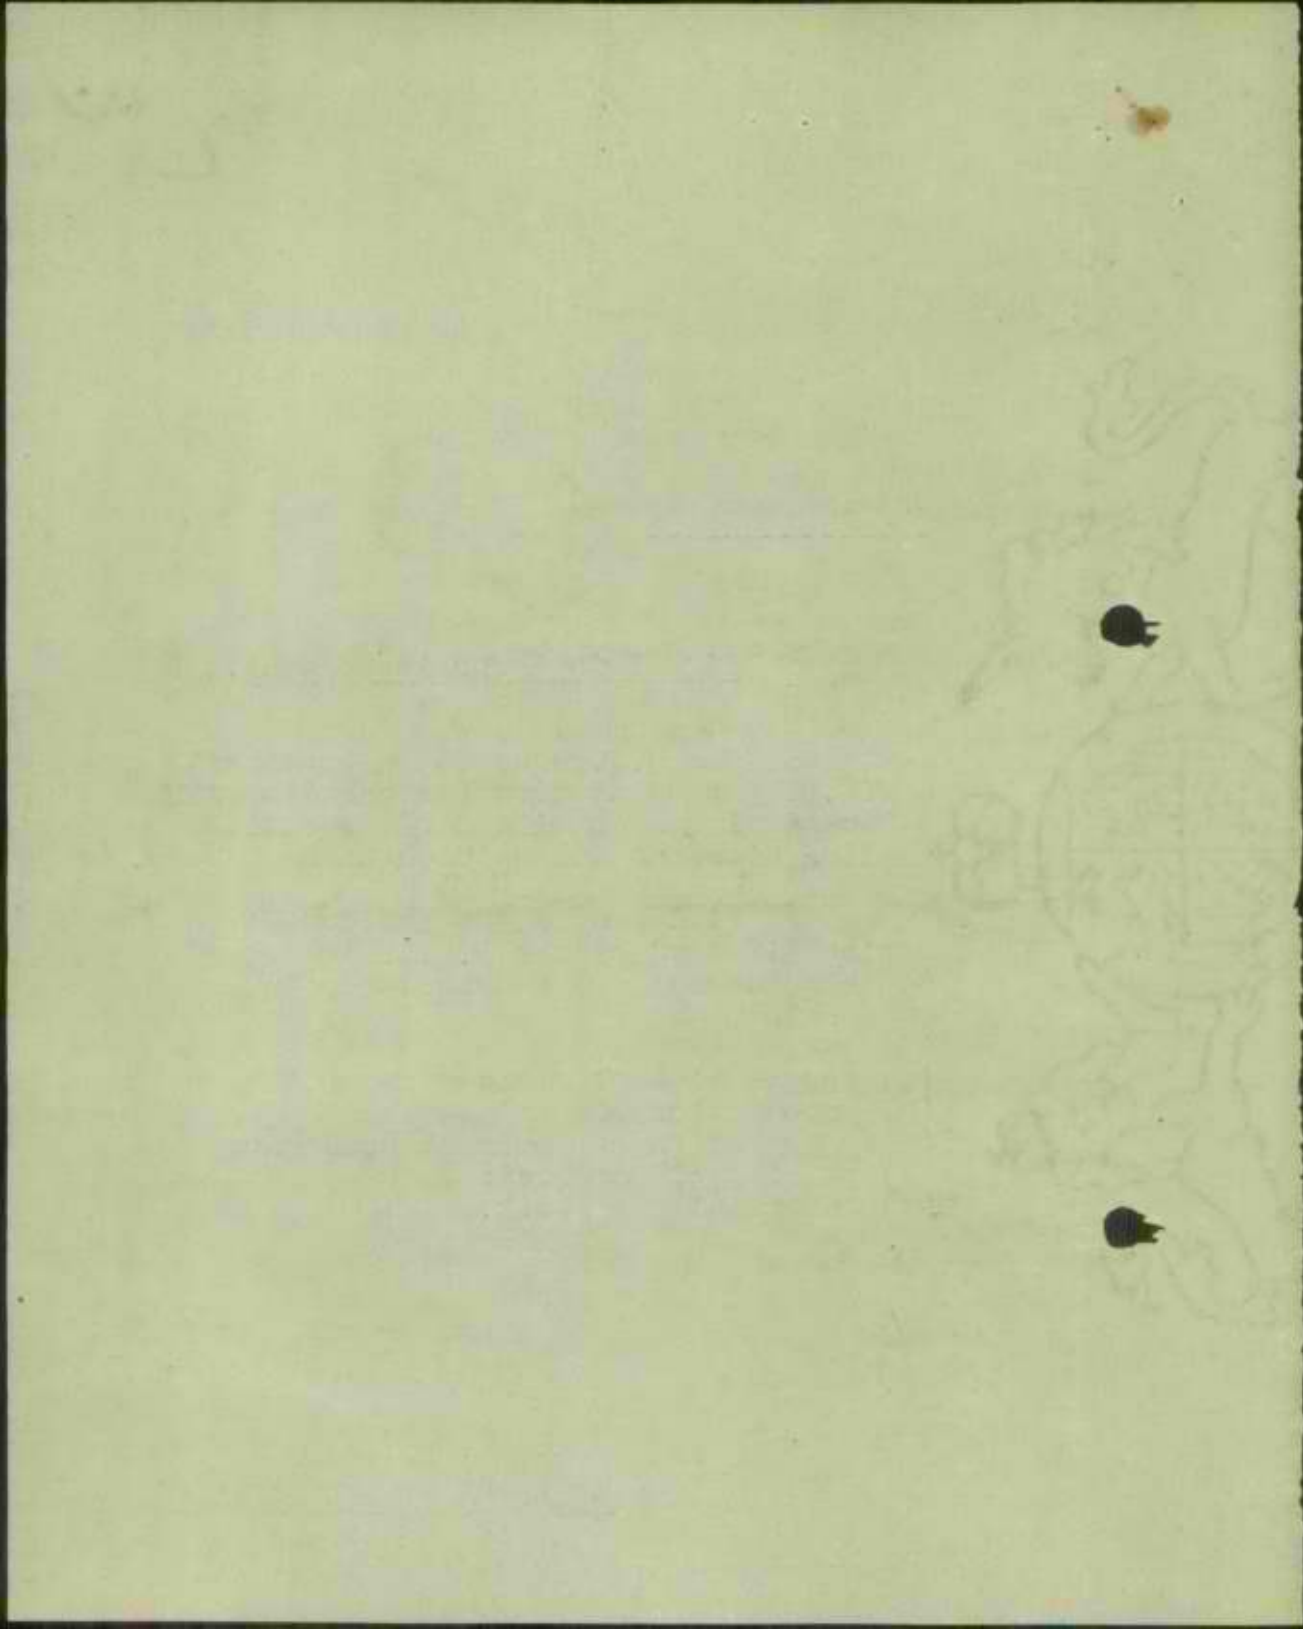

L.S. 1214

December 10, 1922.

Director of Public Health.
 Director of Public Works.

The Government of Palestine has accepted the bequest of the late Sir Ellis Kadoorie of a considerable sum, estimated between £E 70,000 and £E 100,000 to be devoted for the purpose of the erection of Jewish Schools in Palestine. A Committee has been formed to deal with the disposition of the bequest on which there are three Government members, Mr. Bowman, Mr. Ginzberg, the Inspector of Education, and myself, and three representatives of the Jewish Educational Committees.

The Committee decided at its first meeting on Friday to proceed at once with the consideration of plans for the construction of three schools, and it was resolved that a technical sub-committee should be appointed for considering the plans for the schools.

It is a condition of the trustees of the Will that the schools should be built with Jewish labour, but the Government as the legatees would have to approve of the plans. I should be glad if you would nominate a representative of your Department as soon as possible to serve on the sub committee, over which Mr. Bowman will preside, and which will include three Government representatives, one each from the Education, Public Health, and Public Works Departments, and an architect or engineer, ~~Public Health representative~~ and an educationalist appointed by the Zionist Organisation.



6 B. t. u. i. d.

ATTORNEY GENERAL

J.P.W.
 12/11

